



MMS1X00-NS400-SKY

Mellanox® MMS1X00-NS400 Compatible 400GBase-DR4 QSFP112 Transceiver (SMF, 1310nm, 500m, MPO, DOM) CMIS 5.0

Product Description

This Mellanox® compatible QSFP112 transceiver provides 400GBase-DR4 throughput up to 500m over single-mode fiber (SMF) using a wavelength of 1310nm via an MPO connector. It can operate at temperatures between 0 and 70C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with Mellanox®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Skylane's transceivers are RoHS compliant and lead-free.

Features:

- Compliant with IEEE Std 802.3bs and 802.3ck on 400Gbps Optical and Electrical Interfaces
- 4x106.25G PAM4
- Compliant with 400G-DR4 Optical Specifications
- CMIS 5.0 Interface
- Transmission Distance: Up to 500m SMF
- MPO-12 Receptacles
- Single 3.3V Power Supply
- Compliant with QSFP112 MSA
- RoHS Compliant and Lead-Free
- Operating Temperature: 0 to 70 Celsius



Applications:

- 400GBase Ethernet
- Access and Enterprise

For your product safety, please read the following information carefully before any manipulation of the transceiver:



ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Storage Temperature	Tstg	-40		85	°C	
Operating Case Temperature	Tc	0	25	70	°C	
Relative Humidity	RH	15		85	%	
Supply Voltage	Vcc	-0.5		3.6	V	
Data Rate	DR		53.125			
Modulation Format			PAM4			

Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage	Vcc	3.135	3.3	3.465	V	
Power Supply Current	Icc			2.55	A	
Power Dissipation	P _{DISS}			8	W	
Transmitter						
Input Differential Impedance	ZIN		100		Ω	
Differential Data Input Swing	VIN,pp	180		900	mVp-p	
Receiver						
Output Differential Impedance	ZOUT		100		Ω	
Differential Data Input Swing	VOUT,pp	300		850	mVp-p	1

Notes:

1. Internally AC coupled but requires a external 100Ω differential load termination.

Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Transmitter						
Center Wavelength Range	λ_C	1304.5		1317.5	nm	
Side-Mode Suppression Ratio	SMSR	30			dB	
Average Launch Power Per Lane	P	-2.9		4	dBm	
Outer Optical Modulation Amplitude Per Lane	OMA _{outer}	-0.8		4.2	dBm	
Transmitter and Dispersion Penalty Eye Closure for PAM4 Per Lane	TDECQ			3.4	dB	
Launch Power in OMA _{outer} Minus TDECQ Per Lane (Minimum)		-2.2			dBm	
Extinction Ratio	ER	3.5			dB	
Average Launch Power of Off Transmitter	P _{off}			-15	dBm	
Optical Return Loss Tolerance	ORLT			21.4	dB	
Transmitter Reflectance				-26	dB	
Receiver						
Lane Wavelengths	Λ	1304.5		1317.5	nm	
Receiver Sensitivity Per Lane (OMA _{outer})				-4.4	dBm	1
Stressed Receiver Sensitivity (OMA _{outer}) Per Lane	OMA			-1.9	dBm	1
Receiver Overload (P _{avg})	POL	4			dBm	
Damage Threshold	POL	5			dBm	
Receive Power Per Lane (OMA _{outer})	OMA			4.2	dBm	
Receiver Reflectance	ORL			-26	dB	
LOS De-Assert	LOSD			-10	dBm	
LOS Assert	LOSA	-16			dBm	
LOS Hysteresis		0.5			dB	

Notes:

1. Measured with PRBS31Q test pattern @53.125GBd with PAM4 modulation and BER<2.4E⁻⁴.



Pin Descriptions

Pin	Symbol	Name/Description	Plug Sequence	Notes
1	GND	Transmitter Ground (Common with Receiver Ground).	1	1
2	Tx2-	Transmitter Inverted Data Input.	3	
3	Tx2+	Transmitter Non-Inverted Data Output.	3	
4	GND	Transmitter Ground (Common with Receiver Ground).	1	1
5	Tx4-	Transmitter Inverted Data Input.	3	
6	Tx4+	Transmitter Non-Inverted Data Output.	3	
7	GND	Transmitter Ground (Common with Receiver Ground).	1	1
8	ModSelL	Module Select.	3	
9	ResetL	Module Reset.	3	
10	VccRx	+3.3V Receiver Power Supply.	2	3
11	SCL	2-Wire Serial Interface Clock.	3	
12	SDA	2-Wire Serial Interface Data.	3	
13	GND	Transmitter Ground (Common with Receiver Ground).	1	1
14	Rx3+	Receiver Non-Inverted Data Output.	3	
15	Rx3-	Receiver Inverted Data Output.	3	
16	GND	Transmitter Ground (Common with Receiver Ground).	1	1
17	Rx1+	Receiver Non-Inverted Data Output.	3	
18	Rx1-	Receiver Inverted Data Output.	3	
19	GND	Transmitter Ground (Common with Receiver Ground).	1	1
20	GND	Transmitter Ground (Common with Receiver Ground).	1	1
21	Rx2-	Receiver Inverted Data Output.	3	
22	Rx2+	Receiver Non-Inverted Data Output.	3	
23	GND	Transmitter Ground (Common with Receiver Ground).	1	1
24	Rx4-	Receiver Inverted Data Output.	3	
25	Rx4+	Receiver Non-Inverted Data Output.	3	
26	GND	Transmitter Ground (Common with Receiver Ground).	1	1
27	ModPrsL	Module Present.	3	
28	IntL/RxLOS	Interrupt.	3	2
29	VccTx	+3.3V Transmitter Power Supply.	2	3
30	Vcc1	+3.3V Power Supply.	2	3
31	LPMoDe/TxDis	Low-Power Mode.	3	
32	GND	Transmitter Ground (Common with Receiver Ground).	1	1
33	Tx3+	Transmitter Non-Inverted Data Input.	3	
34	Tx3-	Transmitter Inverted Data Output.	3	
35	GND	Transmitter Ground (Common with Receiver Ground).	1	1
36	Tx1+	Transmitter Non-Inverted Data Input.	3	
37	Tx1-	Transmitter Inverted Data Output.	3	
38	GND	Transmitter Ground (Common with Receiver Ground).	1	1


Notes:

1. QSFP112 uses common ground (GND) for all signals and supply (power). All are common within the QSFP DD module, and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal common ground plane. Each connector GND contact is rated for a maximum current of 500mA.
2. This is an open collector/drain output that, on the host board, requires a 4.7kΩ to 10kΩ pull-up resistor to the Host_Vcc.
3. VccRx, Vcc1, and VccTx shall be applied concurrently. For power classes 4 and above, the module differential loading of input voltage pads must not result in exceeding contact current limits. Each connector Vcc contact is rated for a maximum current of 1500mA.


Module Pad Layout

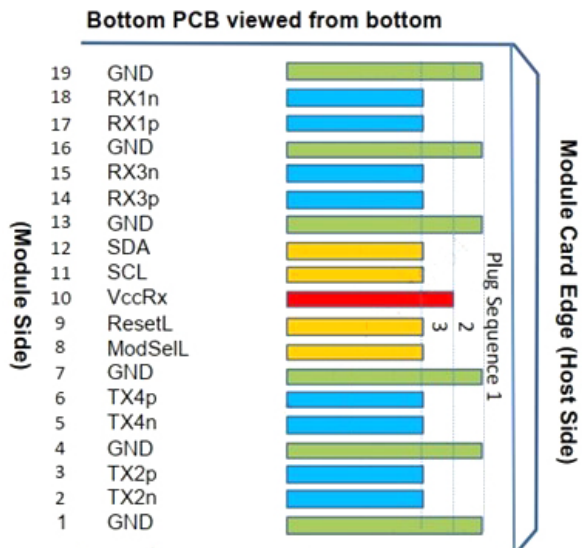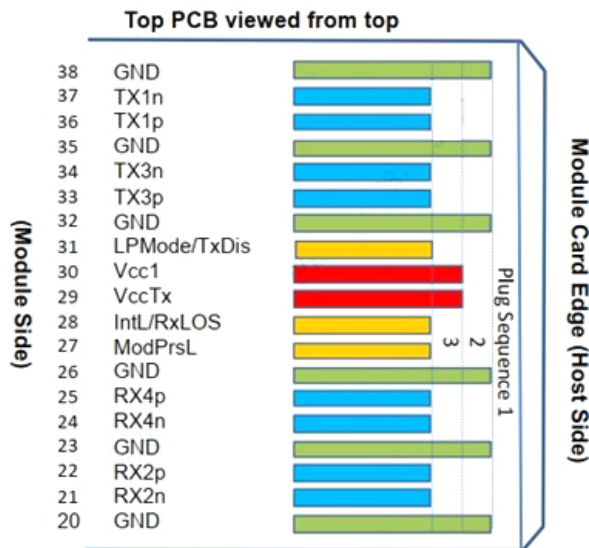


Recommended Host Board Power Supply Filter Network

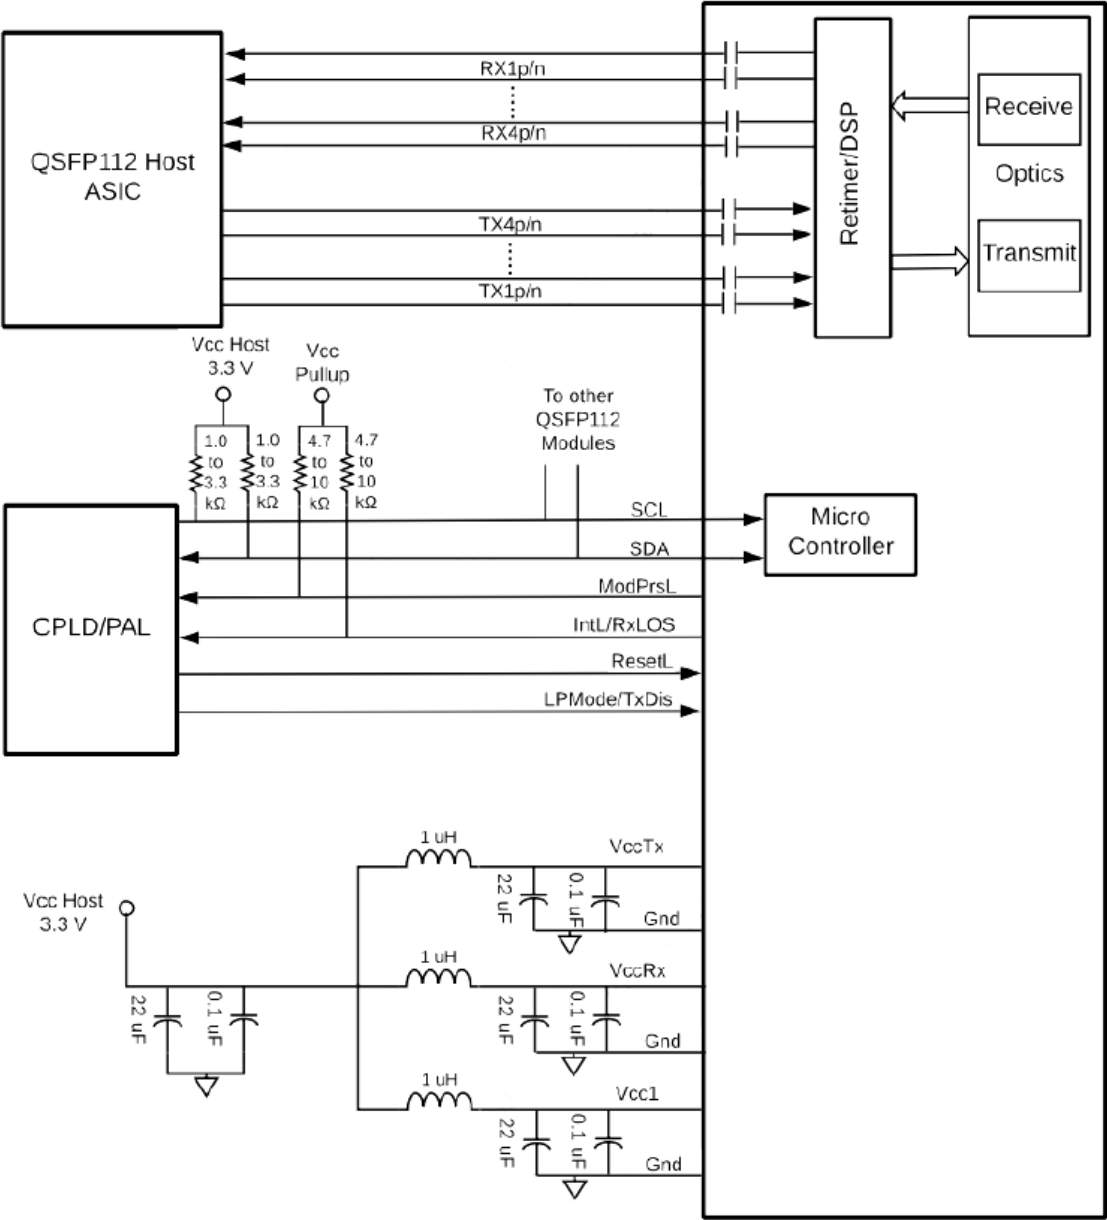

Mechanical Specifications



Unit:mm

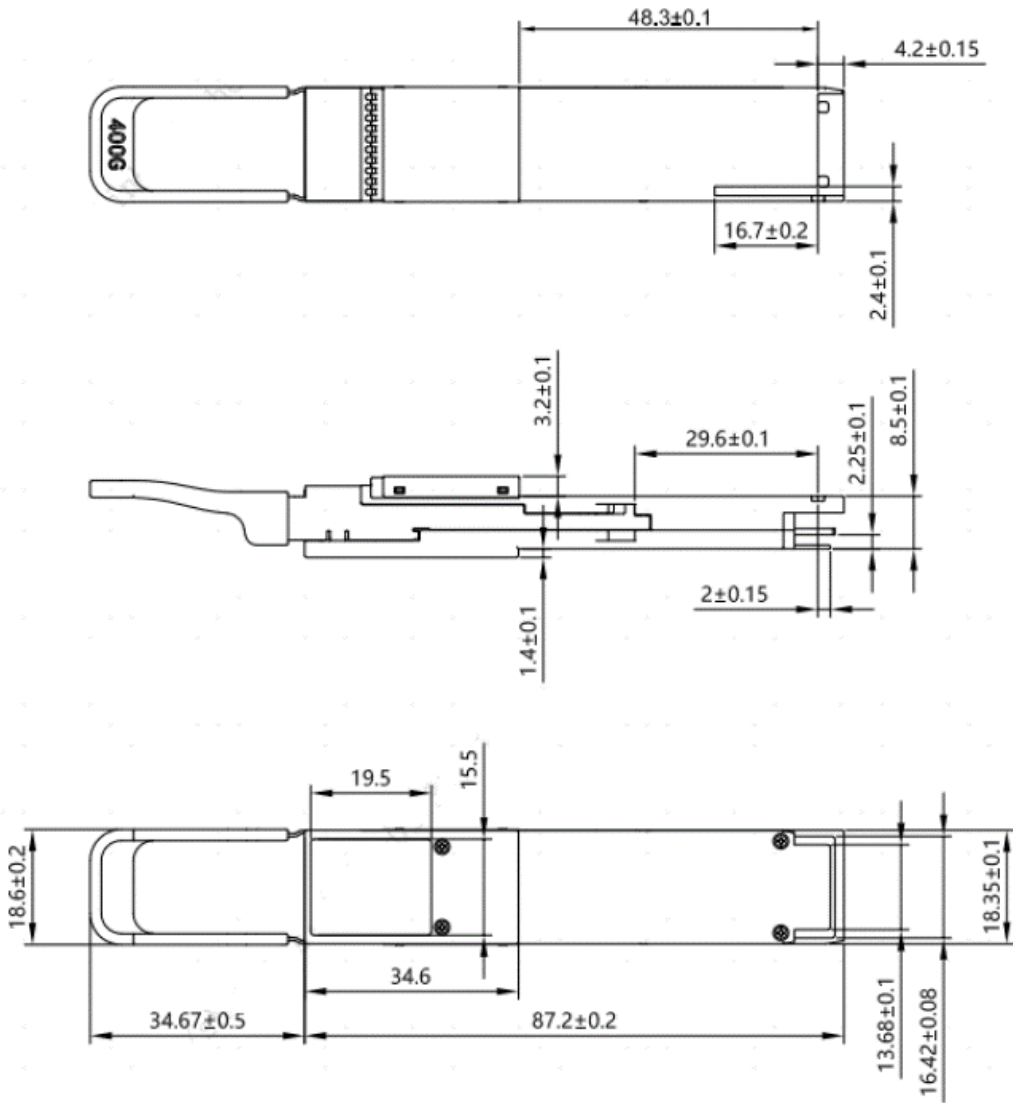

About Skylane Optics

Skylane is a leading provider of transceivers for optical communication.

We offer an extensive portfolio for the enterprise, access, datacenter and metropolitan fiber optical market as well as for smart home applications and home networks.

We cover the European, South American and North American market with a strong partner network and have offices in Belgium, Brazil, Sweden and USA.

Our offerings are characterized by high quality and performance. In combination with our strong technical support, we enable our customers to build cost optimized network solutions.

We offer an extensive range of high-quality products including transceivers (Optical and copper), Active Optical Cable (AOC), Direct Attach Cable (DAC), Mux/Demux, Coding Box.

