



## Q2B32010C00FK9M

HP® Compatible 100GBase-BX QSFP28 Transceiver Single Lambda (SMF, 1331nmTx/1271nmRx, 10km w/FEC, LC, DOM)

### Product Description

This HP® compatible QSFP28 transceiver provides 100GBase-BX throughput up to 10km w/host FEC over single-mode fiber (SMF) using a wavelength of 1331nmTx/1271nmRx via an LC connector. This bidirectional unit must be used with another transceiver or network appliance of complementing wavelengths. It can operate at temperatures between 0 and 70C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with HP®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Skylane's transceivers are RoHS compliant and lead-free.

### Features:

- Compliant with 100G Lambda MSA 100G-LR Specifications
- Single 3.3V Power Supply
- Compliant with SFF-8636 Rev 2.10a
- Single-mode Fiber
- Bidi LC Connectors
- Power dissipation
- Hot Pluggable
- Commercial Temperature 0 to 70 Celsius
- Excellent ESD Protection
- Metal with Lower EMI
- RoHS Compliant and Lead Free



### Applications:

- 100GBase Ethernet
- Datacenter

---

*For your product safety, please read the following information carefully before any manipulation of the transceiver:*



#### ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



#### LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

*The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.*

---

## Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4.
- ESD to the LC Receptacle: compatible with IEC 61000-4-3.
- EMI/EMC: compatible with FCC Part 15 Subpart B Rules, EN55022:2010.
- Laser Eye Safety: compatible with FDA 21CFR, EN60950-1& EN (IEC) 60825-1, 2.
- RoHS: compliant with EU RoHS 2.0 directive 2015/863/EU.

## Absolute Maximum Ratings

| Parameter                  | Symbol            | Min. | Typ. | Max. | Unit | Notes |
|----------------------------|-------------------|------|------|------|------|-------|
| Maximum Supply Voltage     | V <sub>CC</sub>   | -0.5 |      | 3.6  | V    |       |
| Storage Temperature        | T <sub>stg</sub>  | -40  |      | 85   | °C   |       |
| Operating Case Temperature | T <sub>c</sub>    | 0    |      | 70   | °C   |       |
| Relative Humidity          | RH                | 5    |      | 85   | %    |       |
| Damage Threshold           | RX <sub>dmg</sub> | 5.5  |      |      | dBm  |       |

## Electrical Characteristics

| Parameter                                 | Symbol                         | Min.  | Typ. | Max.  | Unit  | Notes                   |
|-------------------------------------------|--------------------------------|-------|------|-------|-------|-------------------------|
| Power Supply Voltage                      | V <sub>CC</sub>                | 3.135 | 3.3  | 3.465 | V     |                         |
| Power Dissipation                         | P <sub>DISS</sub>              |       |      | 4.5   | W     |                         |
| Transmitter                               |                                |       |      |       |       |                         |
| Differential Data Input Swing Per Lane    |                                | 900   |      |       | mVp-p |                         |
| Differential Input Impedance              | Z <sub>IN</sub>                | 90    | 100  | 110   | Ω     |                         |
| DC Common-Mode Voltage (V <sub>cm</sub> ) |                                | -350  |      | 2850  | mV    |                         |
| Receiver                                  |                                |       |      |       |       |                         |
| Differential Output Amplitude             |                                |       |      | 900   | mVp-p |                         |
| Differential Output Impedance             | Z <sub>OUT</sub>               | 90    | 100  | 110   | Ω     |                         |
| Output Rise/Fall Time                     | T <sub>r</sub> /T <sub>f</sub> | 12    |      |       | ps    | 20-80%                  |
| Eye Width                                 |                                | 0.57  |      |       | UI    |                         |
| Eye Height Differential                   |                                | 228   |      |       | mV    | @TP4, 1E <sup>-15</sup> |
| DC Common-Mode Voltage (V <sub>cm</sub> ) |                                | -350  |      | 2850  | mV    | 1                       |

## Notes:

1. V<sub>cm</sub> is generated by the host. Specification includes effects of ground offset voltage.

## Optical Characteristics

| Parameter                                        | Symbol      | Min.   | Typ.   | Max.                 | Unit  | Notes |
|--------------------------------------------------|-------------|--------|--------|----------------------|-------|-------|
| <b>Transmitter</b>                               |             |        |        |                      |       |       |
| Signaling Speed                                  |             |        | 53.125 |                      | GBd   |       |
| Modulation Format                                |             | PAM4   |        |                      |       |       |
| Center Wavelength                                | $\lambda_C$ | 1324.5 | 1331   | 1337.5               | Nm    |       |
| Side-Mode Suppression Ratio                      | SMSR        | 30     |        |                      | dB    |       |
| Extinction Ratio                                 | ER          | 3.5    |        |                      | dB    |       |
| Transmit OMA                                     | TxOMA       | 0.7    |        | 4.7                  | dBm   |       |
| Transmit Average Power                           | TxAVG       | -1.4   |        | 4.5                  | dBm   | 1     |
| Launch Power in OMA <sub>outer</sub> Minus TDECQ |             | -0.7   |        |                      | dBm   | 2     |
| Launch Power in OMA <sub>outer</sub> Minus TDECQ |             | -0.6   |        |                      | dBm   | 3     |
| Transmitter and Dispersion Eye Closure           | TDECQ       |        |        | 3.4                  | dB    |       |
| Launch Power of Off Transmitter Per Lane         |             |        |        | -30                  | dBm   |       |
| Relative Intensity Noise                         | RIN         |        |        | -136                 | dB/Hz |       |
| Optical Return Loss Tolerance                    |             |        |        | 15.6                 | dB    | 4     |
| Transmitter Reflectance                          |             |        |        | -26                  | dB    |       |
| <b>Receiver</b>                                  |             |        |        |                      |       |       |
| Signaling Speed                                  |             |        | 53.125 |                      | GBd   |       |
| Center Wavelength                                | $\lambda_C$ | 1264.5 | 1271   | 1277.5               | Nm    |       |
| Damage Threshold                                 |             | 5.5    |        |                      | dBm   |       |
| Receive Power (OMA <sub>outer</sub> )            | RxOMA       |        |        | 4.7                  | dBm   |       |
| Average Receive Power                            | RxAVG       | -7.7   |        | 4.5                  | dBm   |       |
| Receiver Sensitivity (OMA <sub>outer</sub> )     | SenOMA      |        |        | MAX (-6.1, SECQ-7.5) | dBm   | 5     |
| Stressed Sensitivity                             | SRS         |        |        | -4.1                 | dBm   |       |
| Receiver Reflectance                             |             |        |        | -26                  | dB    |       |
| LOS Assert                                       | LOSA        | -26    |        | -12                  | dBm   |       |
| LOS De-Assert                                    | LOSD        |        |        | -10                  | dBm   |       |

### Notes:

1. Average launch power (minimum) is informative and not the principal indicator of signal strength. A transmitter with launch power below this value cannot be compliant; however, a value above this does not ensure compliance.
2. For ER $\geq$ 4.5dB.
3. For ER<4.5dB.
4. Transmitter reflectance is defined looking into the transmitter.
5. Sensitivity is specified at  $2.4 \times 10^{-4}$  BER.

## Pin Descriptions


| Pin | Logic       | Symbol  | Name/Descriptions                     | Notes |
|-----|-------------|---------|---------------------------------------|-------|
| 1   |             | GND     | Module Ground.                        | 1     |
| 2   | CML-I       | Tx2-    | Transmitter Inverted Data Input.      |       |
| 3   | CML-I       | Tx2+    | Transmitter Non-Inverted Data Output. |       |
| 4   |             | GND     | Module Ground.                        | 1     |
| 5   | CML-I       | Tx4-    | Transmitter Inverted Data Input.      |       |
| 6   | CML-I       | Tx4+    | Transmitter Non-Inverted Data Output. |       |
| 7   |             | GND     | Module Ground.                        | 1     |
| 8   | LVTLL-I     | ModSelL | Module Select.                        |       |
| 9   | LVTLL-I     | ResetL  | Module Reset.                         |       |
| 10  |             | VccRx   | +3.3V Receiver Power Supply.          | 2     |
| 11  | LVC MOS-I/O | SCL     | 2-Wire Serial Interface Clock.        |       |
| 12  | LVC MOS-I/O | SDA     | 2-Wire Serial Interface Data.         |       |
| 13  |             | GND     | Module Ground.                        |       |
| 14  | CML-O       | Rx3+    | Receiver Non-Inverted Data Output.    |       |
| 15  | CML-O       | Rx3-    | Receiver Inverted Data Output.        |       |
| 16  |             | GND     | Module Ground.                        | 1     |
| 17  | CML-O       | Rx1+    | Receiver Non-Inverted Data Output.    |       |
| 18  | CML-O       | Rx1-    | Receiver Inverted Data Output.        |       |
| 19  |             | GND     | Module Ground.                        | 1     |
| 20  |             | GND     | Module Ground.                        | 1     |
| 21  | CML-O       | Rx2-    | Receiver Inverted Data Output.        |       |
| 22  | CML-O       | Rx2+    | Receiver Non-Inverted Data Output.    |       |
| 23  |             | GND     | Module Ground.                        | 1     |
| 24  | CML-O       | Rx4-    | Receiver Inverted Data Output.        | 1     |
| 25  | CML-O       | Rx4+    | Receiver Non-Inverted Data Output.    |       |
| 26  |             | GND     | Module Ground.                        | 1     |
| 27  | LVTTL-O     | ModPrsL | Module Present.                       |       |
| 28  | LVTTL-O     | IntL    | Interrupt.                            |       |
| 29  |             | VccTx   | +3.3V Transmitter Power Supply.       | 2     |
| 30  |             | Vcc1    | +3.3V Power Supply.                   | 2     |
| 31  | LVTTL-I     | LPMode  | Low-Power Mode.                       |       |
| 32  |             | GND     | Module Ground.                        | 1     |
| 33  | CML-I       | Tx3+    | Transmitter Non-Inverted Data Input.  |       |
| 34  | CML-I       | Tx3-    | Transmitter Inverted Data Output.     |       |
| 35  |             | GND     | Module Ground.                        | 1     |

|    |       |      |                                      |   |
|----|-------|------|--------------------------------------|---|
| 36 | CML-I | Tx1+ | Transmitter Non-Inverted Data Input. |   |
| 37 | CML-I | Tx1- | Transmitter Inverted Data Output.    |   |
| 38 |       | GND  | Module Ground.                       | 1 |


#### Notes:

1. GND is the symbol for signal and supply (power) common for the QSFP28 module. All are common within the QSFP28 module, and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal-common ground plane.
2. VccRx, Vcc1, and VccTx are the receiver and transmitter power supplies and shall be applied concurrently. Recommended host board power supply filtering is shown below. VccRx, Vcc1, and VccTx may be internally connected within the QSFP28 transceiver module in any combination. The connector pins are each rated for a maximum current of 1000mA.

#### Electrical Pin-Out Details

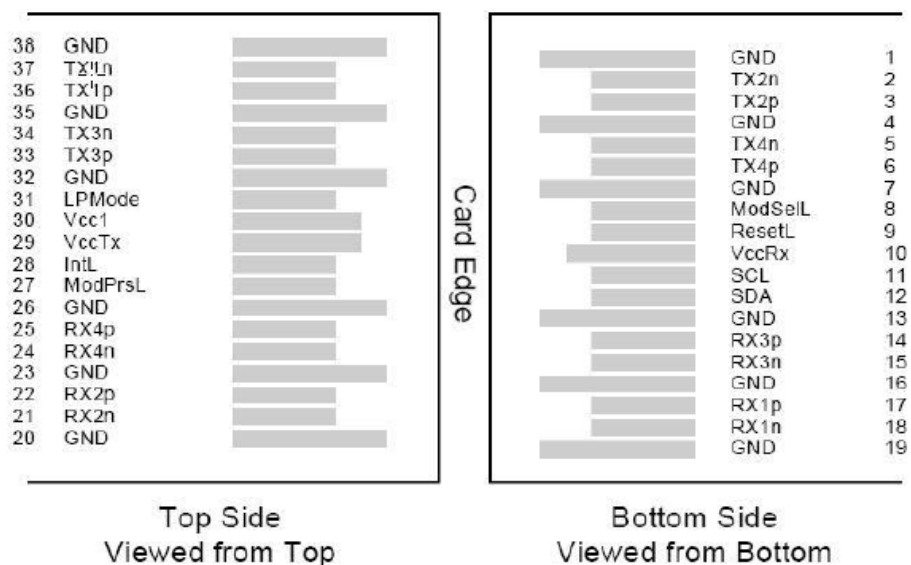

Mechanical Specifications

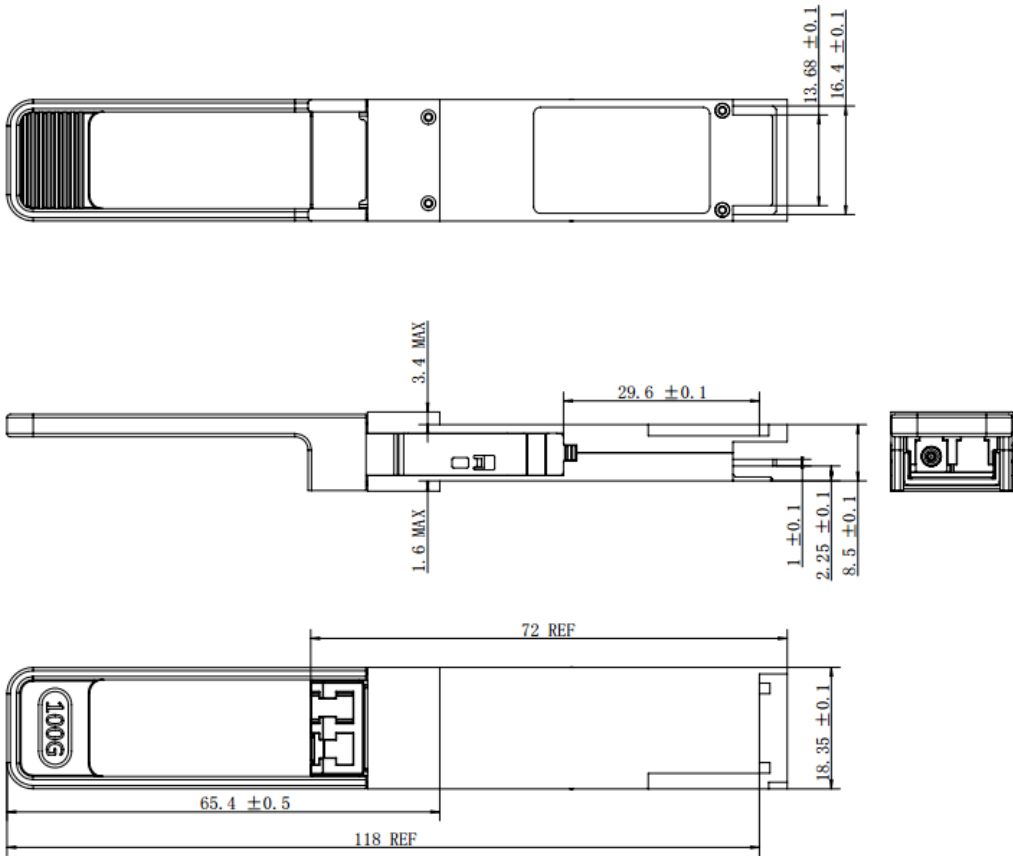

# About Skylane Optics

Skylane is a leading provider of transceivers for optical communication.

We offer an extensive portfolio for the enterprise, access, datacenter and metropolitan fiber optical market as well as for smart home applications and home networks.

We cover the European, South American and North American market with a strong partner network and have offices in Belgium, Brazil, Sweden and USA.

Our offerings are characterized by high quality and performance. In combination with our strong technical support, we enable our customers to build cost optimized network solutions.

We offer an extensive range of high-quality products including transceivers (Optical and copper), Active Optical Cable (AOC), Direct Attach Cable (DAC), Mux/Demux, Coding Box.

