



Q2B49040C02FGMS

Alcatel-Lucent Nokia® Compatible 100GBase-BX ER1 PAM4 QSFP28 Transceiver Single Lambda (SMF, 1304.58nmTx/1309.14nmRx, 40km, LC, DOM)

Product Description

This Alcatel-Lucent Nokia® Compatible QSFP28 transceiver provides 100GBase-BX ER1 throughput up to 40km over single-mode fiber (SMF) using a wavelength of 1304.58nmTx/1309.14nmRx via an LC connector. This bidirectional unit must be used with another transceiver or network appliance of complimenting wavelengths. It is also capable of withstanding rugged environments and can operate at temperatures between -40 to 85C. It is guaranteed to be 100% compatible with the equivalent Alcatel-Lucent Nokia® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. We stand behind the quality of our products and proudly offer a

Skylane's transceivers are RoHS compliant and lead-free.

Features:

- Compliant with QSFP28 MSA
- Compliant with SFF-8636
- Hot Pluggable
- EML Class 1 Laser
- Supports Single 53.125GBd Optical Lane
- Compliant with SFF-8661
- Up to 40km on 9/125µm SMF
- APD Receiver
- Operating Temperature: -40 to 85 Celsius
- Single 3.3V Power Supply
- RoHS Compliant and Lead-Free



Applications:

- 100GBase Ethernet
- Datacenter

For your product safety, please read the following information carefully before any manipulation of the transceiver:



ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 /JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Storage Temperature	Tstg	-40		85	°C	
Operating Case Temperature	Tc	-40		85	°C	
Relative Humidity	RH	15		85	%	
Supply Voltage	Vcc	-0.5		3.6	V	
Data Rate	DR		53.125 ± 100ppm			
Bit Error Rate	BER			2.4E ⁻⁴		1
Supported Link Length on 9/125µm SMF @53.125GBd	L			40	km	2

Notes:

1. Tested with a PRBS31Q test pattern for 53.125GBd operation.
2. Distance is based on FC-P1-6 Rev. 3.1 and IEEE 802.3 standards with FEC.

Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage	Vcc	3.13	3.3	3.47	V	
Power Supply Current	Icc			1435	mA	
Power Dissipation	P _{DISS}			4500	mW	
Transmitter						
Input Differential Impedance	ZIN	90	100	110	Ω	
Differential Data Input Swing	VIN,pp	180		900	mVp-p	
Receiver						
Output Differential Impedance	ZOUT	90	100	110	Ω	
Differential Data Input Swing	VOUT,pp	300		900	mVp-p	

Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Transmitter						
Center Wavelength Range	λ_C	1303.54	1304.58	1305.63	nm	
Average Launch Optical Power	Po	1.7		7.1	dBm	1
Launch Optical Power (OMA)	POMA	4.7		7.9	dBm	2
		3.3+TDECQ				3
Extinction Ratio	ER	5			dB	
Transmitter and Dispersion Penalty Eye Closure for PAM4	TDECQ			3.9	dB	
RIN ₁₅ OMA (Maximum)	RIN			-136	dB/Hz	
Optical Return Loss Tolerance	ORLT			15	dB	
POUT @Tx_Disable Asserted	Poff			-15	dBm	
Receiver						
Center Wavelength	λ_C	1308.09	1309.14	1310.19	nm	
Receiver Power (Pave)		-16		-3.4	dBm	
Receiver Sensitivity (OMA)	RxSENS_OMA			-13.8	dBm	
				-15.2+TECQ	dBm	2
Receiver Sensitivity (Pave)	RxSENS_Pave			-14	dBm	4
				-15.4+TECQ	dBm	
Receiver Reflectance				-26	dB	
LOS De-Assert	LOSD			-16	dBm	
LOS Assert	LOSA	-24			dBm	
LOS Hysteresis		0.5			dB	

Notes:

1. Class 1 Laser Safety per FDA/CDRH and EN (IEC) 60825 regulations.
2. TDECQ < 1.4dB.
3. $1.4\text{dB} \leq \text{TDECQ} \leq \text{TDECQ (maximum)}$.
4. $1.4\text{dB} \leq \text{TDECQ} \leq 3.9\text{dB}$.
5. Measured with PRBS31Q test pattern @53.125GBd with $\text{BER} < 2.4\text{E}^{-4}$.

Pin Descriptions


Pin	Logic	Symbol	Name/Description	Notes
1		GND	Module Ground.	1
2	CML-I	Tx2-	Transmitter Inverted Data Input.	
3	CML-I	Tx2+	Transmitter Non-Inverted Data Input.	
4		GND	Module Ground.	1
5	CML-I	Tx4-	Transmitter Inverted Data Input.	
6	CML-I	Tx4+	Transmitter Non-Inverted Data Input.	
7		GND	Module Ground.	1
8		ModSelL	Module Select.	2
9		ResetL	Module Reset.	2
10		VccRx	+3.3V Receiver Power Supply.	
11		SCL	2-Wire Serial Interface Clock.	2
12		SDA	2-Wire Serial Interface Data.	2
13		GND	Module Ground.	1
14	CML-O	Rx3+	Receiver Non-Inverted Data Output.	
15	CML-O	Rx3-	Receiver Inverted Data Output.	
16		GND	Module Ground.	1
17	CML-O	Rx1+	Receiver Non-Inverted Data Output.	
18	CML-O	Rx1-	Receiver Inverted Data Output.	
19		GND	Module Ground.	1
20		GND	Module Ground.	1
21	CML-O	Rx2-	Receiver Non-Inverted Data Output.	
22	CML-O	Rx2+	Receiver Inverted Data Output.	
23		GND	Module Ground.	1
24	CML-O	Rx4-	Receiver Inverted Data Output.	
25	CML-O	Rx4+	Receiver Non-Inverted Data Output.	
26		GND	Module Ground.	1
27		ModPrsL	Module Present.	
28		IntL/RxLOSL	Interrupt. Optionally configurable as RxLOSL via the management interface (SFF-8636).	2
29		VccTx	+3.3V Transmitter Power Supply.	
30		Vcc1	+3.3V Power Supply.	
31		LPMode/TxDis	Low Power Mode. Optionally configurable as TxDis via the management interface (SFF-8636).	2
32		GND	Module Ground.	1
33	CML-I	Tx3+	Transmitter Non-Inverted Data Input.	

34	CML-I	Tx3-	Transmitter Inverted Data Input.	
35		GND	Module Ground.	1
36	CML-I	Tx1+	Transmitter Non-Inverted Data Input.	
37	CML-I	Tx1-	Transmitter Inverted Data Input.	
38		GND	Module Ground.	1


Notes:

1. GND is the symbol for signal and supply (power) common for the module. All are common within the module, and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal common ground plane.
2. VccRx, Vcc1, and VccTx are applied concurrently and may be internally connected within the module in any combination. Vcc contacts in SFF-8662 and SFF-8672 each have a steady state current rating of 1A.


Module Pad Layout

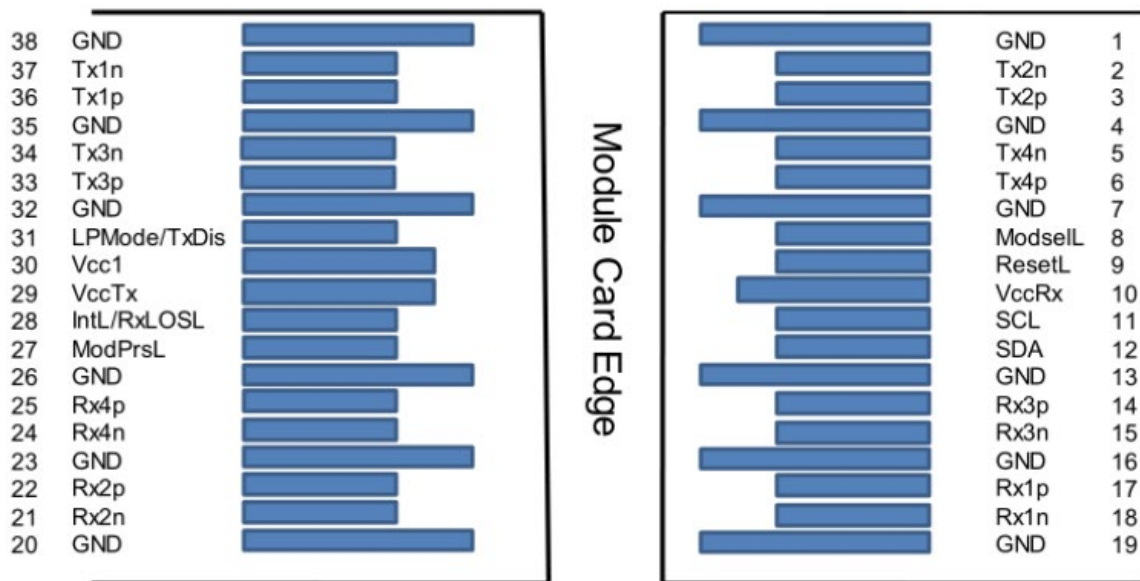

Block Diagram of Transceiver

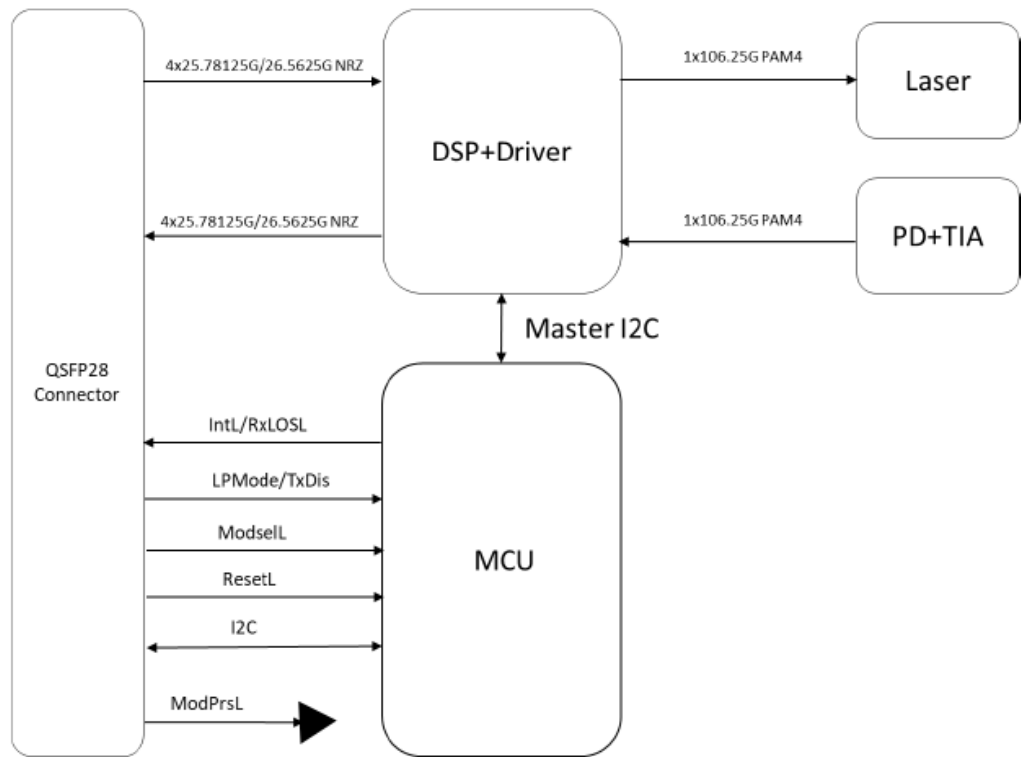

Mechanical Specifications

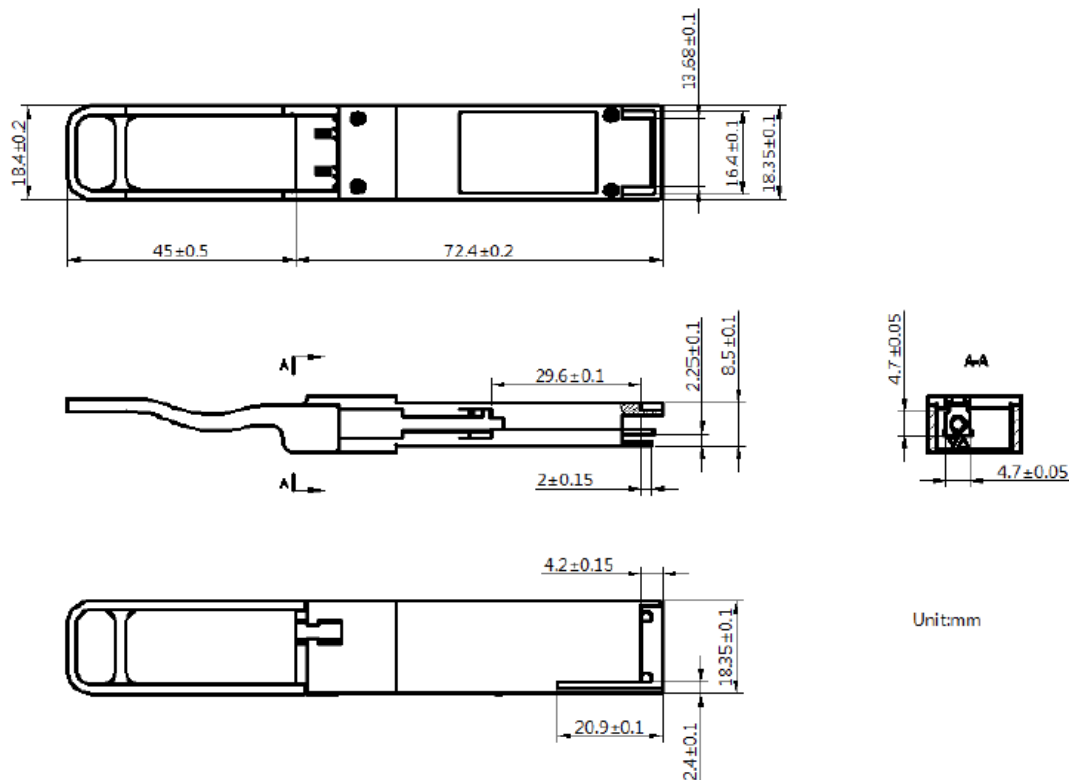

About Skylane Optics

Skylane is a leading provider of transceivers for optical communication.

We offer an extensive portfolio for the enterprise, access, datacenter and metropolitan fiber optical market as well as for smart home applications and home networks.

We cover the European, South American and North American market with a strong partner network and have offices in Belgium, Brazil, Sweden and USA.

Our offerings are characterized by high quality and performance. In combination with our strong technical support, we enable our customers to build cost optimized network solutions.

We offer an extensive range of high-quality products including transceivers (Optical and copper), Active Optical Cable (AOC), Direct Attach Cable (DAC), Mux/Demux, Coding Box.

