



Q2C27010C00FC72

Juniper Networks® JNP-QSFP-100G-LR-CW27 Compatible 100GBase-CWDM QSFP28 Transceiver Single Lambda (SMF, 1270nm, 10km w/FEC, LC, DOM)

Product Description

This Juniper Networks® JNP-QSFP-100G-LR-CW27 compatible QSFP28 transceiver provides 100GBase-CWDM throughput up to 10km over single-mode fiber (SMF) using a wavelength of 1270nm via an LC connector. It is guaranteed to be 100% compatible with the equivalent Juniper Networks® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Skylane's transceivers are RoHS compliant and lead-free.

Features:

- Supports 100Gbps
- Single 3.3V Power Supply
- 100G Lambda MSA 100G-LR Specification Compliant
- Up to 10km over SMF with FEC
- QSFP28 MSA Compliant
- Power Dissipation < 4.5W
- 4x25G Electrical Interface
- SFF-8636 Rev 2.10a Compliant
- Operating Case Temperature: 0C to 70C
- LC Duplex Connector
- I2C Interface with Integrated Digital Diagnostic Monitoring
- RoHS compliant



Applications:

- 100GBase Ethernet over CWDM
- Access, Metro and Enterprise

For your product safety, please read the following information carefully before any manipulation of the transceiver:



ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

CWDM Available Wavelengths

Wavelengths	Min.	Typ.	Max.
27	1264.5	1271	1277.5
29	1284.5	1291	1297.5
31	1304.5	1311	1317.5
33	1324.5	1331	1337.5

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit
Maximum Supply Voltage	Vcc	-0.5		4.0	V
Storage Temperature	TS	-40		+85	°C
Operating Case Temperature	Tc	0		70	°C
Operating Relative Humidity	RH	5		85	%
Damage threshold	Rxdmg	5.5			dBm

Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage	Vcc	3.135	3.3	3.465	V	
Power Dissipation	PD			4.5	W	
Transmitter						
Differential data input swing per lane		900			mVp-p	
Differential input impedance	Zin	90	100	110	ohm	
DC common mode voltage (Vcm)		-350		2850	mV	
Receiver						
Differential output amplitude				900	mVp-p	
Differential output impedance	Zout	90	100	110	ohm	
Output Rise/Fall Time	tr/tf	12			ps	20%~80%
AC Common Mode Output Voltage				7.5	mV	
Eye width		0.57			UI	
Eye height differential		228			mV	@TP4, 1E-15
DC common mode voltage (Vcm)		-350		2850	mV	1

Notes:

1. Vcm is generated by the host. Specification includes effects of ground offset voltage.

Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Transmitter						
Signaling speed			53.125		Gbaud	
Modulation format		PAM4				
Optical center wavelength	λ	$\lambda_c - 6.5$	λ_c	$\lambda_c + 6.5$	nm	
Side-mode suppression ratio	SMSR	30			dB	
Extinction ratio	ER	3.5			dB	
Transmit OMA	TxOMA	0.7		4.7	dBm	
Transmit average	TxAVG	-1.4		4.5	dBm	1
Launch power in OMA _{outer} minus TDECQ		-0.7			dBm	2
Launch power in OMA _{outer} minus TDECQ		-0.6			dBm	3
Transmitter and dispersion eye closure	TDECQ			3.4	dB	
Optical return loss tolerance				15.6	dB	4
Receiver						
Signaling speed			53.125		Gbaud	
Damage threshold		5.5			dBm	
Receive power (OMA _{outer})	RxOMA			4.7	dBm	
Average receive power	RxAVG	-7.7		4.5	dBm	
Receiver sensitivity (OMA _{outer})	SenOMA			Max(-6.1, SECQ-7.5)	dBm	5
Receiver reflectance				-26	dB	
LOS assert	LOSA	-15			dBm	
LOS De-assert	LOSD			-12	dBm	
LOS hysteresis		0.5			dB	

Notes:

1. Average launch power (min) is informative and not the principal indicator of signal strength. A transmitter with launch power below this value cannot be compliant; however, a value above this does not ensure compliance.
2. For $ER \geq 4.5\text{dB}$
3. For $ER < 4.5\text{dB}$
4. Transmitter reflectance is defined looking into the transmitter.
5. Sensitivity is specified at 2.4×10^{-4} BER.

Pin Descriptions

Pin	Symbol	Name/Descriptions	Ref.
1	GND	Transmitter Ground (Common with Receiver Ground)	1
2	Tx2-	Transmitter Inverted Data Input	
3	Tx2+	Transmitter Non-Inverted Data output	
4	GND	Transmitter Ground (Common with Receiver Ground)	1
5	Tx4-	Transmitter Inverted Data Input	
6	Tx4+	Transmitter Non-Inverted Data output	
7	GND	Transmitter Ground (Common with Receiver Ground)	1
8	ModSelL	Module Select	2
9	ResetL	Module Reset	2
10	VccRx	3.3V Power Supply Receiver	
11	SCL	2-Wire serial Interface Clock	2
12	SDA	2-Wire serial Interface Data	2
13	GND	Transmitter Ground (Common with Receiver Ground)	1
14	Rx3+	Receiver Non-Inverted Data Output	
15	Rx3-	Receiver Inverted Data Output	
16	GND	Transmitter Ground (Common with Receiver Ground)	1
17	Rx1+	Receiver Non-Inverted Data Output	
18	Rx1-	Receiver Inverted Data Output	
19	GND	Transmitter Ground (Common with Receiver Ground)	1
20	GND	Transmitter Ground (Common with Receiver Ground)	1
21	Rx2-	Receiver Inverted Data Output	
22	Rx2+	Receiver Non-Inverted Data Output	
23	GND	Transmitter Ground (Common with Receiver Ground)	1
24	Rx4-	Receiver Inverted Data Output	1
25	Rx4+	Receiver Non-Inverted Data Output	
26	GND	Transmitter Ground (Common with Receiver Ground)	1
27	ModPrsl	Module Present	
28	IntL	Interrupt	2
29	VccTx	3.3V power supply transmitter	
30	Vcc1	3.3V power supply	
31	LPMODE	Low Power Mode	2
32	GND	Transmitter Ground (Common with Receiver Ground)	1
33	Tx3+	Transmitter Non-Inverted Data Input	
34	Tx3-	Transmitter Inverted Data Output	

35	GND	Transmitter Ground (Common with Receiver Ground)	1
36	Tx1+	Transmitter Non-Inverted Data Input	
37	Tx1-	Transmitter Inverted Data Output	
38	GND	Transmitter Ground (Common with Receiver Ground)	1


Notes:

1. The module signal grounds are isolated from the module case.
2. This is an open collector/drain output that on the host board requires a 4.7K Ω to 10K Ω pull-up resistor to VccHost.

Electrical Pin-out Details



Mechanical Specifications

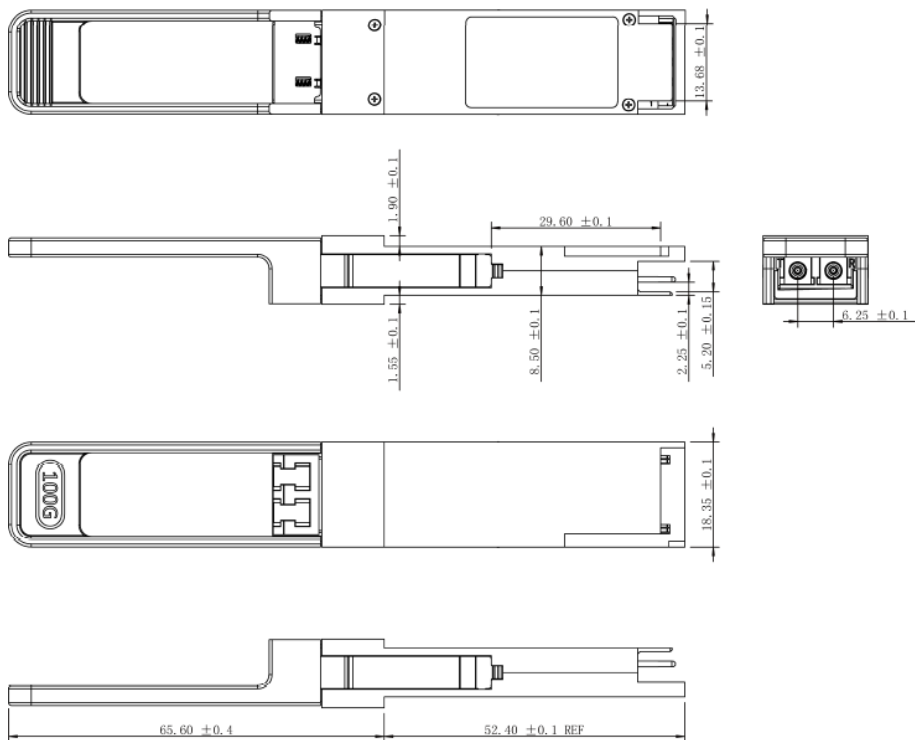

About Skylane Optics

Skylane is a leading provider of transceivers for optical communication.

We offer an extensive portfolio for the enterprise, access, datacenter and metropolitan fiber optical market as well as for smart home applications and home networks.

We cover the European, South American and North American market with a strong partner network and have offices in Belgium, Brazil, Sweden and USA.

Our offerings are characterized by high quality and performance. In combination with our strong technical support, we enable our customers to build cost optimized network solutions.

We offer an extensive range of high-quality products including transceivers (Optical and copper), Active Optical Cable (AOC), Direct Attach Cable (DAC), Mux/Demux, Coding Box.

