



## 34060590-SKY

Huawei® 34060590 Compatible 3GBase-LX SFP Transceiver (SMF, 1310nm, 10km, LC, DOM)

### Product Description

This Huawei® 34060590 compatible SFP transceiver provides 3GBase-LX throughput up to 20km over single-mode fiber (SMF) using a wavelength of 1310nm via an LC connector. It is guaranteed to be 100% compatible with the equivalent Huawei® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Skylane's transceivers are RoHS compliant and lead-free.

### Features:

- INF-8074 and SFF-8472 Compliance
- Duplex LC Connector
- Commercial Temperature 0 to 70 Celsius
- Single-mode Fiber
- Hot Pluggable
- Excellent ESD Protection
- Metal with Lower EMI
- RoHS Compliant and Lead Free



### Applications:

- 4.25GBase Ethernet
- Access and Enterprise

---

*For your product safety, please read the following information carefully before any manipulation of the transceiver:*



#### **ESD**

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



#### **LASER SAFETY**

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

*The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.*

---

## Absolute Maximum Ratings

| Parameter              | Symbol | Min. | Max. | Unit |
|------------------------|--------|------|------|------|
| Maximum Supply Voltage | Vcc    | -0.5 | 4.0  | V    |
| Storage Temperature    | TS     | -40  | 85   | °C   |
| Operating Humidity     | RH     | 5    | 95   | %    |

## Recommended Operating Conditions

| Parameter                    | Symbol | Min. | Typ.  | Max. | Unit |
|------------------------------|--------|------|-------|------|------|
| Power Supply Voltage         | Vcc    | 3.13 | 3.30  | 3.47 | V    |
| Power Supply Current         | Icc    |      |       | 250  | mA   |
| Case Operating Temperature   | Tc     | 0    |       | 70   | °C   |
| Data Rate (Gigabit Ethernet) |        |      | 1.25  |      | Gbps |
| Data Rate (Fibre Channel)    |        |      | 1.063 |      | Gbps |
| 9/125µm G.652 SMF            | Lmax   |      |       | 10   | km   |

## Electrical Characteristics (TOP=25°C, Vcc=3.3V)

| Parameter                      | Symbol   | Min.    | Typ. | Max.    | Unit | Notes |
|--------------------------------|----------|---------|------|---------|------|-------|
| Transmitter                    |          |         |      |         |      |       |
| Input differential impedance   | Rin      |         | 100  |         | Ω    | 1     |
| Single ended data input swing  | Vin, pp  | 250     |      | 1200    | mV   |       |
| TX Disable-High                |          | Vcc-1.3 |      | Vcc     | V    |       |
| TX Disable-Low                 |          | Vee     |      | Vee+0.8 | V    |       |
| TX Fault-High                  |          | Vcc-0.5 |      | Vcc     | V    |       |
| TX Fault-Low                   |          | Vee     |      | Vee+0.5 | V    |       |
| Receiver                       |          |         |      |         |      |       |
| Single ended data output swing | Vout, pp | 300     | 400  | 800     | mV   | 2     |
| Data output rise time          | tr       |         |      | 175     | ps   | 3     |
| Data output fall time          | tf       |         |      | 175     | ps   | 3     |
| LOS-High                       |          | Vcc-0.5 |      | Vcc     | V    |       |
| LOS-Low                        |          | Vee     |      | Vee+0.5 | V    |       |

### Notes:

1. AC coupled.
2. Into 100 ohm differential termination.
3. 20% - 80%

## Optical Characteristics

| Parameter                 | Symbol            | Min. | Typ. | Max. | Unit | Notes |
|---------------------------|-------------------|------|------|------|------|-------|
| <b>Transmitter</b>        |                   |      |      |      |      |       |
| Output Opt. Power         | PO                | -9.5 |      | -3   | dBm  | 1     |
| Optical Wavelength        | $\lambda$         | 1275 | 1310 | 1350 | nm   |       |
| Spectral Width            | $\sigma$          |      |      | 3    | nm   |       |
| Optical Rise/Fall Time    | tr/tf             |      |      | 260  | ps   | 2     |
| Total Jitter              | TJ                |      |      | 200  | ps   |       |
| Optical Extinction Ratio  | ER                | 9    |      |      | dB   |       |
| <b>Receiver</b>           |                   |      |      |      |      |       |
| RX Sensitivity @1.25 Gbs  | RSNS              |      |      | -21  | dBm  | 3,4   |
| Maximum Received Power    | RX <sub>MAX</sub> | -3   |      |      | dBm  |       |
| Optical Center Wavelength | $\lambda_C$       | 1270 |      | 1600 | nm   |       |
| LOS De-Assert             | LOSD              |      |      | -22  | dBm  |       |
| LOS Assert                | LOSA              | -42  |      |      | dBm  |       |
| LOS Hysteresis            |                   | 0.5  |      | 5    | dB   |       |

### Notes:


1. Class 1 Laser Safety.
2. Unfiltered, 20%-80%. Complies with GE and 1x FC eye masks when filtered.
3. Measured with conformance signals defined in FC-PI-2 Rev. 10.0 specifications.
4. Measured with PRBS 2<sup>7</sup>-1 at 10<sup>-10</sup> BER.

## Pin Descriptions

| Pin | Symbol      | Name/Descriptions                                              | Ref. |
|-----|-------------|----------------------------------------------------------------|------|
| 1   | VeeT        | Transmitter Ground (Common with Receiver Ground)               | 1    |
| 2   | TX Fault    | Transmitter Fault.                                             |      |
| 3   | TX Disable  | Transmitter Disable. Laser output disabled on high or open.    | 2    |
| 4   | MOD_DEF (2) | Module Definition 2. Data line for Serial ID.                  | 3    |
| 5   | MOD_DEF (1) | Module Definition 1. Clock line for Serial ID.                 | 3    |
| 6   | MOD_DEF (0) | Module Definition 0. Grounded within the module.               | 3    |
| 7   | Rate Select | No connection required.                                        |      |
| 8   | LOS         | Loss of Signal indication. Logic 0 indicates normal operation. | 4    |
| 9   | VeeR        | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 10  | VeeR        | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 11  | VeeR        | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 12  | RD-         | Receiver Inverted DATA out. AC Coupled.                        |      |
| 13  | RD+         | Receiver Non-inverted DATA out. AC Coupled.                    |      |
| 14  | VeeR        | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 15  | VccR        | Receiver Power Supply.                                         |      |
| 16  | VccT        | Transmitter Power Supply.                                      |      |
| 17  | VeeT        | Transmitter Ground (Common with Receiver Ground)               | 1    |
| 18  | TD+         | Transmitter Non-Inverted DATA in. AC Coupled.                  |      |
| 19  | TD-         | Transmitter Inverted DATA in. AC Coupled.                      |      |
| 20  | VeeT        | Transmitter Ground (Common with Receiver Ground)               | 1    |


## Notes:

1. Circuit ground is internally isolated from chassis ground.
2. Laser output disabled on TX Disable >2.0V or open, enabled on TX Disable <0.8V.
3. Should be pulled up with 4.7k-10kohms on host board to a voltage between 2.0V and 3.6V. MOD\_DEF (0) pulls line low to indicate module is plugged in.
4. LOS is open collector output. Should be pulled up with 4.7k-10kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

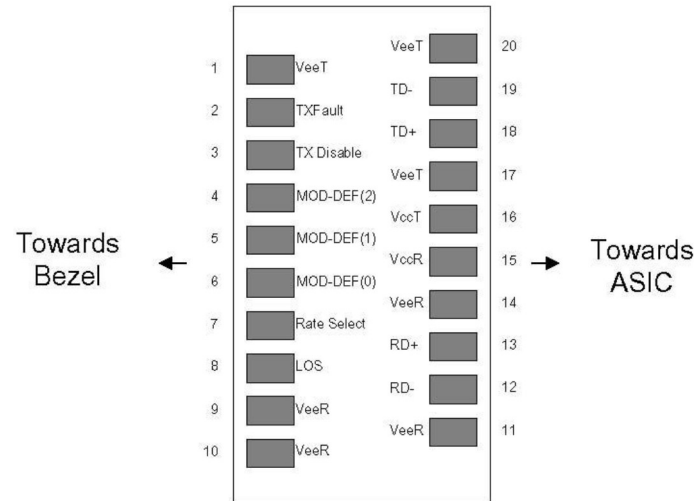


Pin-out of connector Block on Host board

### Recommend Circuit Schematic

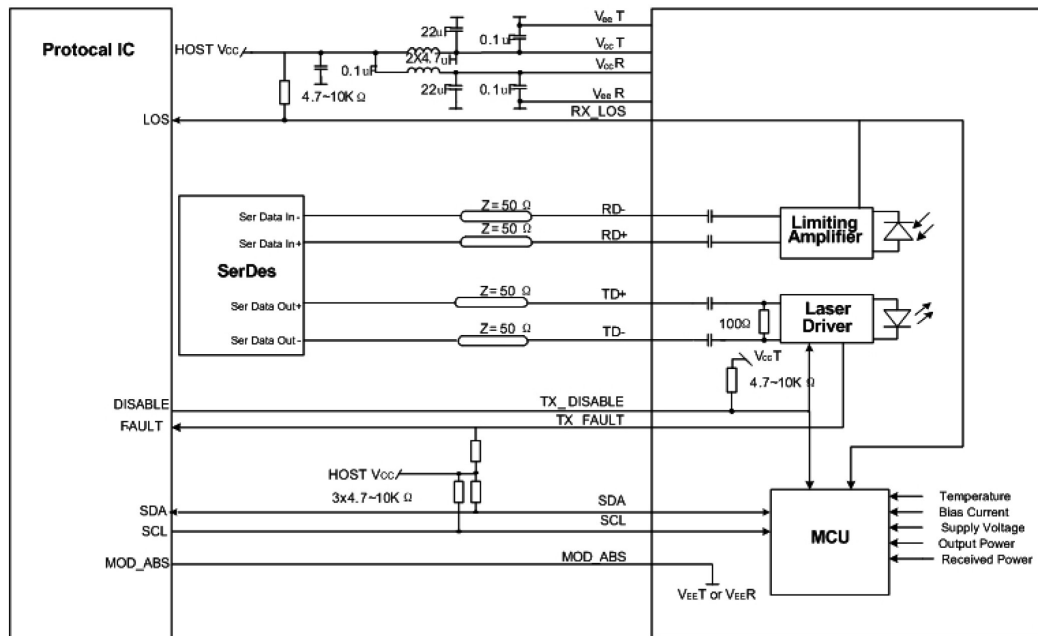


**Mechanical Specifications**

Small Form Factor Pluggable (SFP) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).

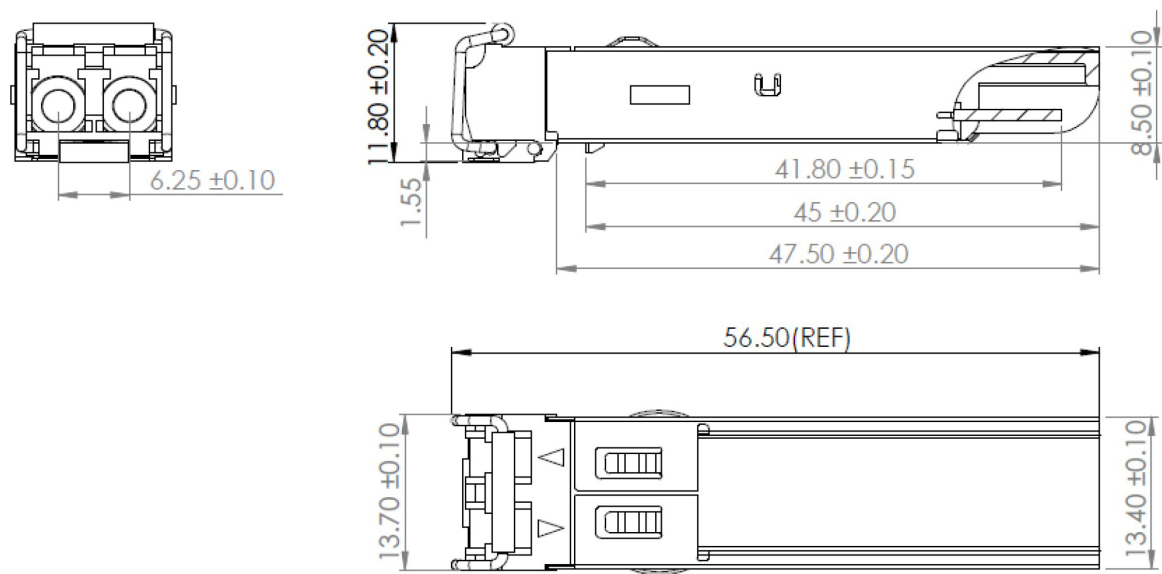

**EEPROM Information**

EEPROM memory map specific data field description is as below:

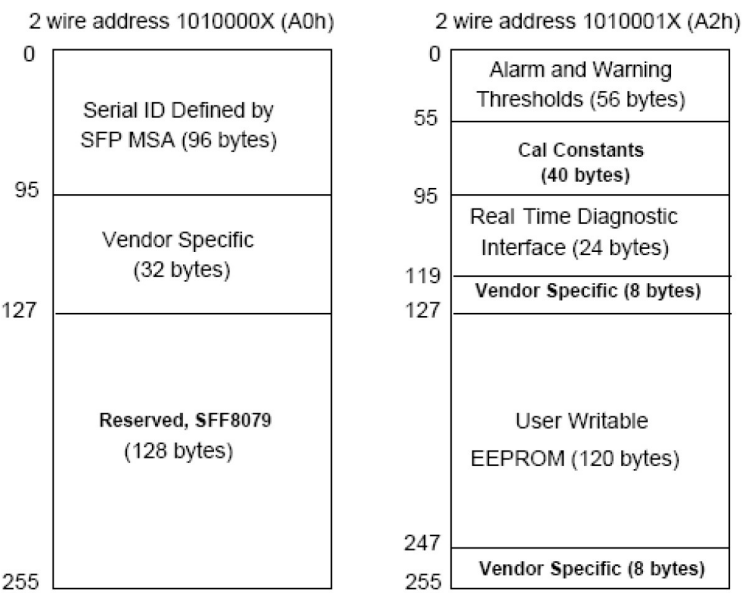

# About Skylane Optics

Skylane is a leading provider of transceivers for optical communication.

We offer an extensive portfolio for the enterprise, access, datacenter and metropolitan fiber optical market as well as for smart home applications and home networks.

We cover the European, South American and North American market with a strong partner network and have offices in Belgium, Brazil, Sweden and USA.

Our offerings are characterized by high quality and performance. In combination with our strong technical support, we enable our customers to build cost optimized network solutions.

We offer an extensive range of high-quality products including transceivers (Optical and copper), Active Optical Cable (AOC), Direct Attach Cable (DAC), Mux/Demux, Coding Box.

