



QSFP-SFP-10G-PDAC7M-SKY

MSA Compliant 10GBase-CU QSFP+ to SFP+ Direct Attach Cable (Passive Twinax, 7m)

Product Description

This is an MSA compliant 10GBase-CU QSFP+ to SFP+ direct attach cable that operates over passive copper with a maximum reach of 7.0m (23.0ft). It has been programmed, uniquely serialized, and data-traffic and application tested to ensure it is 100% compliant and functional. This direct attach cable is built to comply with MSA (Multi-Source Agreement) standards. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Skylane's transceivers are RoHS compliant and lead-free.

Features:

- MSA QSFP+ Compliant
- AC Coupled Inputs and Outputs
- MSA SFP+ Compliant
- Support for 2.5Gbps, 5Gbps Data Rates
- Single 3.3V Power Supply
- Independent Duplex Channels Operating at 10Gbps
- Operating Temperature: 0 to 70 Celsius
- All-Metal Housing for Superior EMI Performance
- RoHS Compliant and Lead-Free



Applications:

- 10GBase Ethernet

For your product safety, please read the following information carefully before any manipulation of the transceiver:



ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

General Specifications

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Operating Case Temperature	T _c	0		70	°C	1
Storage Ambient Temperature	T _{stg}	-40		85	°C	2
Input Voltage	V _{cc}	3.14	3.3	3.46	V	
Bit Error Rate	BER			10 ⁻¹²		

Notes:

1. Case temperature.
2. Ambient temperature.

Cable Specifications

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Wire Gauge				24	AWG	
Cable Impedance	Z	90	100	110	Ω	
Product Weight	G _d		113		g/PCS	1
Cable Weight	G _c		50		g/M	2
SFP10 End Dust Cap Weight	G _s		0.80		g/PCS	
QSFP10 End Dust Cap Weight	G _q		1.40		g/PCS	

Notes:

1. The weight of cable including SFP10 end and QSFP10 end.
2. The weight of unit length cable.

Cable Dimension and Nominal Length

Standard Wire Gauge AWG	Cable Diameter OD (mm)	Minimum Bending Radius R (mm)	Module Nominal Length L1 (cm)	Tolerance Range ± (cm)
24	6.0	28	4<L1	6

Pin Descriptions (QSFP+ End)



Pin	Symbol	Name/Description	Notes
1	GND	Module Ground.	5
2	Tx2-	Transmitter Inverted Data Input, LAN2.	
3	Tx2+	Transmitter Non-Inverted Data Input, LAN2.	
4	GND	Module Ground.	5
5	Tx4-	Transmitter Inverted Data Input, LAN4.	
6	Tx4+	Transmitter Non-Inverted Data Input, LAN4.	
7	GND	Module Ground.	5
8	ModSelL	Module Select Pin. The module responds to 2-wire serial communication when low level.	1
9	ResetL	Module Reset.	2
10	VccRx	+3.3V Power Supply Receiver.	
11	SCL	2-Wire Serial Interface Clock.	
12	SDA	2-Wire Serial Interface Data.	
13	GND	Module Ground.	5
14	Rx3+	Receiver Non-Inverted Data Output, LAN3.	
15	Rx3-	Receiver Inverted Data Output, LAN3.	
16	GND	Module Ground.	5
17	Rx1+	Receiver Non-Inverted Data Output, LAN1.	
18	Rx1-	Receiver Inverted Data Output, LAN1.	
19	GND	Module Ground.	5
20	GND	Module Ground.	5
21	Rx2-	Receiver Inverted Data Output, LAN2.	
22	Rx2+	Receiver Non-Inverted Data Output, LAN2.	
23	GND	Module Ground.	5
24	Rx4-	Receiver Inverted Data Output, LAN4.	
25	Rx4+	Receiver Non-Inverted Data Output, LAN4.	
26	GND	Module Ground.	5
27	ModPrsL	Module Present. The module is inserted into the indicate pin and grounded in the module.	3
28	IntL	Interrupt.	4
29	VccTx	+3.3V Power Supply Transmitter.	
30	Vcc1	+3.3V Power Supply.	
31	LPMode	Low-Power Mode.	5
32	GND	Module Ground.	5
33	Tx3+	Transmitter Non-Inverted Data Input, LAN3.	
34	Tx3-	Transmitter Inverted Data Input, LAN3.	
35	GND	Module Ground.	5
36	Tx1+	Transmitter Non-Inverted Data Input, LAN1	

37	Tx1-	Transmitter Inverted Data Input, LAN1	
38	GND	Module Ground.	5

Notes:

1. ModSell is the input pin. The module responds to 2-wire serial communication commands when it is held low by the host. ModSell allows multiple QSFP modules to be used on a single 2-wire interface bus. If ModSell is high, the module will not respond to any 2-wire interface communication from the host. ModSell has internal pull-up resistors in the module.
2. The module restart pin, when the low level on the ResetL pin lasts longer than the minimum pulse length, resets the module and restores all user modules to their default state. When performing reset device, the host should ignore all status bits. Until the module reset interrupt is completed, please note that during hot plugging, the module will issue this information to complete the reset interrupt without resetting.
3. This pin is active high, indicating that the module is running under a low-power module. The signal has no effect on the functionality of this product.
4. IntL is the output pin, which is the open collector output and must be pulled up to Vcc with a 4.7kΩ to 10kΩ resistor on the motherboard. When it is low, it indicates that the module may malfunction. The host uses a 2-wire serial interface to identify the interrupt source.
5. The circuit ground is internally isolated from the chassis ground.

Electrical Pad Layout (QSFP+ End)

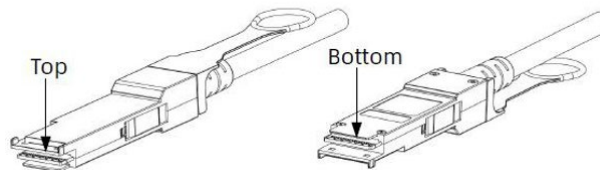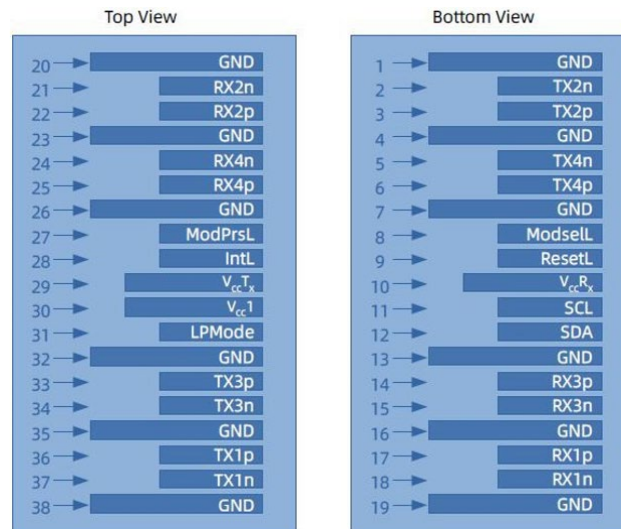



Pin Descriptions (SFP+ End)

Pin	Symbol	Name/Description	Notes
1	VeeT	Transmitter Ground (Common with Receiver Ground).	1
2	Tx_Fault	Transmitter Fault.	
3	Tx_Disable	Transmitter Disable. Laser output is disabled on “high” or “open.”	
4	SDA	Data Line for Serial ID.	2
5	SCL	Clock Line for Serial ID.	2
6	MOD_ABS	Module Absent. Grounded within the module.	2
7	RS0	No Connection Required.	
8	LOS	Loss of Signal Indication. “Logic 0” indicates normal operation.	
9	RS1	No Connection Required.	
10	VeeR	Receiver Ground (Common with Transmitter Ground).	1
11	VeeR	Receiver Ground (Common with Transmitter Ground).	1
12	RD-	Receiver Inverted Data Out. AC Coupled.	
13	RD+	Receiver Non-Inverted Data Out. AC Coupled.	
14	VeeR	Receiver Ground (Common with Transmitter Ground).	1
15	VccR	Receiver Power Supply.	
16	VccT	Transmitter Power Supply.	
17	VeeT	Transmitter Ground (Common with Receiver Ground).	1
18	TD+	Transmitter Non-Inverted Data In. AC Coupled.	
19	TD-	Transmitter Inverted Data In. AC Coupled.	
20	VeeT	Transmitter Ground (Common with Receiver Ground).	1


Notes:

1. The circuit ground is isolated from the chassis ground.
2. Should be pulled up with 4.7k Ω to 10k Ω on the host board to a voltage between 2V and 3.6V.

Electrical Pad Layout (SFP+ End)

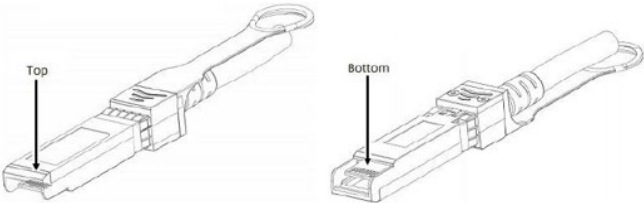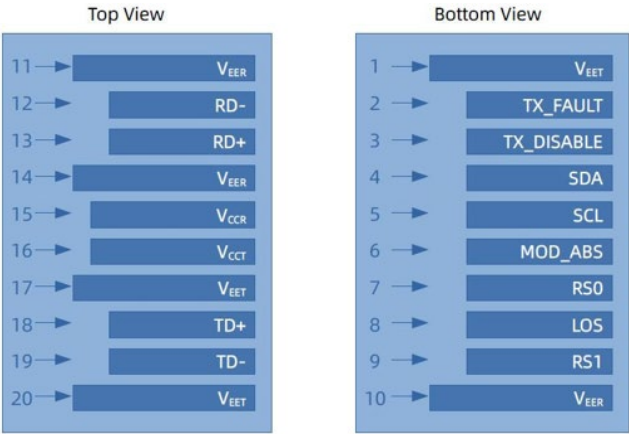

Mechanical Specifications

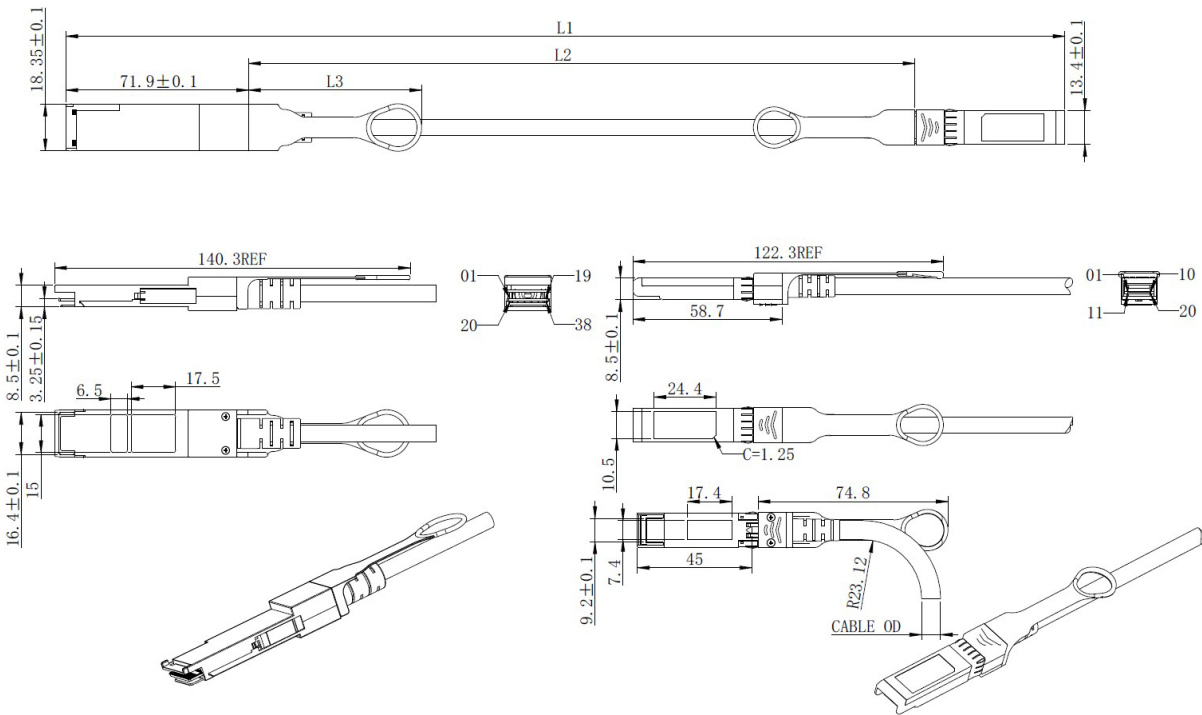

About Skylane Optics

Skylane is a leading provider of transceivers for optical communication.

We offer an extensive portfolio for the enterprise, access, datacenter and metropolitan fiber optical market as well as for smart home applications and home networks.

We cover the European, South American and North American market with a strong partner network and have offices in Belgium, Brazil, Sweden and USA.

Our offerings are characterized by high quality and performance. In combination with our strong technical support, we enable our customers to build cost optimized network solutions.

We offer an extensive range of high-quality products including transceivers (Optical and copper), Active Optical Cable (AOC), Direct Attach Cable (DAC), Mux/Demux, Coding Box.

