



## 3FE27626AA-SKY

Alcatel-Lucent Nokia® 3FE27626AA Compatible 100Base-LR SFP Transceiver (SMF, 1310nm, 40km, LC, DOM)

### Product Description

This Alcatel-Lucent Nokia® 3FE27626AA compatible SFP transceiver provides 100Base-LR throughput up to 40km over single-mode fiber (SMF) using a wavelength of 1310nm via an LC connector. It is guaranteed to be 100% compatible with the equivalent Alcatel-Lucent Nokia® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Skylane's transceivers are RoHS compliant and lead-free.

### Features:

- INF-8074 and SFF-8472 Compliance
- Duplex LC Connector
- Commercial Temperature 0 to 70 Celsius
- Single-mode Fiber
- Hot Pluggable
- Excellent ESD Protection
- Metal with Lower EMI
- RoHS Compliant and Lead Free



### Applications:

- 100Base Ethernet
- Access and Enterprise

---

*For your product safety, please read the following information carefully before any manipulation of the transceiver:*



#### **ESD**

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 /JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



#### **LASER SAFETY**

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

*The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.*

---

## Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883 Method 3015.
- ESD to the Duplex LC Receptacle: compatible with IEC 61000-4-2.
- Immunity compatible with IEC 61000-4-3.
- EMI compatible with FCC Part 15 Class B EN55022 Class B (CISPR 22B) VCCI Class B.
- Laser Eye Safety compatible with FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1,2.
- RoHs compliant with 2002/95/EC 4.1&4.2 2005/747/EC.

## Absolute Maximum Ratings

| Parameter                  | Symbol | Min. | Typ. | Max. | Unit |
|----------------------------|--------|------|------|------|------|
| Maximum Supply Voltage     | Vcc    | -0.5 |      | 4.0  | V    |
| Storage Temperature        | Tstg   | -40  |      | 85   | °C   |
| Operating Humidity         | RH     | 5    |      | 85   | %    |
| Operating Case Temperature | Tc     | 0    |      | 70   | °C   |
| Data Rate                  |        |      | 155  |      | Mbps |

## Electrical Characteristics (Tc=25°C, Vcc=3.3V)

| Parameter                     | Symbol | Min. | Typ. | Max. | Unit  | Notes |
|-------------------------------|--------|------|------|------|-------|-------|
| Power Supply Voltage          | Vcc    | 3.14 | 3.3  | 3.46 | V     |       |
| Power Supply Current          | Icc    |      | 165  | 300  | mA    |       |
| Transmitter                   |        |      |      |      |       |       |
| Input Differential Impedance  | ZIN    | 85   | 100  | 120  | Ω     | 1     |
| LVPECL Inputs (Differential)  | VIN    | 500  |      | 2400 | mVp-p | 2     |
| Receiver                      |        |      |      |      |       |       |
| Output Differential Impedance | ZOUT   | 85   | 100  | 120  | Ω     |       |
| LVPECL Outputs (Differential) | VOUT   | 600  | 800  | 1600 | mVp-p | 2     |

## Notes:

1. RIN>100kΩ @ DC.
2. AC coupled.

## Optical Characteristics

| Parameter                 | Symbol | Min.                  | Typ. | Max. | Unit | Notes |
|---------------------------|--------|-----------------------|------|------|------|-------|
| Transmitter               |        |                       |      |      |      |       |
| Average Output Power      | PO     | -5                    |      | 0    | dBm  | 1     |
| Optical Wavelength        | λ      | 1275                  | 1310 | 1350 | nm   |       |
| Spectral Width (RMS)      | Δλ     |                       |      | 3    | nm   |       |
| Optical Rise/Fall Time    | Tr/Tf  |                       | 250  | 500  | ps   | 2     |
| Extinction Ratio          | ER     | 9                     |      |      | dB   | 3     |
| Output Optical Eye        |        | IUT-T G.957 Compliant |      |      |      |       |
| Receiver                  |        |                       |      |      |      |       |
| Receiver Sensitivity      | Pmin   |                       |      | -32  | dBm  | 4     |
| Receiver Overload         | Pmax   | 0                     |      |      | dBm  |       |
| Optical Center Wavelength | λC     | 1260                  |      | 1600 | nm   |       |
| LOS De-Assert             | LOSD   |                       |      | -32  | dBm  |       |
| LOS Assert                | LOSA   | -45                   |      |      | dBm  |       |
| LOS Hysteresis            |        | 0.5                   |      |      | dB   |       |

### Notes:

1. Average.
2. 20-80%.
3. Filtered, measured with a PRBS  $2^{23}-1$  test pattern @155Mbps.
4. Minimum average optical power is measured at BER less than  $1E^{-12}$  with  $2^{23}-1$  PRBS and ER=9dB.

## Pin Descriptions

| Pin | Symbol      | Name/Description                                                 | Notes |
|-----|-------------|------------------------------------------------------------------|-------|
| 1   | VeeT        | Transmitter Ground (Common with Receiver Ground).                | 1     |
| 2   | Tx_Fault    | Transmitter Fault.                                               |       |
| 3   | Tx_Disable  | Transmitter Disable. Laser output disabled on "high" or "open."  | 2     |
| 4   | MOD_DEF(2)  | Module Definition 2. Data Line for Serial ID.                    | 3     |
| 5   | MOD_DEF(1)  | Module Definition 1. Clock Line for Serial ID.                   | 3     |
| 6   | MOD_DEF(0)  | Module Definition 0. Grounded within the module.                 | 3     |
| 7   | Rate Select | No Connection Required.                                          |       |
| 8   | LOS         | Loss of Signal Indication. "Logic 0" indicates normal operation. | 4     |
| 9   | VeeR        | Receiver Ground (Common with Transmitter Ground).                | 1     |
| 10  | VeeR        | Receiver Ground (Common with Transmitter Ground).                | 1     |
| 11  | VeeR        | Receiver Ground (Common with Transmitter Ground).                | 1     |
| 12  | RD-         | Receiver Inverted Data Out. AC Coupled.                          |       |
| 13  | RD+         | Receiver Non-Inverted Data Out. AC Coupled.                      |       |
| 14  | VeeR        | Receiver Ground (Common with Transmitter Ground).                | 1     |
| 15  | VccR        | Receiver Power Supply.                                           |       |
| 16  | VccT        | Transmitter Power Supply.                                        |       |
| 17  | VeeT        | Transmitter Ground (Common with Receiver Ground).                | 1     |
| 18  | TD+         | Transmitter Non-Inverted Data In. AC Coupled.                    |       |
| 19  | TD-         | Transmitter Inverted Data In. AC Coupled.                        |       |
| 20  | VeeT        | Transmitter Ground (Common with Receiver Ground).                | 1     |

## Notes:



1. The circuit ground is internally isolated from the chassis ground.
2. Laser output is disabled on Tx\_Disable>2.0V or open, enabled on Tx\_Disable<0.8V.
3. Should be pulled up with 4.7kΩ-10kΩ on the host board to a voltage between 2.0V and 3.6V. MOD\_DEF(1) pulls the line low to indicate that the module is plugged in.
4. LOS is an open collector output. Should be pulled up with 4.7kΩ-10kΩ on the host board to a voltage between 2.0V and 3.6V. "Logic 0" indicates normal operation. "Logic 1" indicates a loss of signal.



Top of Board




Bottom of Board

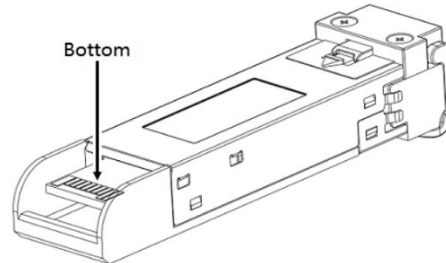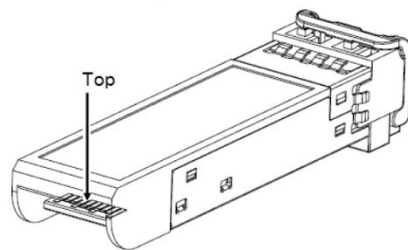


Pin-Out of Connector Block on the Host Board

## Recommended Circuit Schematic

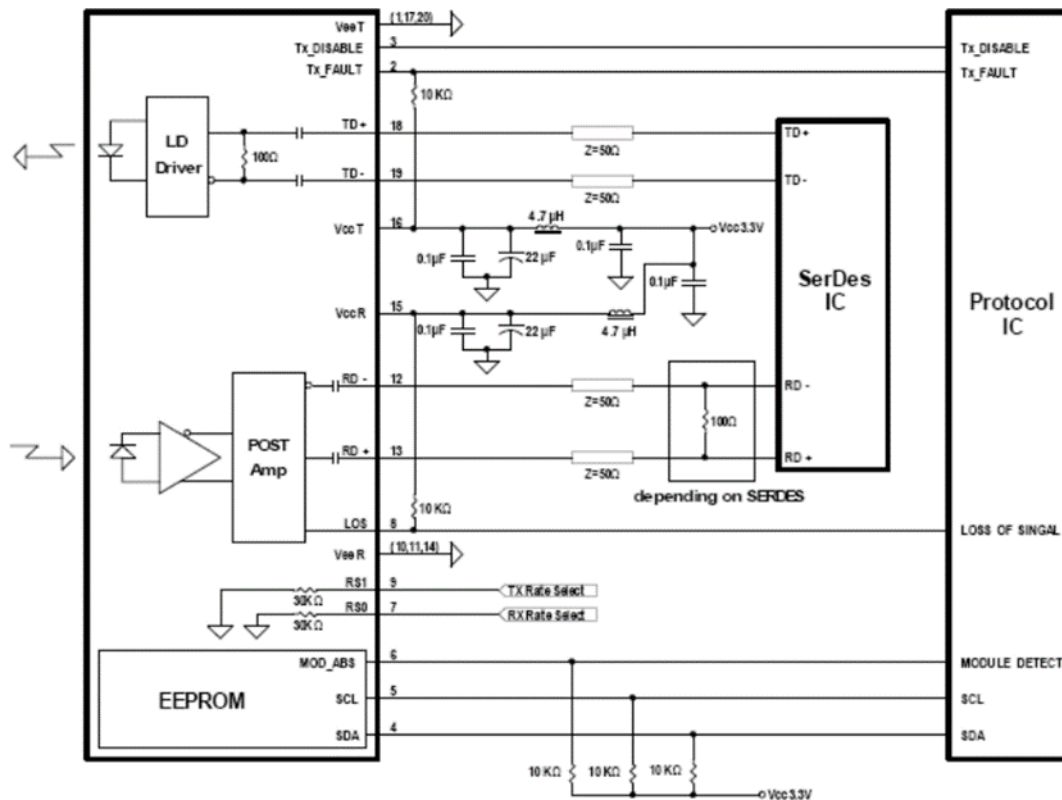


**Mechanical Specifications**

Small Form Factor Pluggable (SFP) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).

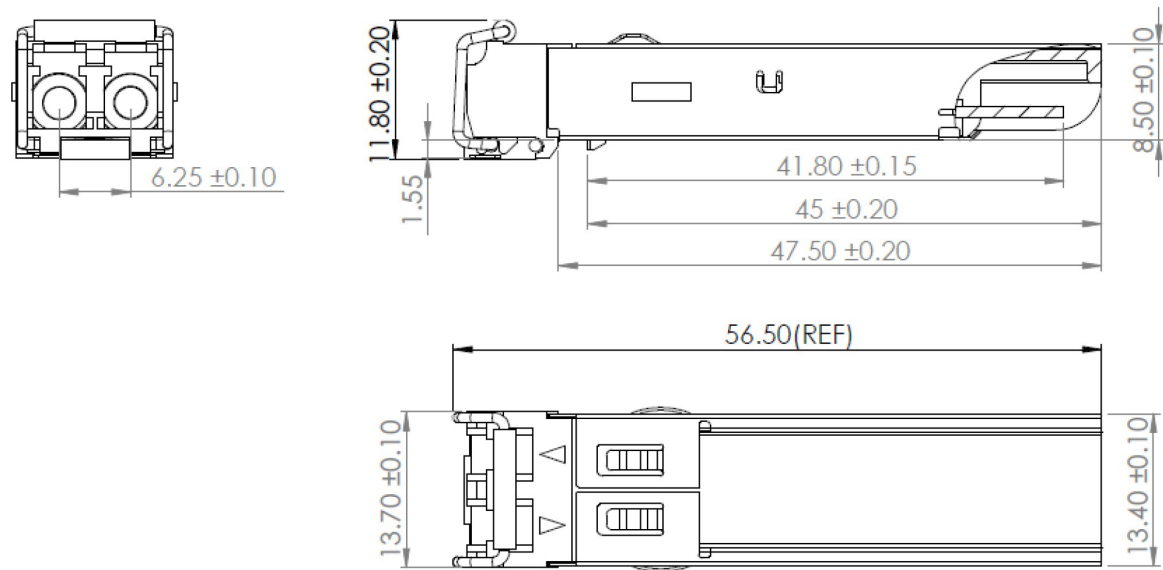

**EEPROM Information**

EEPROM memory map-specific data field description is as below:

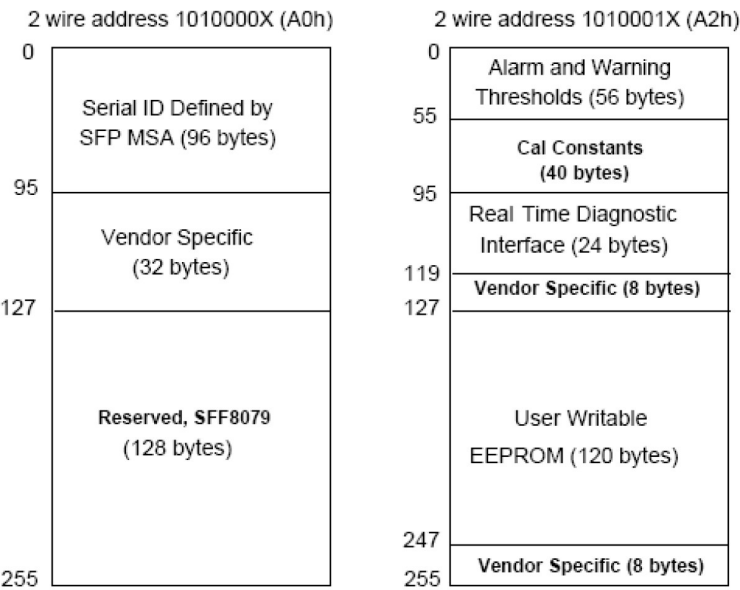

# About Skylane Optics

Skylane is a leading provider of transceivers for optical communication.

We offer an extensive portfolio for the enterprise, access, datacenter and metropolitan fiber optical market as well as for smart home applications and home networks.

We cover the European, South American and North American market with a strong partner network and have offices in Belgium, Brazil, Sweden and USA.

Our offerings are characterized by high quality and performance. In combination with our strong technical support, we enable our customers to build cost optimized network solutions.

We offer an extensive range of high-quality products including transceivers (Optical and copper), Active Optical Cable (AOC), Direct Attach Cable (DAC), Mux/Demux, Coding Box.

