



## DWDM-SFP10G-C-A5-SKY

Cisco® DWDM-SFP10G-C-A5 Compatible 10GBase-DWDM 50GHz SFP+ Transceiver (SMF, Auto-Tunable, 80km, LC, DOM, 0 to 70C)

### Product Description

This Cisco® DWDM-SFP10G-C compatible SFP+ transceiver provides 10GBase-DWDM throughput up to 80km over single-mode fiber (SMF) using a wavelength of 1530nm to 1565nm via an LC connector. It is guaranteed to be 100% compatible with the equivalent Cisco® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Skylane's transceivers are RoHS compliant and lead-free.

### Features:

- SFF-8432 and SFF-8472 Compliance
- Duplex LC Connector
- Industrial Temperature -40 to 85 Celsius
- Single-mode Fiber
- Hot Pluggable
- Excellent ESD Protection
- Metal with Lower EMI
- RoHS Compliant and Lead Free



### Applications:

- 10x Gigabit Ethernet over DWDM
- Access, Metro and Enterprise
- 8x/10x Fibre Channel

---

*For your product safety, please read the following information carefully before any manipulation of the transceiver:*



#### **ESD**

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 /JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



#### **LASER SAFETY**

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

*The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.*

---

## Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4
- ESD to the LC Receptacle: compatible with IEC 61000-4-3
- EMI/EMC compatible with FCC Part 15 Subpart B Rules, EN55022:2010
- Laser Eye Safety compatible with FDA 21CFR, EN60950-1& EN (IEC) 60825-1,2
- RoHS compliant with EU RoHS 2.0 directive 2015/863/EU

## Tunable SFP+ Channel Number and Wavelength

| Channel No. | Frequency (THz) | Center Wavelength (nm) | Channel No | Frequency (THz) | Center Wavelength (nm) |
|-------------|-----------------|------------------------|------------|-----------------|------------------------|
| 1           | 191.35          | 1566.72                | 49         | 193.75          | 1547.32                |
| 2           | 191.40          | 1566.31                | 50         | 193.80          | 1546.92                |
| 3           | 191.45          | 1565.90                | 51         | 193.85          | 1546.52                |
| 4           | 191.50          | 1565.50                | 52         | 193.90          | 1546.12                |
| 5           | 191.55          | 1565.09                | 53         | 193.95          | 1545.72                |
| 6           | 191.60          | 1564.68                | 54         | 194.00          | 1545.32                |
| 7           | 191.65          | 1564.27                | 55         | 194.05          | 1544.92                |
| 8           | 191.70          | 1563.86                | 56         | 194.10          | 1544.53                |
| 9           | 191.75          | 1563.45                | 57         | 194.15          | 1544.13                |
| 10          | 191.80          | 1563.05                | 58         | 194.20          | 1543.73                |
| 11          | 191.85          | 1562.64                | 59         | 194.25          | 1543.33                |
| 12          | 191.90          | 1562.23                | 60         | 194.30          | 1542.94                |
| 13          | 191.95          | 1561.83                | 61         | 194.35          | 1542.54                |
| 14          | 192.00          | 1561.42                | 62         | 194.40          | 1542.14                |
| 15          | 192.05          | 1561.01                | 63         | 194.45          | 1541.75                |
| 16          | 192.10          | 1560.61                | 64         | 194.50          | 1541.35                |
| 17          | 192.15          | 1560.20                | 65         | 194.55          | 1540.95                |
| 18          | 192.20          | 1559.79                | 66         | 194.60          | 1540.56                |
| 19          | 192.25          | 1559.39                | 67         | 194.65          | 1540.16                |
| 20          | 192.30          | 1558.98                | 68         | 194.70          | 1539.77                |
| 21          | 192.35          | 1558.58                | 69         | 194.75          | 1539.37                |
| 22          | 192.40          | 1558.17                | 70         | 194.80          | 1538.98                |
| 23          | 192.45          | 1557.77                | 71         | 194.85          | 1538.58                |
| 24          | 192.50          | 1557.36                | 72         | 194.90          | 1538.19                |
| 25          | 192.55          | 1556.96                | 73         | 194.95          | 1537.79                |
| 26          | 192.60          | 1556.56                | 74         | 195.00          | 1537.40                |
| 27          | 192.65          | 1556.15                | 75         | 195.05          | 1537.00                |
| 28          | 192.70          | 1555.75                | 76         | 195.10          | 1536.61                |
| 29          | 192.75          | 1555.34                | 77         | 195.15          | 1536.22                |
| 30          | 192.80          | 1554.94                | 78         | 195.20          | 1535.82                |
| 31          | 192.85          | 1554.54                | 79         | 195.25          | 1535.43                |
| 32          | 192.90          | 1554.13                | 80         | 195.30          | 1535.04                |
| 33          | 192.95          | 1553.73                | 81         | 195.35          | 1534.64                |
| 34          | 193.00          | 1553.33                | 82         | 195.40          | 1534.25                |
| 35          | 193.05          | 1552.93                | 83         | 195.45          | 1533.86                |
| 36          | 193.10          | 1552.52                | 84         | 195.50          | 1533.47                |
| 37          | 193.15          | 1552.12                | 85         | 195.55          | 1533.07                |

|    |        |         |    |        |         |
|----|--------|---------|----|--------|---------|
| 38 | 193.20 | 1551.72 | 86 | 195.60 | 1532.68 |
| 39 | 193.25 | 1551.32 | 87 | 195.65 | 1532.29 |
| 40 | 193.30 | 1550.92 | 88 | 195.70 | 1531.90 |
| 41 | 193.35 | 1550.52 | 89 | 195.75 | 1531.51 |
| 42 | 193.40 | 1550.12 | 90 | 195.80 | 1531.12 |
| 43 | 193.45 | 1549.72 | 91 | 195.85 | 1530.72 |
| 44 | 193.50 | 1549.32 | 92 | 195.90 | 1530.33 |
| 45 | 193.55 | 1548.91 | 93 | 195.95 | 1529.94 |
| 46 | 193.60 | 1548.52 | 94 | 196.00 | 1529.55 |
| 47 | 193.65 | 1548.11 | 95 | 196.05 | 1529.16 |
| 48 | 193.70 | 1547.72 | 96 | 196.10 | 1528.77 |

### Absolute Maximum Ratings

| Parameter                  | Symbol | Min. | Max. | Unit | Notes   |
|----------------------------|--------|------|------|------|---------|
| Maximum Supply Voltage     | VccT   | 0    | +3.6 | V    | +3.3V   |
| Optical Receiver Input     | PIMAX  |      | +5   | dBm  | Average |
| Operating Case Temperature | Tc     | -40  | 85   | °C   |         |
| Storage Temperature        | TSTR   | -40  | 85   | °C   |         |
| ESD SFI pins               | ESD1   |      | 1    | kV   | HBM     |
| ESD except for SFI pins    | ESD2   |      | 2    | kV   | HBM     |

### Electrical Characteristics

| Parameter                          | Symbol   | Min.  | Typ.  | Max.      | Unit | Notes                                         |
|------------------------------------|----------|-------|-------|-----------|------|-----------------------------------------------|
| Supply Voltage                     | Vcc      | 3.135 | 3.300 | 3.465     | V    |                                               |
| Supply Current                     | Icc3     |       |       | 0.73      | A    |                                               |
| Power Consumption                  | PDS      |       |       | 2.3       | W    |                                               |
| Low Speed Control Pin Logic Levels |          |       |       |           |      |                                               |
| Host Vcc Range                     | Host_Vcc | 3.14  |       | 3.47      | V    | with ± 5% variation                           |
| TX_Fault,<br>RX_LOS                | VOL      | 0.0   |       | 0.4       | V    | Note 1                                        |
|                                    | VOH      | 2.0   |       | Vcc+0.3   | V    | Note 1                                        |
| TX_Disable                         | VIL      | -0.3  |       | 0.8       | V    | Pulled up with 10k ohms to VccT in the module |
|                                    | VIH      | 2.0   |       | VccT +0.3 | V    |                                               |

#### Notes:

1. Rpullup (Rp) is the pull up resistor. Active bus termination may be used by the host in place of a pullup resistor. Pull ups can be connected to multiple power supplies, however the host board design shall ensure that no module pin has voltage exceeding module. Measures at the Host side of the connector.

## Optical Characteristics

| Parameter                                          | Symbol            | Min.                | Typ. | Max.   | Unit   | Notes                                  |
|----------------------------------------------------|-------------------|---------------------|------|--------|--------|----------------------------------------|
| <b>Transmitter</b>                                 |                   |                     |      |        |        |                                        |
| Data Rate                                          |                   | 1.2                 |      | 11.3   | Gbit/s | NRZ                                    |
| Frequency range                                    |                   | 191.35              |      | 196.10 | THz    | 50GHz grid, 96 channels                |
| Frequency accuracy                                 |                   | -2.5                |      | +2.5   | GHz    | EOL                                    |
| Optical transmit power                             | P <sub>o</sub>    | -1.0                |      | +3.0   | dBm    | EOL                                    |
| Shuttered output power                             |                   |                     |      | -35    | dBm    |                                        |
| Optical power stability                            | ΔP <sub>o</sub>   | -1.0                |      | +1.0   | dB     | All channels, SOL                      |
| Side mode suppression                              | SMSR              | 35                  |      |        | dB     | ±2.5nm, modulated                      |
| Spectral width                                     | Δλ                |                     | 0.3  | 0.5    | nm     | -20dB, modulated                       |
| Extinction ratio                                   | ER                | 8.2                 |      |        | dB     | Filtered, 10.3Gb/s                     |
| Eye diagram compliance                             |                   | GR-253, ITU-T G.691 |      |        |        |                                        |
| Mask margin                                        |                   | 10                  |      |        | %      |                                        |
| Tuning speed                                       |                   |                     |      | 10     | s      | warmed-up, from any CH to any other CH |
| <b>Receiver</b>                                    |                   |                     |      |        |        |                                        |
| Data Rate                                          |                   | 1.2                 |      | 11.3   | Gbit/s | NRZ                                    |
| Input operating wavelength                         |                   | 1525                |      | 1575   | nm     |                                        |
| Minimum Receiver Sensitivity (Back to Back)        | Pr <sub>min</sub> |                     |      | -24    | dBm    | 10.3Gb/s, 1E-12, OSNR>35dB             |
| Minimum Receiver Sensitivity (+1100ps/nm)          |                   |                     |      | -23    | dBm    |                                        |
| Minimum Receiver Sensitivity (-300 to +1400 ps/nm) |                   |                     |      | -21    | dBm    |                                        |
| Maximum input power (overload)                     | Pro               | -7                  |      |        | dBm    |                                        |
| Receiver Reflectance                               | RL                |                     |      | -27    | dB     |                                        |
| LOS Assert                                         |                   | -27.5               |      |        | dBm    |                                        |
| LOS De-Assert                                      | LOS <sub>p</sub>  |                     |      | -24    | dBm    |                                        |
| LOS Hysteresis                                     |                   | 0.1                 |      |        | dB     |                                        |
| LOS Assert Time                                    |                   |                     |      | 100    | us     |                                        |
| LOS De-Assert Time                                 |                   |                     |      | 100    | us     |                                        |

## Auto tuning

The autotuning process is a host independent scheme. When the TSFP+ modules with auto-tuning implemented are inserted into the corresponding electrical ports at a central office and a remote site, both modules will automatically start the automatic tuning process.

The process ensures that the TSFP+ modules tune to the channel defined by the DWDM filter (MUX/DeMUX) which both modules are connected to. The first module to converge on the correct channel initiates a unique process, which helps both sides of the link communicate properly.

After completion of the auto-tune process, both modules fix their wavelengths and move into normal 10Gbit/s operation. A LOS condition, a shutdown condition (Tx Disable) and a power cycle shall trigger a restart of the auto tuning process.

The TSFP+ module shall appear as a regular Tunable product to the host system once Auto-tune is completed.

## Tuning Parameter


| No. | Parameter                                    | Min                       | Max   | Unit   | Description              |
|-----|----------------------------------------------|---------------------------|-------|--------|--------------------------|
| 1   | Channel to channel switch time during tuning |                           | 3.256 | s      |                          |
| 2   | Tuning convergence time                      |                           | 340   | s      | Not including cold start |
| 3   | Timeout (t1)                                 | 400                       |       | s      |                          |
| 4   | LOS timeout (t2)                             | 15                        | 16    | s      |                          |
| 5   | Default channel                              | 191.35                    |       | THz    |                          |
| 6   | Channel Sequence                             | 191.35<br>191.40....196.1 |       | THz    | 50GHz grid               |
| 7   | Modulation rate                              | 125                       |       | Baud/s | Manchester encoding      |
| 8   | Bit rate                                     | 62.5                      |       | Bit/s  |                          |

## SFP+ 2 Wire Interface Timing Requirements

| Parameter                                            | Symbol       | Min  | Max  | Unit   | Conditions                                                                         |
|------------------------------------------------------|--------------|------|------|--------|------------------------------------------------------------------------------------|
| Clock Frequency                                      | fSCL         | 100  | 400  | kHz    |                                                                                    |
| Clock Pulse Width Low                                | tLOW         | 1.3  | -    | μs     |                                                                                    |
| Clock Pulse Width High                               | tHIGH        | 0.6  | -    | μs     |                                                                                    |
| Time bus free before new transaction can start       | tBUF         | 20   | -    | μs     | Between STOP and START                                                             |
| START Hold time                                      | tHD,STA      | 0.6  | -    | μs     |                                                                                    |
| START Set-Up time                                    | tSU,STA      | 0.6  | -    | μs     |                                                                                    |
| Data in Hold time                                    | tHD,DAT      | 0    | -    | μs     |                                                                                    |
| Data in Set-Up time                                  | tSU,DAT      | 0.1  | -    | μs     |                                                                                    |
| Input Rise time (100 kHz)                            | tR,100       | -    | 1000 | ns     | Note 1                                                                             |
| Input Rise time (400 kHz)                            | tR,400       | -    | 300  | ns     | Note 1                                                                             |
| Input Fall time (100 kHz)                            | tF,100       | -    | 300  | ns     | Note 1                                                                             |
| Input Fall time (400 kHz)                            | tF,400       | -    | 300  | ns     | Note 1                                                                             |
| STOP Set-Up time                                     | tSU,STO      | 0.6  | -    | μs     |                                                                                    |
| Serial Interface Clock Holdoff<br>"Clock Stretching" | T_clock_hold | -    | 500  | μs     | Maximum time the SFP+ may hold the SCL line low before continuing R or W operation |
| Complete Single or Sequential Write                  | tWR          | -    | 40   | ms     | Complete (up to) 8 Byte Write                                                      |
| Endurance (Write Cycles)                             |              | 10 k | -    | Cycles | @ Max Operating Temperature                                                        |

### Notes:

1. From (VIL, MAX -0.15) to (VIH, MIN +0.15)

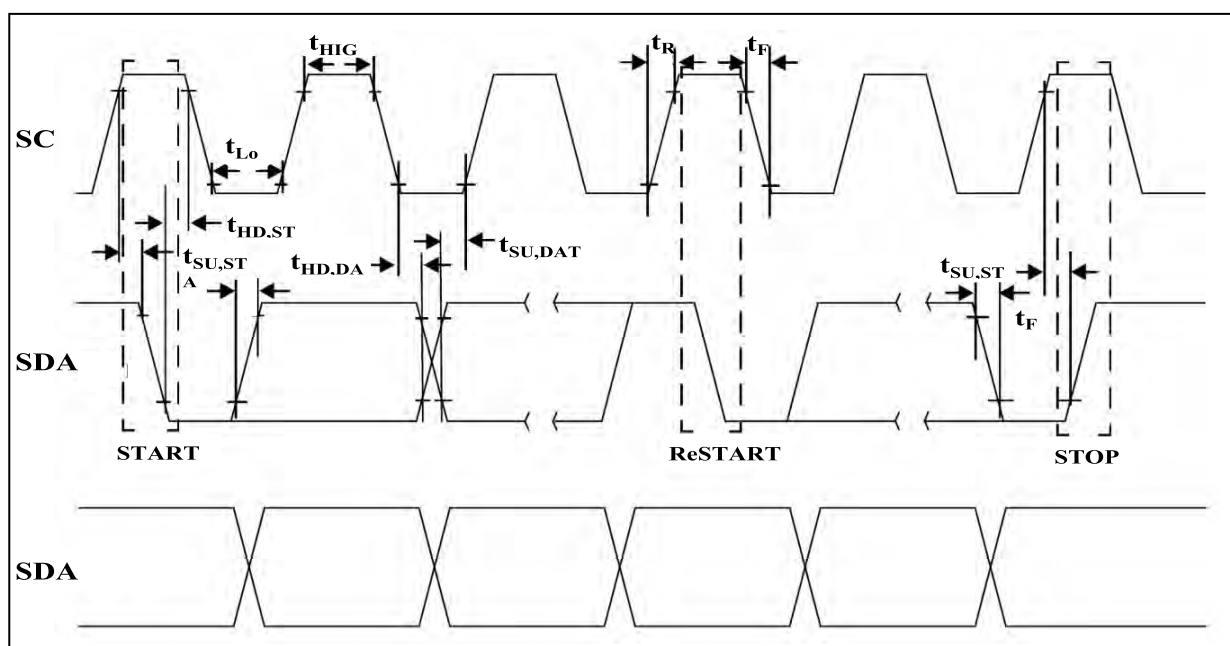

## SFP+ Timing Requirements

| Parameter                                                                                      | Symbol             | Min | Max | Unit | Conditions                                                                                                                                                                                                                                                                                         |
|------------------------------------------------------------------------------------------------|--------------------|-----|-----|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tx_Disable assert time</b>                                                                  | t_off              |     | 100 | μs   | Rising edge of TX_Disable to fall of output signal below 10% of nominal.                                                                                                                                                                                                                           |
| <b>TX_Disable negate time</b>                                                                  | T_on               |     | 2   | ms   | Falling edge of TX Disable to rise output signal above 90% of nominal. This only applies in normal operation, not during start up or fault recovery.                                                                                                                                               |
| <b>Time to initialize 2-wire interface</b>                                                     | t_2w_start_up      |     | 300 | ms   | From power on or hot plug after the supply meeting                                                                                                                                                                                                                                                 |
| <b>Time to initialize cooled module and time to power up a cooled module to Power Level II</b> | t_start_up_cooled  |     | 90  | sec  | From power supplies meeting or hot plug, or Tx disable negated during power up or Tx_Fault recovery, until cooled power level II part during fault recovery is fully operational. Also, from stop bit-low-to-high SDA transition enabling Power Level II until cooled module is fully operational. |
| <b>Tx_Fault assert for cooled module</b>                                                       | Tx_fault_on_cooled |     | 1   | ms   | From occurrence of fault to assertion of TX_Fault                                                                                                                                                                                                                                                  |
| <b>Tx_Fault Reset</b>                                                                          | t_reset            | 10  |     | μs   | Time TX_disable must be held high to reset TX_Fault                                                                                                                                                                                                                                                |
| <b>RX_LOS assert delay</b>                                                                     | t_los_on           |     | 100 | μs   | From occurrence of loss of signal to assertion of RX_LOS                                                                                                                                                                                                                                           |
| <b>Rx_LOS negate delay</b>                                                                     | t_los_off          |     | 100 | μs   | From occurrence of presence of signal to negation of RX_LOS.                                                                                                                                                                                                                                       |
| <b>Maximum Current Ramp on Power Supply</b>                                                    |                    |     |     |      |                                                                                                                                                                                                                                                                                                    |
| <b>Icc instantaneous peak current</b>                                                          |                    |     | 800 | mA   | Note 1,2                                                                                                                                                                                                                                                                                           |
| <b>Icc sustained peak current</b>                                                              |                    |     | 660 | mA   | Note 1,2                                                                                                                                                                                                                                                                                           |

### Notes:

1. The maximum currents are the allowed currents for each power supply VccT or VccR, therefore the total module peak currents can be twice this value. The instantaneous peak current is allowed to exceed the specified maximum current capacity of the connector contact for a short period.
2. Not to exceed the sustained peak limit for the more than 50 μs; may exceed this limit for shorter durations.


## Pin Descriptions

| Pin | Logic     | Symbol     | Power Sequence Order | Name/Descriptions                                      | Ref. |
|-----|-----------|------------|----------------------|--------------------------------------------------------|------|
| 1   |           | VeeT       | 1                    | Module Transmitter Ground                              | 1    |
| 2   | LVTTL-O   | TX_Fault   | 3                    | Module Transmitter Fault                               | 2    |
| 3   | LVTTL-I   | TX_Disable | 3                    | Transmitter Disable; Turn off laser output             | 3    |
| 4   | LVTTL-I/O | SDA        | 3                    | 2-Wire Serial Interface Data Line                      |      |
| 5   | LVTTL-I/O | SCL        | 3                    | 2-Wire Serial Interface Clock                          |      |
| 6   |           | Mod_Abs    | 3                    | Module Absent, connected to VeeT or VeeR in the module | 4    |
| 7   | LVTTL-I   | RS0        | 3                    | NA. 30kohm pull down inside the module                 |      |
| 8   | LVTTL-O   | RX_LOS     | 3                    | Receiver Loss of Signal Indicator                      | 2    |
| 9   | LVTTL-I   | RS1        | 3                    | NA. 30kohm pull down inside the module                 |      |
| 10  |           | VeeR       | 1                    | Module Receiver Ground                                 | 1    |
| 11  |           | VeeR       | 1                    | Module Receiver Ground                                 | 1    |
| 12  | CML-O     | RD-        | 3                    | Receiver Inverted Data Output (SFI)                    |      |
| 13  | CML-O     | RD+        | 3                    | Receiver Non-Inverted Data Output (SFI)                |      |
| 14  |           | VeeR       | 1                    | Module Receiver Ground                                 | 1    |
| 15  |           | VccR       | 2                    | Module Receiver 3.3V Supply                            | 5    |
| 16  |           | VccT       | 2                    | Module Transmitter 3.3V Supply                         | 5    |
| 17  |           | VeeT       | 1                    | Module Transmitter Ground                              | 1    |
| 18  | CML-I     | TD+        | 3                    | Transmitter Non-Inverted Data Output (SFI)             |      |
| 19  | CML-I     | TD-        | 3                    | Transmitter Inverted Data Output (SFI)                 |      |
| 20  |           | VeeT       | 1                    | Module Transmitter Ground                              | 1    |

### Notes:


1. The module signal ground pins, VeeR and VeeT, are isolated from the module case.
2. This pin is an open drain output pin and shall be pulled up with a 4.7k-10kohms to Host\_Vcc on the host board. Pull ups can be connected to multiple power supplies, however the host board design shall ensure that no module pin has voltage exceeding module VccT/R + 0.5V.
3. This pin is an input pin with 10kohms pull up to VccT in the module.
4. This pin shall be pulled up with 4.7k-10kohms to Host\_Vcc on the host board.
5. VccT and VccR are tied together inside the module.



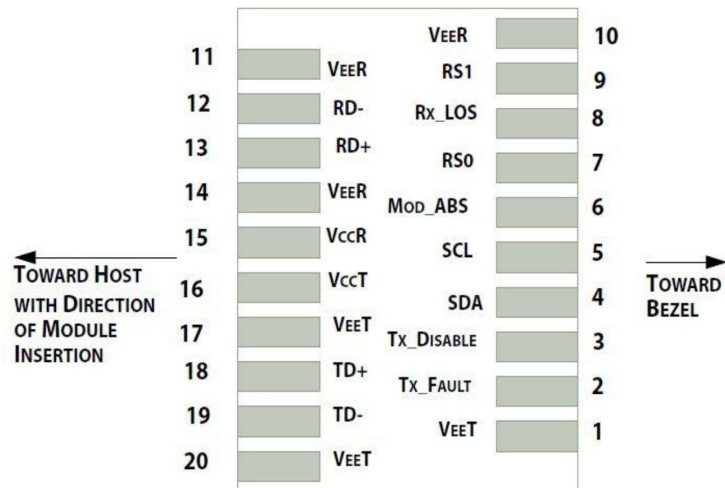


Pin-out of connector Block on Host board

## Recommended Circuit Schematic

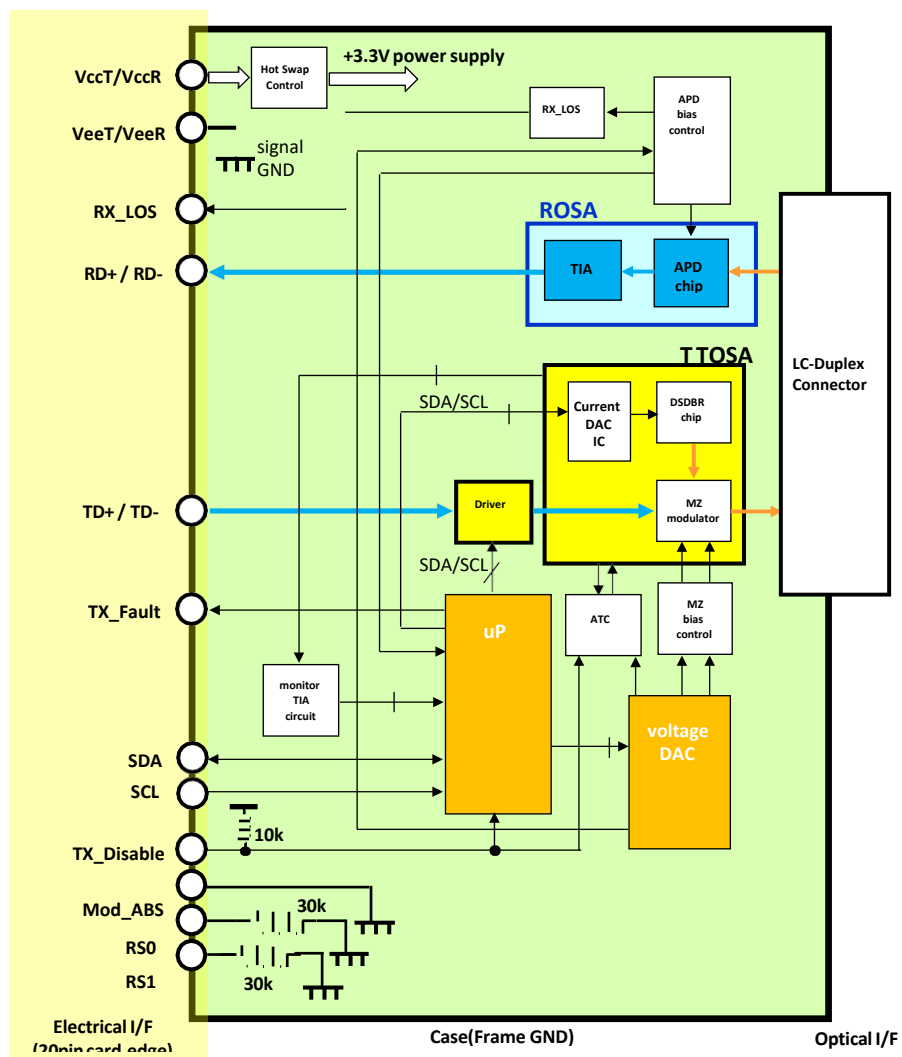

**Mechanical Specifications**

Small Form Factor Pluggable (SFP) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).

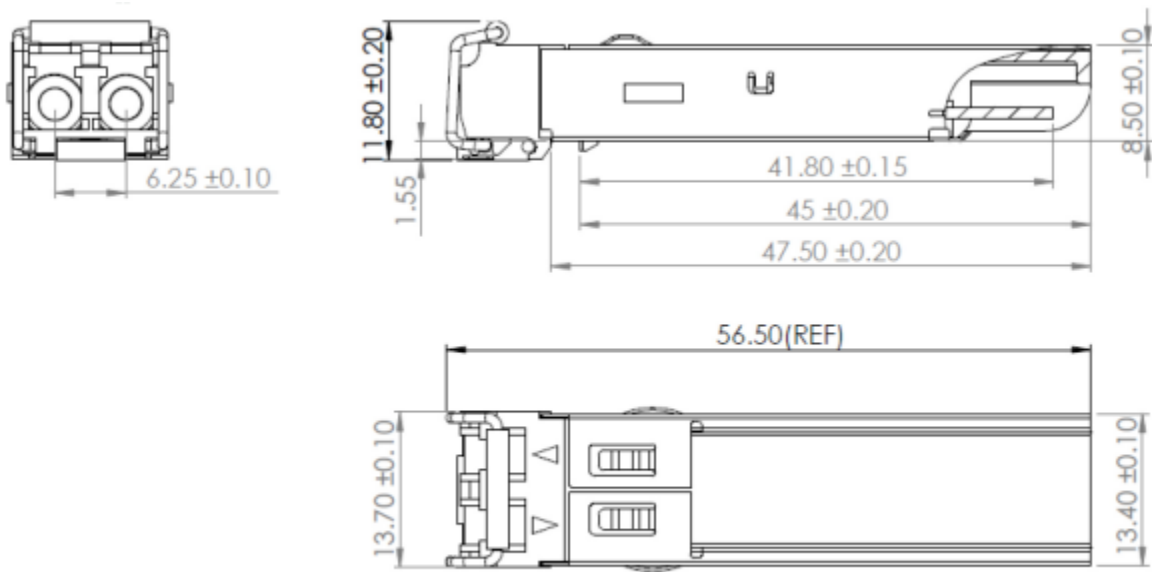

**EEPROM Information**

EEPROM memory map specific data field description is as below:

| 2 wire address 1010000X (A0h)           | 2 wire address 1010001X (A2h)             |
|-----------------------------------------|-------------------------------------------|
| 0                                       | 0                                         |
| Serial ID Defined by SFP MSA (96 bytes) | Alarm and Warning Thresholds (56 bytes)   |
| 95                                      | 55                                        |
| Vendor Specific (32 bytes)              | Cal Constants (40 bytes)                  |
| 127                                     | 95                                        |
| Reserved, SFF8079 (128 bytes)           | Real Time Diagnostic Interface (24 bytes) |
| 255                                     | 119                                       |
|                                         | Vendor Specific (8 bytes)                 |
|                                         | 127                                       |
|                                         | User Writable EEPROM (120 bytes)          |
|                                         | 247                                       |
|                                         | Vendor Specific (8 bytes)                 |
|                                         | 255                                       |

# About Skylane Optics

Skylane is a leading provider of transceivers for optical communication.

We offer an extensive portfolio for the enterprise, access, datacenter and metropolitan fiber optical market as well as for smart home applications and home networks.

We cover the European, South American and North American market with a strong partner network and have offices in Belgium, Brazil, Sweden and USA.

Our offerings are characterized by high quality and performance. In combination with our strong technical support, we enable our customers to build cost optimized network solutions.

We offer an extensive range of high-quality products including transceivers (Optical and copper), Active Optical Cable (AOC), Direct Attach Cable (DAC), Mux/Demux, Coding Box.

