



QDD-800GB-2XFR4-N-SKY

Alcatel-Lucent Nokia® Compatible 800GBase-2xFR4 QSFP-DD Transceiver (SMF, 1310nm, 2km, 2xLC, DOM, 0 to 70C, CMIS 5.0)

Product Description

This Alcatel-Lucent Nokia® compatible QSFP-DD transceiver provides 800GBase-2xFR4 throughput up to 2km over single-mode fiber (SMF) PAM4 using a wavelength of 1310nm via a 2xLC connector. It can operate at temperatures between 0 and 70C. All of our transceivers are built to comply with Multi-Source Agreement (MSA) standards and are uniquely serialized and tested for data-traffic and application to ensure seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Skylane's transceivers are RoHS compliant and lead-free.

Features:

- Compliant with IEEE 802.3cu-2021: 2x400GBASE-FR4 Optical Interface
- Dual LC Connectors
- Compliant with IEEE P802.3ck D3.0- 2x400GAUI-4 C2M Electrical Interface
- 800 QSFP-DD MSA Complaint
- Class 1 Laser Safety Certified
- CMIS 5.0 Compliant
- RoHS Compliant and Lead-Free
- Operating Temperature: 0 to 70 Celsius



Applications:

- 2x400GBase Ethernet

For your product safety, please read the following information carefully before any manipulation of the transceiver:



ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 /JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Storage Temperature	Tstg	-40		85	°C	
Operating Case Temperature	Tc	0		70	°C	
Power Supply Voltage	Vcc	-0.5		3.6	V	
Relative Humidity (Non-Condensing)	RH	5		95	%	
Data Input Voltage Differential	V _{DIP-V_{DIN}}			1	V	
Control Input Voltage	V _I	-0.3		Vcc+0.5	V	
Control Output Current	I _O	-20		20	mA	
Signaling Speed Per Lane	DR		53.125		GBd	
Operating Distance		2		10000	m	MSA
		2		6000		IEEE

Electrical Characteristics

Parameter		Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage		Vcc	3.135	3.3	3.465	V	
Instantaneous Peak Current at Hot Plug		Icc_IP			7600	mA	
Sustained Peak Current at Hot Plug		Icc_SP			6270	mA	
Maximum Power Dissipation		PD			19	W	
Maximum Power Dissipation (Low-Power Mode)		PD _{LP}			2.5	W	
Control Input Voltage - High		V _{IH}	Vcc*0.7		Vcc+0.3	V	
Control Input Voltage - Low		V _{IL}	-0.3		Vcc*0.3	V	
2-Wire Serial Interface Clock Rate					400	kHz	
Power Supply Noise (1kHz to 1MHz, Pk-Pk)					66	mVp-p	
Transmitter (Module Input, TP1)							
Differential Pk-Pk Input Voltage Tolerance (TP1a)			750			mV	
Pk-Pk AC Common-Mode Voltage Tolerance	Low-Frequency (VCM _{LF})		32			mV	
	Full-Band (VCM _{FB})		80			mV	
Differential-Mode to Common-Mode Return Loss		RLcd	802.3ck 120G-2			dB	
Effective Return Loss		ERL	8.5			dB	
Differential Termination Mismatch					10	%	
Single-Ended Voltage Tolerance Range			-0.4		3.3	V	
DC Common-Mode Voltage Tolerance			-0.35		2.85	V	
Receiver (Module Output, TP4)							
Pk-Pk AC Common-Mode Voltage	Low-Frequency (VCM _{LF})				32	mV	
	Full-Band (VCM _{FB})				80	mV	
Differential Pk-Pk Output		Short-Mode			600	mV	

Voltage	Long-Mode				845	mV	
Eye Height		EH	15			mV	
Vertical Eye Closure		VEC			12	dB	
Common-Mode to Differential-Mode Return Loss		RLDc	802.3ck 120G-1			dB	
Effective Return Loss		ERL	8.5			dB	
Differential Termination Mismatch					10	%	
Transition Time			8.5			ps	
DC Common-Mode Voltage Tolerance			-0.35		2.85	V	

Electrical Low-Speed Control and Sense Signal Specifications

Parameter	Symbol	Min.	Max.	Unit	Notes
Module Output SCL and SDA	VOL	0	0.4	V	
Module Input SCL and SDA	VIL	-0.3	Vcc*0.3	V	
	VIH	Vcc*0.7	Vcc+0.5	V	
InitMode, ResetL, and ModSelL	VIL	-0.3	0.8	V	
	VIH	2	Vcc+0.3	V	
IntL	VOL	0	0.4	V	
	VOH	Vcc-0.5	Vcc+0.3	V	

Optical Characteristics

Parameter		Symbol	Min.	Typ.	Max.	Unit	Notes
Transmitter							
Wavelength	L0, L4	λ_C	1264.5	1271	1277.5	nm	
	L1, L5		1284.5	1291	1297.5		
	L2, L6		1304.5	1311	1317.5		
	L3, L7		1324.5	1331	1337.5		
Side-Mode Suppression Ratio		SMSR	30			dB	
Total Average Launch Power		AOP _T			11.1	dBm	
Average Launch Power Per Lane		AOP _L	-2.7		5.1	dBm	1
Outer Optical Modulation Amplitude (OMA _{outer}) Per Lane	TDECQ < 1.4dB	OMA _{outer}	0.3		4.4	dBm	
	1.4dB <= TDECQ <= TDECQ Maximum		-1.1 + TDECQ				
Difference in Launch Power Between any Two Lanes (OMA _{outer})		AOP _D			4	dB	
Transmitter and Dispersion Eye Closure for PAM4 (TDECQ) Per Lane 10km		TDECQ			3.9	dB	
Transmitter and Dispersion Eye Closure for PAM4 (TDECQ) Per Lane 6km		TDECQ			3.4	dB	
Transmitter Eye Closure for PAM4 (TECQ) Per Lane 10km		TECQ			3.9	dB	

Transmitter Eye Closure for PAM4 (TECQ) Per Lane 6km		TECQ			3.4	dB	
TDECQ - TECQ					2.5	dB	
Over/Under-Shoot 10km					25	%	
Over/Under-Shoot 6km					22	%	
Pk-Pk Power 10km					5.2	dBm	
Transmitter Power Excursion 6m					2.5	dBm	
Average Launch Power of Off Transmitter Per Lane		Toff			-16	dBm	
Extinction Ratio		ER	3.5			dB	
Transmitter Transition Time		Tr			17	ps	
RIN _{15.6} OMA		RIN			-136	dB/Hz	
Optical Return Loss Tolerance		ORLT			15.6	dB	
Transmitter Reflectance		TR			-26	dB	2
Receiver							
Wavelength	L0, L4	λ_C	1264.5	1271	1277.5	nm	
	L1, L5		1284.5	1291	1297.5		
	L2, L6		1304.5	1311	1317.5		
	L3, L7		1324.5	1331	1337.5		
Damage Threshold Per Lane		AOP _D	6.1			dBm	
Average Receive Power Per Lane		AOP _R	-9		5.1	dBm	
Receive Power (OMAouter) Per Lane		OMA _R			4.4	dBm	
Difference in Receive Power Between Any Two Lanes (OMAouter)		AOP _G			4.3	dB	
Receiver Reflectance		RR			-26	dB	
Receiver Sensitivity (OMAouter) Per Lane	TECQ < 1.4dB	SOMA			-6.8	dBm	
	1.4dB <= TECQ <= 3.4dB				-8.2 + TECQ		
Stressed Receiver Sensitivity (OMAouter) Per Lane 10km		SRS			-4.3	dBm	3
Stressed Receiver Sensitivity (OMAouter) Per Lane 6km		SRS			-4.8	dBm	3
Conditions of Stressed Receiver Sensitivity Test							
Stressed Eye Closure for PAM4 (SECQ) Per Lane Under Test 10km		SECQ		3.9		dB	
Stressed Eye Closure for PAM4 (SECQ) Per Lane Under Test 6km				3.4		dB	
OMAouter of Each Aggressor Lane				-0.4		dBm	

Notes:


1. Average launch power, per lane (minimum), is informative and not the principal indicator of signal strength.
2. Transmitter reflectance is defined looking into the transmitter.
3. Measured with conformance test signal at TP3 for the BER = 2.4×10^{-4} .

Pin Descriptions


Pin	Symbol	Logic	Name/Description	Notes
1	GND		Module Ground.	
2	Tx2-	CML-I	Transmitter Inverted Data Input.	
3	Tx2+	CML-I	Transmitter Non-Inverted Data Input.	
4	GND		Module Ground.	
5	Tx4-	CML-I	Transmitter Inverted Data Input.	
6	Tx4+	CML-I	Transmitter Non-Inverted Data Input.	
7	GND		Module Ground.	
8	ModSelL	LVTTTL-I	Module Select.	
9	ResetL	LVTTTL-I	Module Reset.	
10	VccRx		+3.3V Receiver Power Supply.	
11	SCL	LVC MOS-I/O	2-Wire Serial Interface Clock.	
12	SDA	LVC MOS-I/O	2-Wire Serial Interface Data.	
13	GND		Module Ground.	
14	Rx3+	CML-O	Receiver Non-Inverted Data Output.	
15	Rx3-	CML-O	Receiver Inverted Data Output.	
16	GND		Module Ground.	
17	Rx1+	CML-O	Receiver Non-Inverted Data Output.	
18	Rx1-	CML-O	Receiver Inverted Data Output.	
19	GND		Module Ground.	
20	GND		Module Ground.	
21	Rx2-	CML-O	Receiver Inverted Data Output.	
22	Rx2+	CML-O	Receiver Non-Inverted Data Output.	
23	GND		Module Ground.	
24	Rx4-	CML-O	Receiver Inverted Data Output.	
25	Rx4+	CML-O	Receiver Non-Inverted Data Output.	
26	GND		Module Ground.	
27	ModPrsL	LVTTTL-O	Module Present.	
28	IntL/RxLOS	LVTTTL-O	Interrupt. Optionally RxLOS.	
29	VccTx		+3.3V Transmitter Power Supply.	
30	Vcc1		+3.3V Power Supply.	
31	LPMode/TxDis	LVTTTL-I	Low-Power Mode. Optionally Tx_Disable	
32	GND		Module Ground.	
33	Tx3+	CML-I	Transmitter Non-Inverted Data Input.	
34	Tx3-	CML-I	Transmitter Inverted Data Input.	
35	GND		Module Ground.	
36	Tx1+	CML-I	Transmitter Non-Inverted Data Input.	
37	Tx1-	CML-I	Transmitter Inverted Data Input.	
38	GND		Module Ground.	
39	GND		Module Ground.	
40	Tx6-	CML-I	Transmitter Inverted Data Input.	
41	Tx6+	CML-I	Transmitter Non-Inverted Data Input.	

42	GND		Module Ground.	
43	Tx8-	CML-I	Transmitter Inverted Data Input.	
44	Tx8+	CML-I	Transmitter Non-Inverted Data Input.	
45	GND		Module Ground.	
46	P/VS4	LVC MOS/CML-I	Programmable. Module Vendor-Specific 4.	
47	P/VS1	LVC MOS/CML-I	Programmable. Module Vendor-Specific 1.	
48	VccRx1		+3.3V Receiver Power Supply.	
49	P/VS2	LVC MOS/CML-O	Programmable. Module Vendor-Specific 2.	
50	P/VS3	LVC MOS/CML-O	Programmable. Module Vendor-Specific 3.	
51	GND		Module Ground.	
52	Rx7+	CML-O	Receiver Non-Inverted Data Output.	
53	Rx7-	CML-O	Receiver Inverted Data Output.	
54	GND		Module Ground.	
55	Rx5+	CML-O	Receiver Non-Inverted Data Output.	
56	Rx5-	CML-O	Receiver Inverted Data Output.	
57	GND		Module Ground.	
58	GND		Module Ground.	
59	Rx6-	CML-O	Receiver Inverted Data Output.	
60	Rx6+	CML-O	Receiver Non-Inverted Data Output.	
61	GND		Module Ground.	
62	Rx8-	CML-O	Receiver Inverted Data Output.	
63	Rx8+	CML-O	Receiver Non-Inverted Data Output.	
64	GND		Module Ground.	
65	NC		Not Connected.	
66	Reserved			
67	VccTx1		+3.3V Power Supply.	
68	Vcc2		+3.3V Power Supply.	
69	ePPS/Clock	LVC MOS-I	1PPS PTP Clock or Reference Clock Input.	
70	GND		Module Ground.	
71	Tx7+	CML-I	Transmitter Non-Inverted Data Input.	
72	Tx7-	CML-I	Transmitter Inverted Data Input.	
73	GND		Module Ground.	
74	Tx5+	CML-I	Transmitter Non-Inverted Data Input.	
75	Tx5-	CML-I	Transmitter Inverted Data Input.	
76	GND		Module Ground.	




Electrical Pad Layout

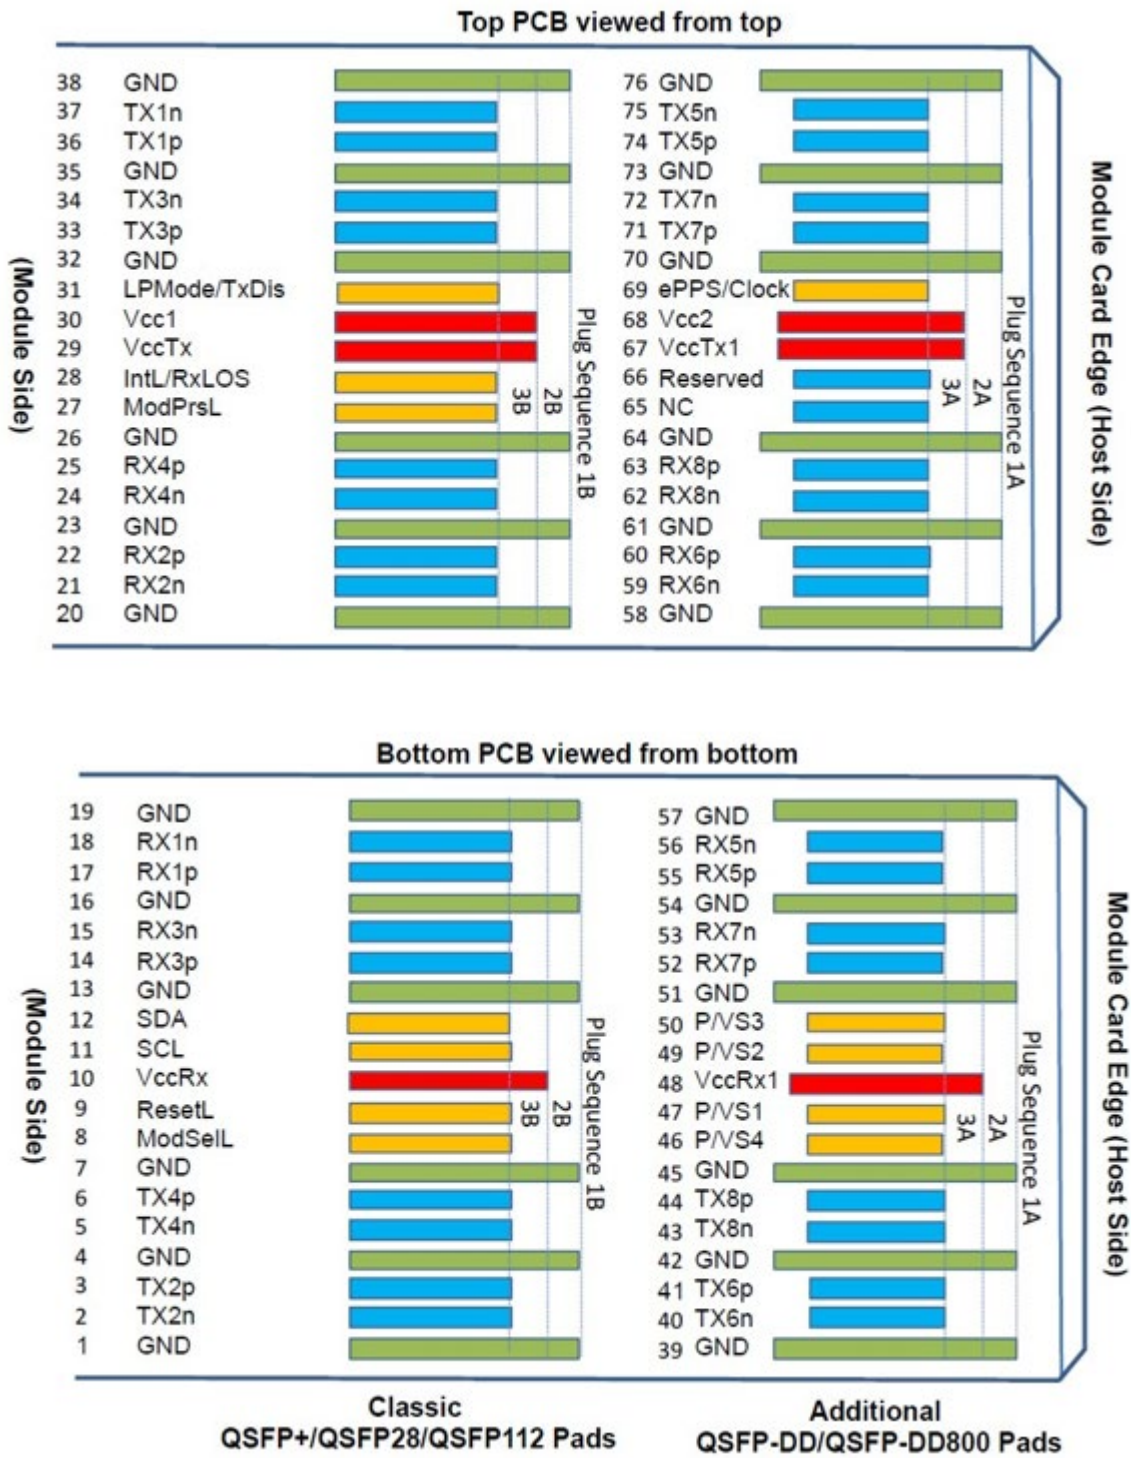

Recommended Host Board Schematic

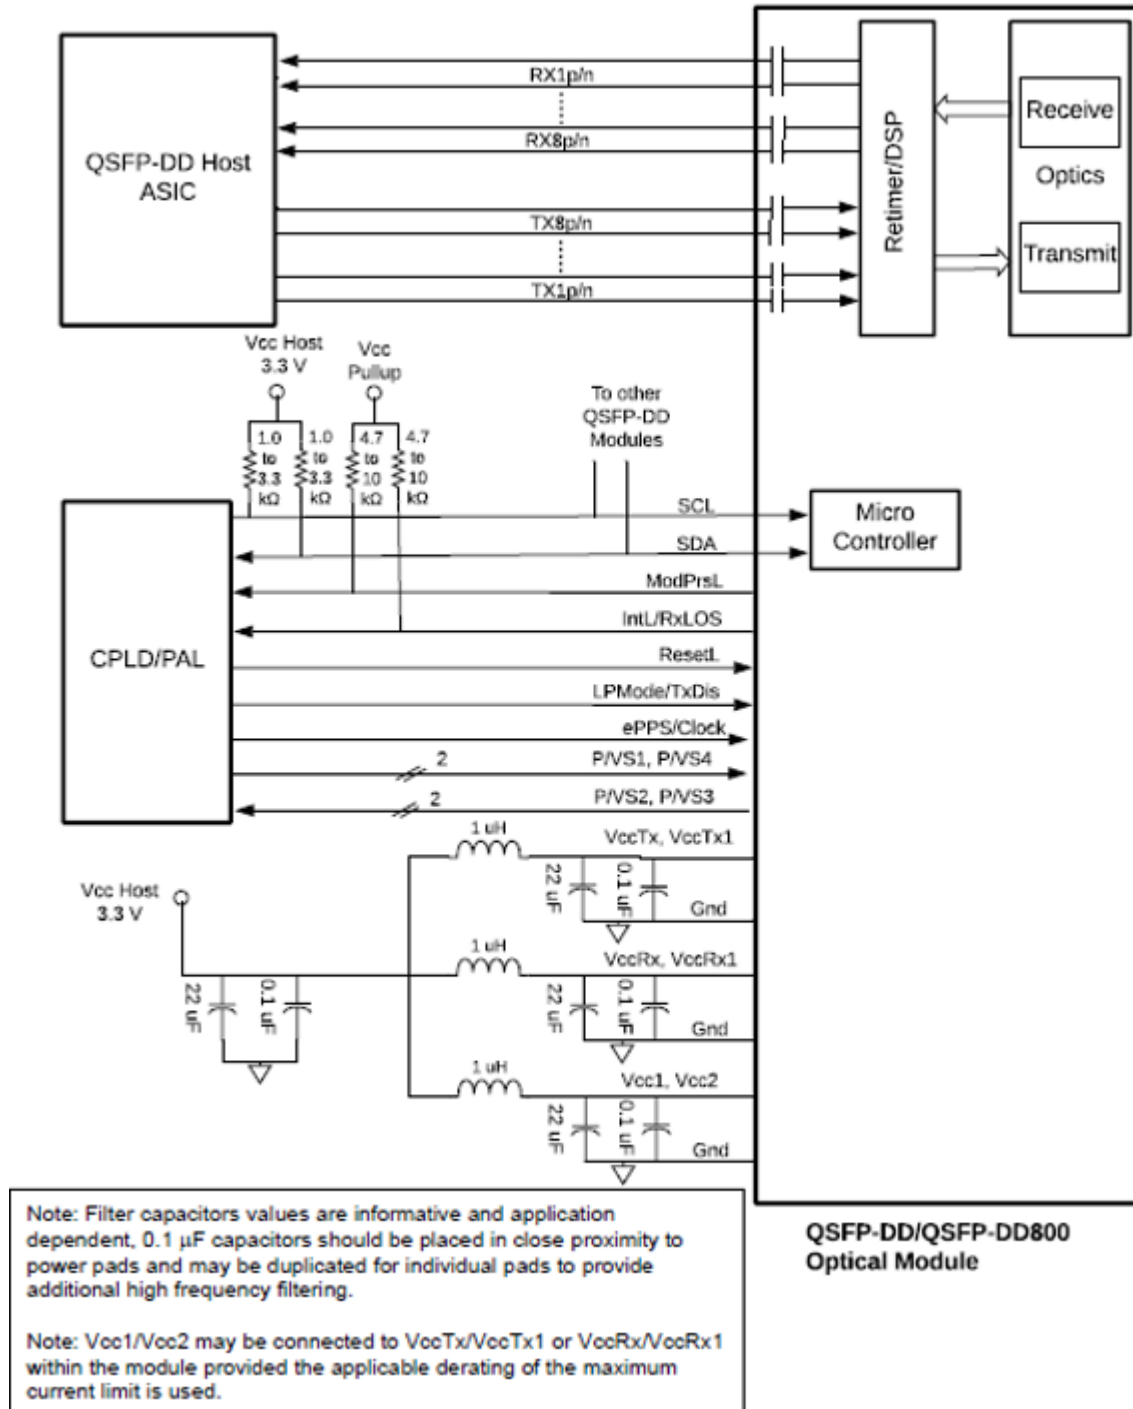

Mechanical Specifications

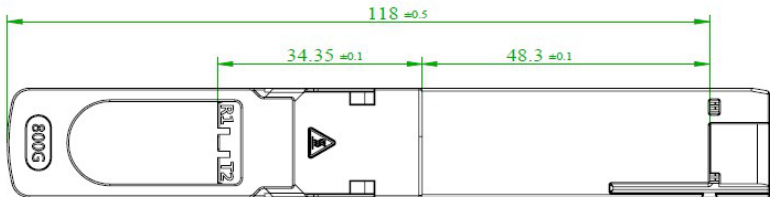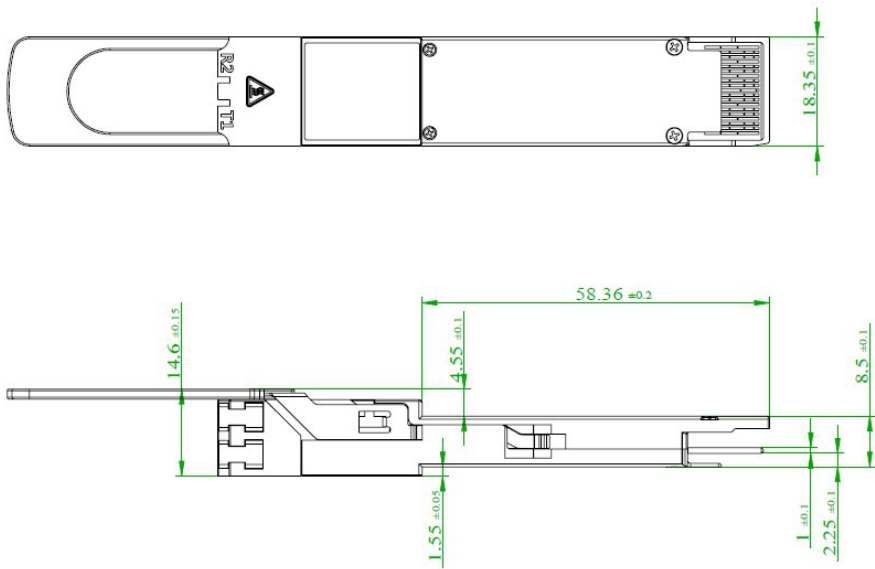

About Skylane Optics

Skylane is a leading provider of transceivers for optical communication.

We offer an extensive portfolio for the enterprise, access, datacenter and metropolitan fiber optical market as well as for smart home applications and home networks.

We cover the European, South American and North American market with a strong partner network and have offices in Belgium, Brazil, Sweden and USA.

Our offerings are characterized by high quality and performance. In combination with our strong technical support, we enable our customers to build cost optimized network solutions.

We offer an extensive range of high-quality products including transceivers (Optical and copper), Active Optical Cable (AOC), Direct Attach Cable (DAC), Mux/Demux, Coding Box.

