



QDD-800GB-DR8-SKY

MSA Compliant 800GBase-DR8 PAM4 QSFP-DD Transceiver (SMF, 1310nm, 500m, MPO-16, DOM, CMIS 5.0)

Product Description

This MSA compliant compatible QSFP-DD transceiver provides 800GBase-DR8 throughput up to 500m over single-mode fiber (SMF) PAM4 using a wavelength of 1310nm via a MPO-16 connector. It can operate at temperatures between 0 and 70C. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Skylane's transceivers are RoHS compliant and lead-free.

Features:

- Compliant with IEEE 802.3cu-2021: 8x100GBASE-DR Optical Interface
- QSFP-DD MSA Compliant
- Compliant with IEEE 802.3ck-2022: 8x100GAUI-1 C2M Electrical Interface
- Compliant with CMIS 5.0
- Operating Temperature: 0 to 70 Celsius
- MPO Connector
- RoHS Compliant and Lead-Free
- Class 1 Laser



Applications:

- 800GBase Ethernet

For your product safety, please read the following information carefully before any manipulation of the transceiver:



ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Storage Temperature	Tstg	-40		85	°C	
Operating Case Temperature	Tc	0		70	°C	
Power Supply Voltage	Vcc	-0.5		3.6	V	
Relative Humidity (Non-Condensing)	RH	5		95	%	
Data Input Voltage Differential	V _{DIP-V_{DIN}}			1	V	
Control Input Voltage	V _I	-0.3		Vcc+0.5	V	
Control Output Current	I _O	-20		20	mA	
Signaling Speed Per Lane	DRL		53.125		GBd	
Operating Distance		2		500	m	

Electrical Characteristics

Parameter		Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage		Vcc	3.135	3.3	3.465	V	
Instantaneous Peak Current at Hot Plug		I _{CC_IP}			7200	mA	
Sustained Peak Current at Hot Plug		I _{CC_SP}			5940	mA	
Maximum Power Dissipation		PD			18	W	
Maximum Power Dissipation (Low-Power Mode)		PD _{LP}			2.5	W	
Control Input Voltage - High		V _{IH}	Vcc*0.7		Vcc+0.3	V	
Control Input Voltage - Low		V _{IL}	-0.3		Vcc*0.3	V	
2-Wire Serial Interface Clock Rate					400	kHz	
Power Supply Noise (1kHz to 1MHz, Pk-Pk)					66	mVp-p	
Transmitter (Module Input, TP1)							
Differential Pk-Pk Input Voltage Tolerance (TP1a)			750			mV	
Pk-Pk AC Common-Mode Voltage Tolerance	Low-Frequency (VCM _{LF})		32			mV	
	Full-Band (VCM _{FB})		80			mV	
Differential-Mode to Common-Mode Return Loss		RLcd	802.3ck 120G-2			dB	
Effective Return Loss		ERL	8.5			dB	
Differential Termination Mismatch					10	%	
Single-Ended Voltage Tolerance Range			-0.4		3.3	V	
DC Common-Mode Voltage Tolerance			-0.35		2.85	V	
Receiver (Module Output, TP4)							
Pk-Pk AC Common-Mode Voltage	Low-Frequency (VCM _{LF})				32	mV	
	Full-Band (VCM _{FB})				80	mV	
Differential Pk-Pk Output Voltage	Short-Mode				600	mV	
	Long-Mode				845	mV	

Eye Height	EH	15			mV	
Vertical Eye Closure	VEC			12	dB	
Common-Mode to Differential-Mode Return Loss	RLDc	802.3ck 120G-1			dB	
Effective Return Loss	ERL	8.5			dB	
Differential Termination Mismatch				10	%	
Transition Time		8.5			ps	
DC Common-Mode Voltage Tolerance		-0.35		2.85	V	

Electrical Low-Speed Control and Sense Signal Specifications

Parameter	Symbol	Min.	Max.	Unit	Notes
Module Output SCL and SDA	VOL	0	0.4	V	
Module Input SCL and SDA	VIL	-0.3	Vcc*0.3	V	
	VIH	Vcc*0.7	Vcc+0.5	V	
InitMode, ResetL, and ModSelL	VIL	-0.3	0.8	V	
	VIH	2	Vcc+0.3	V	
IntL	VOL	0	0.4	V	
	VOH	Vcc-0.5	Vcc+0.3	V	

Optical Characteristics

Parameter		Symbol	Min.	Typ.	Max.	Unit	Notes
Transmitter							
Wavelength		λ_C	1304.5	1311	1317.5	nm	
Side-Mode Suppression Ratio		SMSR	30			dB	
Average Launch Power Per Lane		AOP_L	-2.9		4.0	dBm	1
Outer Optical Modulation Amplitude (OMA _{outer}) Per Lane		TOMA	-0.8		4.2	dBm	
Launch Power in OMA _{outer} minus TDECQ Per Lane	For Extinction Ratio ≥ 5 dB	$T_{OMA-TDECQ}$	-2.2			dBm	
	For Extinction Ratio < 5 dB		-1.9				
Transmitter and Dispersion Eye Closure for PAM4 (TDECQ) Per Lane		TDECQ			3.4	dB	
TDECQ – $10\log_{10}(C_{eq})$ Per Lane		C_{eq}			3.4	dB	
Average Launch Power of Off Transmitter Per Lane		T_{off}			-15	dBm	
Extinction Ratio		ER	3.5			dB	
Transmitter Transition Time		T_r			17	ps	
$RIN_{15.5OMA}$		RIN			-136	dB/Hz	
Optical Return Loss Tolerance		ORLT			15.5	dB	
Transmitter Reflectance		TR			-26	dB	2
Receiver							
Wavelength		λ_C	1304.5	1311	1317.5	nm	
Damage Threshold Per Lane		AOP_D	5			dBm	
Average Receive Power Per Lane		AOP_R	-5.9		4	dBm	
Receive Power (OMA _{outer}) Per Lane		OMA_R			4.2	dBm	
Receiver Reflectance		RR			-26	dB	
Receiver Sensitivity (OMA _{outer}) Per Lane		SOMA			Max. (-3.9, SECQ – 5.3)	dBm	3
Stressed Receiver Sensitivity (OMA _{outer}) Per Lane		SRS			-1.9	dBm	4
Conditions of Stressed Receiver Sensitivity Test							
Stressed Eye Closure for PAM4 (SECQ) Per Lane Under Test		SECQ		3.4		dB	
SECQ – $10\log_{10}(C_{eq})$ Per Lane Under Test		C_{eq}			3.4	dB	
OMA _{outer} of Each Aggressor Lane				4.2		dB	

Notes:


1. Average launch power, per lane (minimum), is informative and not the principal indicator of signal strength.
2. Transmitter reflectance is defined looking into the transmitter.
3. Receiver sensitivity (OMA_{outer}) per lane (maximum) is informative and is defined for a transmitter with a value of SECQ up to 3.4dB.
4. Measured with conformance test signal at TP3 for the BER = 2.4×10^{-4} .

Pin Descriptions


Pin	Symbol	Logic	Name/Description	Notes
1	GND		Module Ground.	
2	Tx2-	CML-I	Transmitter Inverted Data Input.	
3	Tx2+	CML-I	Transmitter Non-Inverted Data Input.	
4	GND		Module Ground.	
5	Tx4-	CML-I	Transmitter Inverted Data Input.	
6	Tx4+	CML-I	Transmitter Non-Inverted Data Input.	
7	GND		Module Ground.	
8	ModSelL	LVTTL-I	Module Select.	
9	ResetL	LVTTL-I	Module Reset.	
10	VccRx		+3.3V Receiver Power Supply.	
11	SCL	LVC MOS-I/O	2-Wire Serial Interface Clock.	
12	SDA	LVC MOS-I/O	2-Wire Serial Interface Data.	
13	GND		Module Ground.	
14	Rx3+	CML-O	Receiver Non-Inverted Data Output.	
15	Rx3-	CML-O	Receiver Inverted Data Output.	
16	GND		Module Ground.	
17	Rx1+	CML-O	Receiver Non-Inverted Data Output.	
18	Rx1-	CML-O	Receiver Inverted Data Output.	
19	GND		Module Ground.	
20	GND		Module Ground.	
21	Rx2-	CML-O	Receiver Inverted Data Output.	
22	Rx2+	CML-O	Receiver Non-Inverted Data Output.	
23	GND		Module Ground.	
24	Rx4-	CML-O	Receiver Inverted Data Output.	
25	Rx4+	CML-O	Receiver Non-Inverted Data Output.	
26	GND		Module Ground.	
27	ModPrsL	LVTTL-O	Module Present.	
28	IntL/RxLOS	LVTTL-O	Interrupt. Optionally configurable as RxLOS via the management interface.	
29	VccTx		+3.3V Transmitter Power Supply.	
30	Vcc1		+3.3V Power Supply.	
31	LPMode/TxDis	LVTTL-I	Low-Power Mode. Optionally configurable as TxDis via the management interface.	
32	GND		Module Ground.	
33	Tx3+	CML-I	Transmitter Non-Inverted Data Input.	
34	Tx3-	CML-I	Transmitter Inverted Data Input.	
35	GND		Module Ground.	
36	Tx1+	CML-I	Transmitter Non-Inverted Data Input.	
37	Tx1-	CML-I	Transmitter Inverted Data Input.	
38	GND		Module Ground.	
39	GND		Module Ground.	
40	Tx6-	CML-I	Transmitter Inverted Data Input.	
41	Tx6+	CML-I	Transmitter Non-Inverted Data Input.	
42	GND		Module Ground.	

43	Tx8-	CML-I	Transmitter Inverted Data Input.	
44	Tx8+	CML-I	Transmitter Non-Inverted Data Input.	
45	GND		Module Ground.	
46	P/VS4	LVC MOS/CML-I	Programmable. Module Vendor-Specific 4.	
47	P/VS1	LVC MOS/CML-I	Programmable. Module Vendor-Specific 1.	
48	VccRx1		+3.3V Receiver Power Supply.	
49	P/VS2	LVC MOS/CML-O	Programmable. Module Vendor-Specific 2.	
50	P/VS3	LVC MOS/CML-O	Programmable. Module Vendor-Specific 3.	
51	GND		Module Ground.	
52	Rx7+	CML-O	Receiver Non-Inverted Data Output.	
53	Rx7-	CML-O	Receiver Inverted Data Output.	
54	GND		Module Ground.	
55	Rx5+	CML-O	Receiver Non-Inverted Data Output.	
56	Rx5-	CML-O	Receiver Inverted Data Output.	
57	GND		Module Ground.	
58	GND		Module Ground.	
59	Rx6-	CML-O	Receiver Inverted Data Output.	
60	Rx6+	CML-O	Receiver Non-Inverted Data Output.	
61	GND		Module Ground.	
62	Rx8-	CML-O	Receiver Inverted Data Output.	
63	Rx8+	CML-O	Receiver Non-Inverted Data Output.	
64	GND		Module Ground.	
65	NC		Not Connected.	
66	Reserved		For Future Use.	
67	VccTx1		+3.3V Power Supply.	
68	Vcc2		+3.3V Power Supply.	
69	ePPS/Clock	LVC MOS-I	1PPS PTP Clock or Reference Clock Input.	
70	GND		Module Ground.	
71	Tx7+	CML-I	Transmitter Non-Inverted Data Input.	
72	Tx7-	CML-I	Transmitter Inverted Data Input.	
73	GND		Module Ground.	
74	Tx5+	CML-I	Transmitter Non-Inverted Data Input.	
75	Tx5-	CML-I	Transmitter Inverted Data Input.	
76	GND		Module Ground.	





Electrical Pad Layout

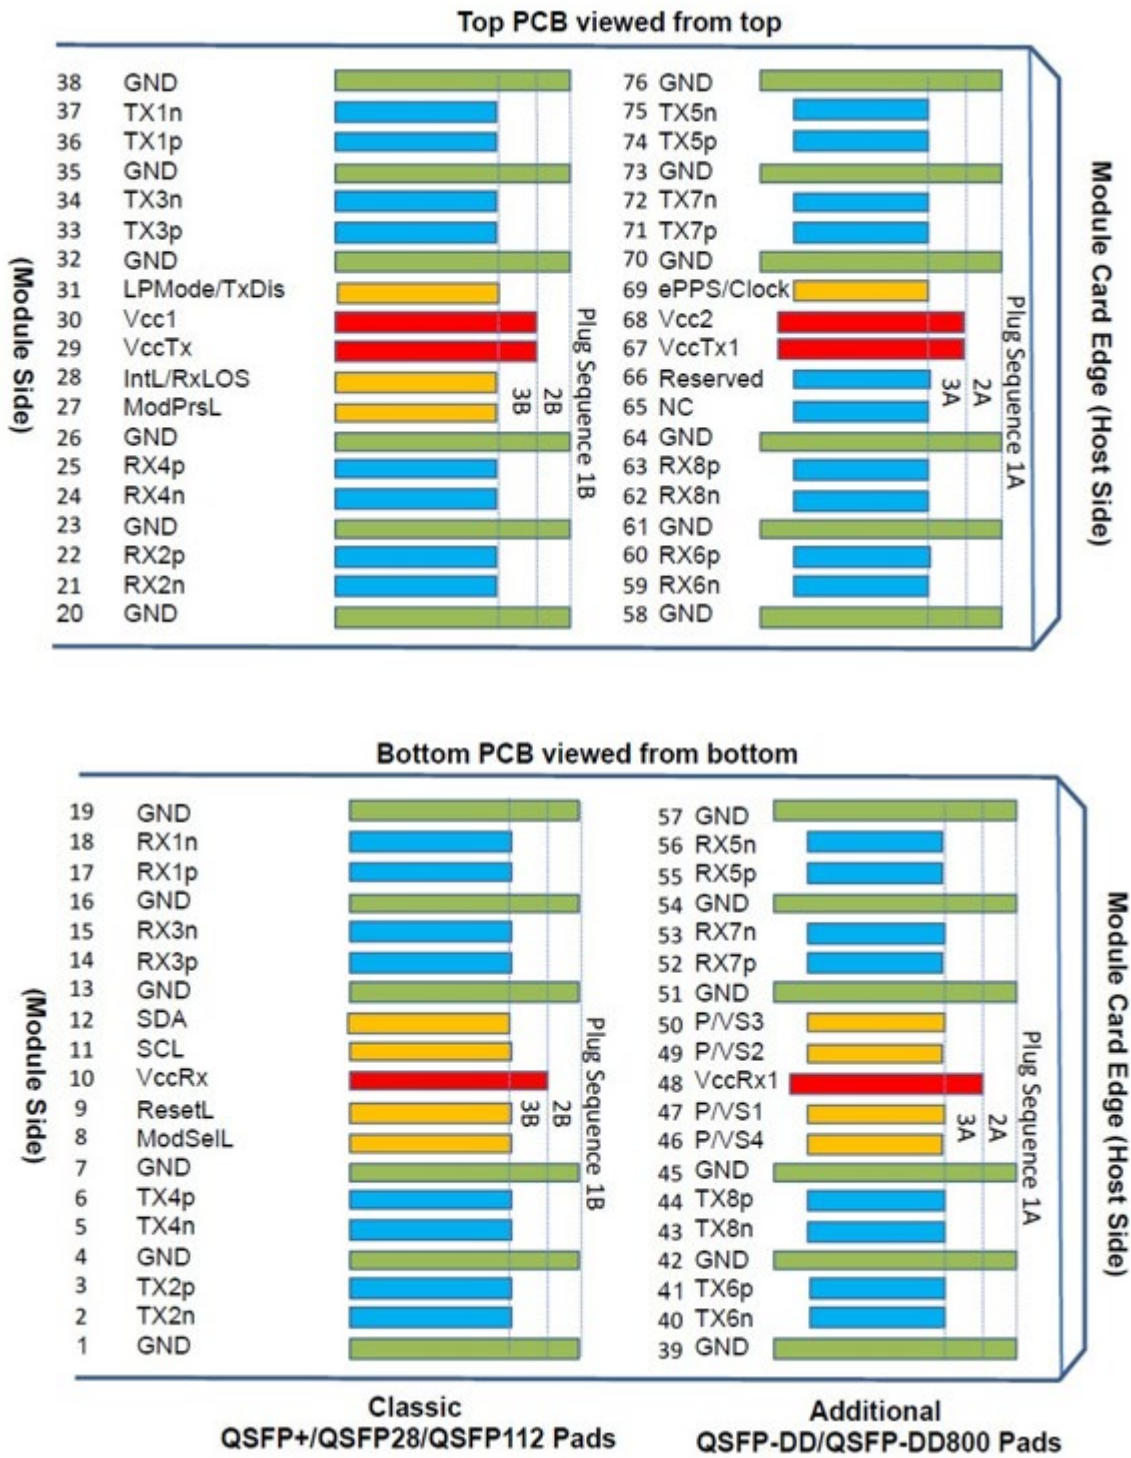

Recommended Host Board Schematic

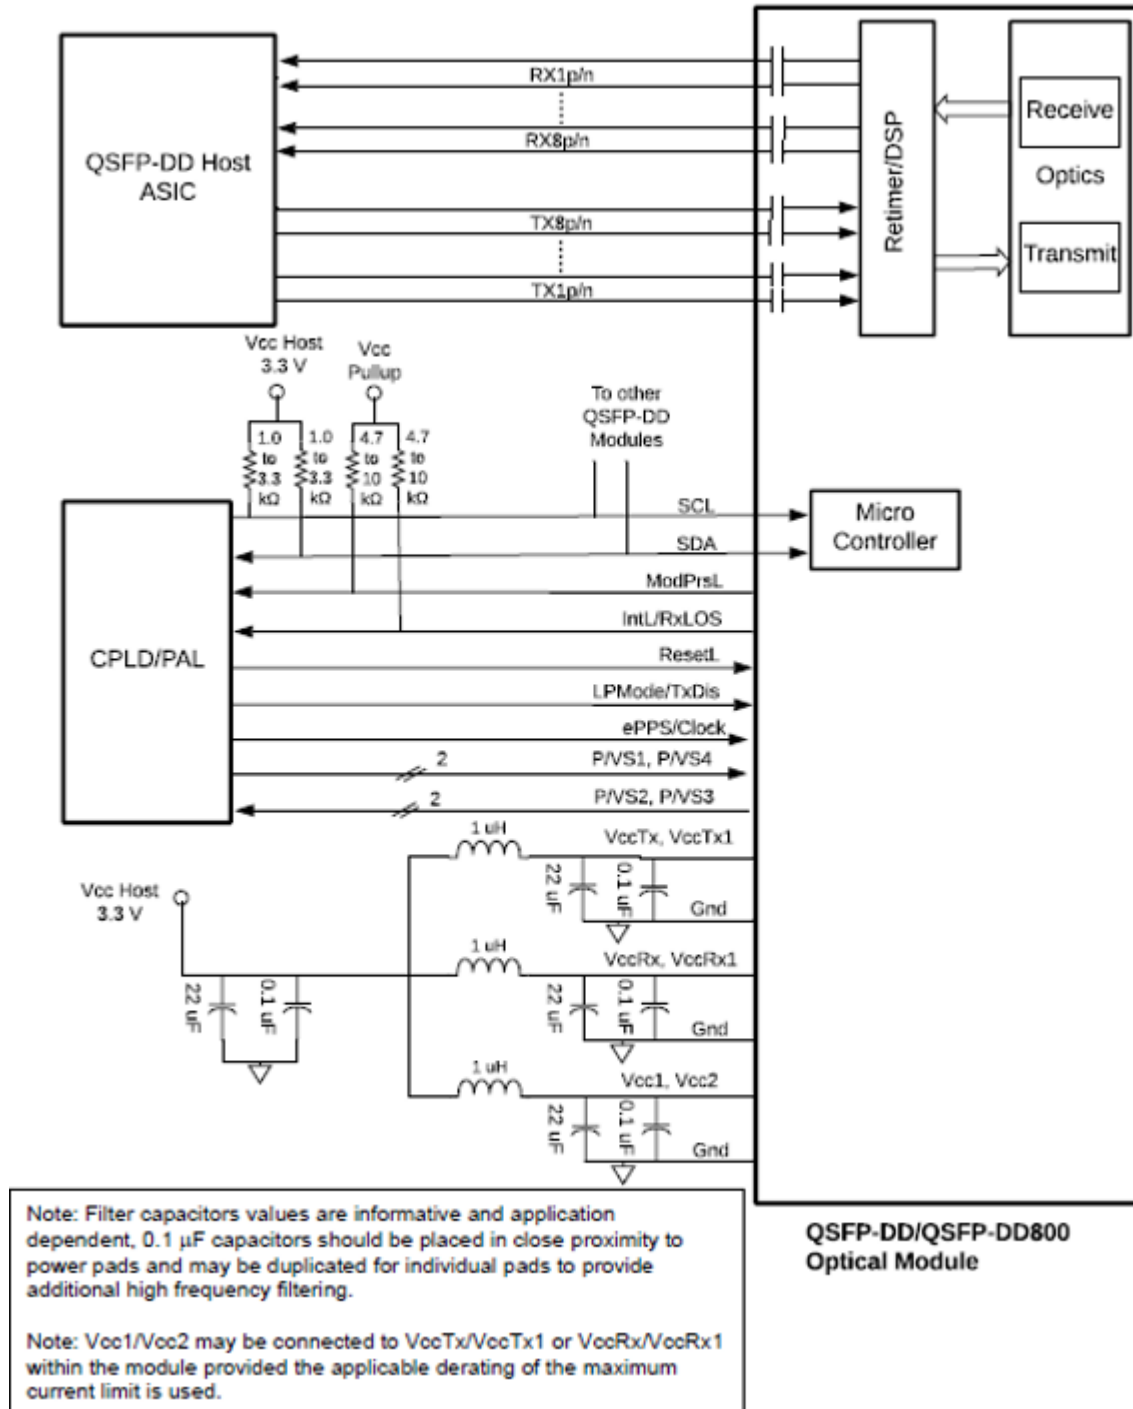

Mechanical Specifications

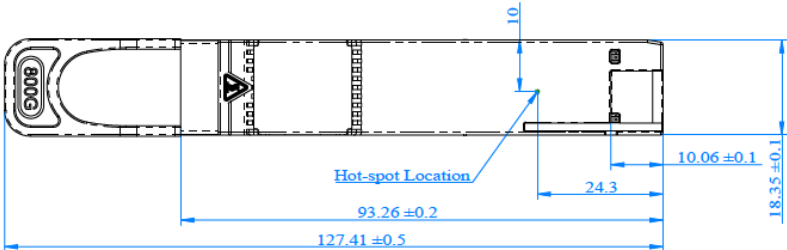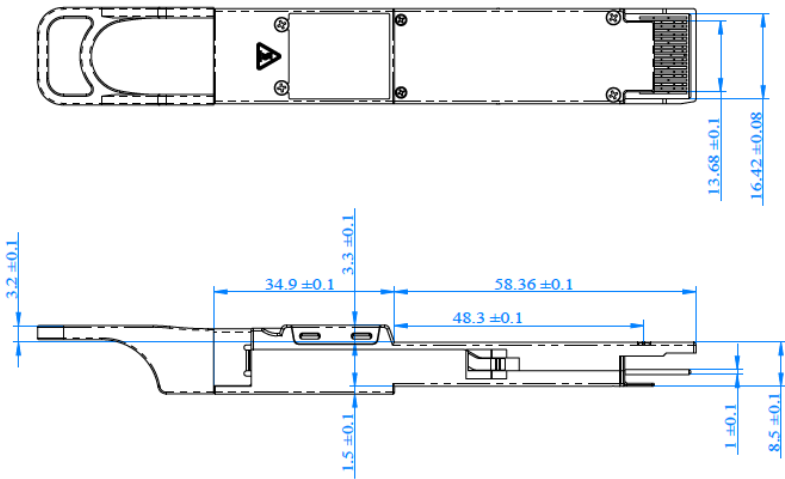

About Skylane Optics

Skylane is a leading provider of transceivers for optical communication.

We offer an extensive portfolio for the enterprise, access, datacenter and metropolitan fiber optical market as well as for smart home applications and home networks.

We cover the European, South American and North American market with a strong partner network and have offices in Belgium, Brazil, Sweden and USA.

Our offerings are characterized by high quality and performance. In combination with our strong technical support, we enable our customers to build cost optimized network solutions.

We offer an extensive range of high-quality products including transceivers (Optical and copper), Active Optical Cable (AOC), Direct Attach Cable (DAC), Mux/Demux, Coding Box.

