



## SFP-10GB-CW-47-100-J-SKY

Juniper Networks® Compatible Compliant 10GBase-CWDM SFP+ Transceiver (SMF, 1470nm, 100km, LC, DOM)

### Product Description

This Juniper Networks® Compatible SFP+ transceiver provides 10GBase-CWDM throughput up to 100km over single-mode fiber (SMF) using a wavelength of 1470nm via an LC connector. It is built to MSA standards and is uniquely serialized and data-traffic and application tested to ensure that they will integrate into your network seamlessly. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Skylane's transceivers are RoHS compliant and lead-free.

### Features:

- SFF-8432 and SFF-8472 Compliance
- Temperature-stabilized EML transmitter and PIN receiver
- Duplex LC Connector
- Commercial Temperature 0 to 70 Celsius
- Single-mode Fiber
- Hot Pluggable
- Excellent ESD Protection
- Metal with Lower EMI
- RoHS Compliant and Lead Free



### Applications:

- 10x Gigabit Ethernet over CWDM
- Access, Metro and Enterprise
- 8x/10x Fibre Channel
- Mobile Fronthaul CPRI/OBSAI

---

*For your product safety, please read the following information carefully before any manipulation of the transceiver:*



#### **ESD**

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



#### **LASER SAFETY**

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

*The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.*

---

### CWDM Available Wavelengths

| Wavelengths | Min. | Typ. | Max. |
|-------------|------|------|------|
| 47          | 1465 | 1471 | 1477 |
| 49          | 1485 | 1491 | 1497 |
| 51          | 1505 | 1511 | 1517 |
| 53          | 1525 | 1531 | 1537 |
| 55          | 1545 | 1551 | 1557 |

### Absolute Maximum Ratings

| Parameter                  | Symbol | Min. | Typ.    | Max.              | Unit |
|----------------------------|--------|------|---------|-------------------|------|
| Maximum Supply Voltage     | Vcc    | -0.5 |         | 4.0               | V    |
| Storage Temperature        | Tstg   | -40  |         | 85                | °C   |
| Operating Case Temperature | Tc     | 0    | 25      | 70                | °C   |
| Bit Error Rate             | BER    |      |         | 10 <sup>-12</sup> |      |
| Data Rate                  | DR     | 1.2  | 10.3125 | 11.3              | Gbps |

### Electrical Characteristics

| Parameter                           | Symbol  | Min. | Typ. | Max.     | Unit | Notes |
|-------------------------------------|---------|------|------|----------|------|-------|
| Power Supply Voltage                | Vcc     | 3.14 | 3.30 | 3.46     | V    |       |
| Power Supply Current                | Icc     |      |      | 550      | mA   | 1     |
| Power Consumption                   | PC      |      |      | 1.5      | W    |       |
| Transmitter                         |         |      |      |          |      |       |
| Input Differential Impedance        | RIN     |      | 100  |          | Ω    |       |
| Differential Data Input Swing       | VIN,pp  | 120  |      | 1200     | mV   |       |
| Transmit Disable Voltage            | VD      | 2    |      | Vcc      | V    |       |
| Transmit Enable Voltage             | VEN     | Vee  |      | Vee+0.8  | V    |       |
| Receiver                            |         |      |      |          |      |       |
| Differential Data Output Swing      | VOUT,pp | 640  |      | 1000     | mV   |       |
| Data Output Rise/Fall Time (20-80%) | Tr/Tf   | 28   |      |          | ps   |       |
| LOS Fault                           | VLOSA   | 2    |      | Host_Vcc | V    |       |
| LOS Normal                          | VLOSD   | Vee  |      | Vee+0.5  | V    |       |

### Notes:

1. For the electrical power interface.

## Optical Characteristics

| Parameter                       | Symbol             | Min. | Typ. | Max. | Unit  | Notes |
|---------------------------------|--------------------|------|------|------|-------|-------|
| Transmitter                     |                    |      |      |      |       |       |
| Output Optical Power            | P <sub>TX</sub>    | 1.5  |      | 4    | dBm   | 1     |
| Optical Center Wavelength       | $\lambda_C$        | 1465 | 1471 | 1477 | nm    |       |
| Extinction Ratio                | ER                 | 9    |      |      | dB    |       |
| Spectral Width (-20dB)          | $\Delta\lambda$    |      |      | 0.6  | nm    |       |
| Side-Mode Suppression Ratio     | SMSR               | 30   |      |      | dB    |       |
| Relative Intensity Noise        | RIN                |      |      | -128 | dB/Hz |       |
| Transmitter Dispersion Penalty  | TDP                |      |      | 4    | dB    |       |
| Transmitter Jitter              |                    |      |      |      |       | 2     |
| Launch Power of Off Transmitter | P <sub>off</sub>   |      |      | -30  | dBm   | 1     |
| Receiver                        |                    |      |      |      |       |       |
| Optical Center Wavelength       | $\lambda_C$        | 1260 |      | 1620 | nm    |       |
| Average Receive Power           | P <sub>RX</sub>    | -25  |      | -7   | dBm   |       |
| Receiver Sensitivity @10.3Gbps  | R <sub>X_SEN</sub> |      |      | -25  | dBm   | 1     |
| Receiver Reflectance            | T <sub>R_RX</sub>  |      |      | -27  | dB    |       |
| LOS Assert                      | LOSA               | -35  |      |      | dBm   |       |
| LOS De-Assert                   | LOSD               |      |      | -27  | dBm   |       |
| LOS Hysteresis                  | LOSH               | 0.5  |      |      | dB    |       |


## Pin Descriptions

| Pin | Symbol     | Name/Description                                                 | Notes |
|-----|------------|------------------------------------------------------------------|-------|
| 1   | VeeT       | Transmitter Ground (Common with Receiver Ground).                | 1     |
| 2   | Tx_Fault   | Transmitter Fault.                                               |       |
| 3   | Tx_Disable | Transmitter Disable. Laser output disabled on “high” or “open.”  | 2     |
| 4   | SDA        | 2-Wire Serial Interface Data.                                    | 3     |
| 5   | SCL        | 2-Wire Serial Interface Clock.                                   | 3     |
| 6   | MOD_ABS    | Module Absent. Grounded within the module.                       | 3     |
| 7   | RS0        | No Connection Required.                                          |       |
| 8   | LOS        | Loss of Signal Indication. “Logic 0” indicates normal operation. | 4     |
| 9   | RS1        | No Connection Required.                                          | 1     |
| 10  | VeeR       | Receiver Ground (Common with Transmitter Ground).                | 1     |
| 11  | VeeR       | Receiver Ground (Common with Transmitter Ground).                | 1     |
| 12  | RD-        | Receiver Inverted Data Out. AC Coupled.                          |       |
| 13  | RD+        | Receiver Non-Inverted Data Out. AC Coupled.                      |       |
| 14  | VeeR       | Receiver Ground (Common with Transmitter Ground).                | 1     |
| 15  | VccR       | Receiver Power Supply.                                           |       |
| 16  | VccT       | Transmitter Power Supply.                                        |       |
| 17  | VeeT       | Transmitter Ground (Common with Receiver Ground).                | 1     |
| 18  | TD+        | Transmitter Non-Inverted Data In. AC Coupled.                    |       |
| 19  | TD-        | Transmitter Inverted Data In. AC Coupled.                        |       |
| 20  | VeeT       | Transmitter Ground (Common with Receiver Ground).                | 1     |


### Notes:

1. The circuit ground is isolated from the chassis ground.
2. Disabled: TDIS>2V or open, enabled: TDIS<0.8V.
3. Should be pulled up with 4.7k $\Omega$  to 10k $\Omega$  on the host board to a voltage between 2V and 3.6V.
4. LOS is an open collector output.



## Electrical Pad Layout

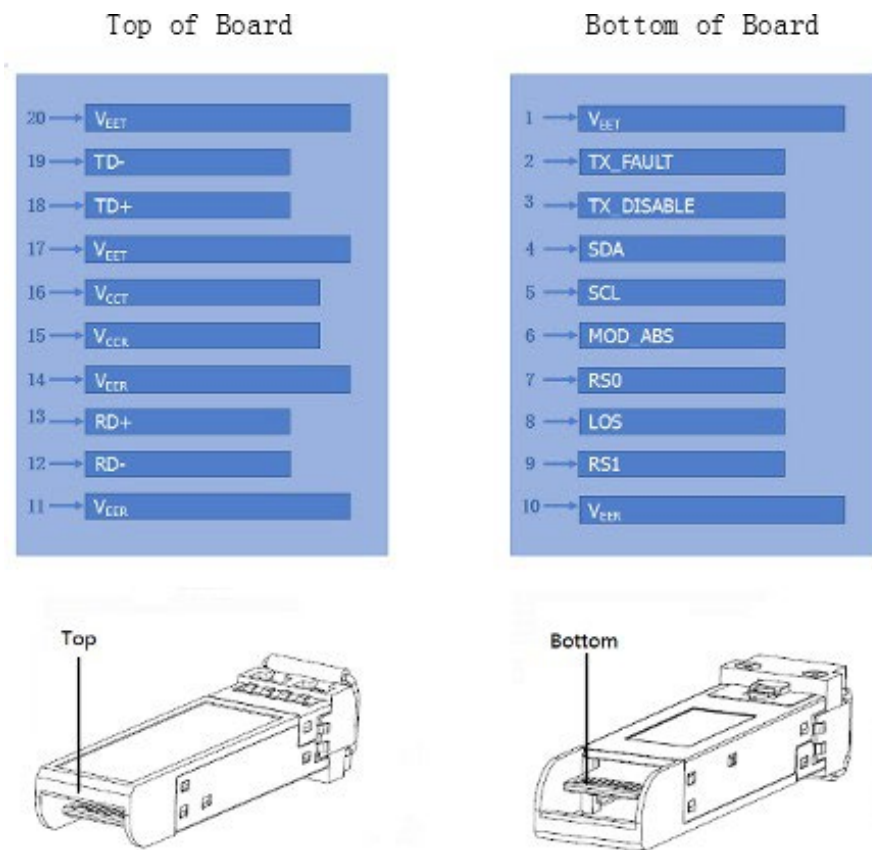

## Block Diagram of Transceiver

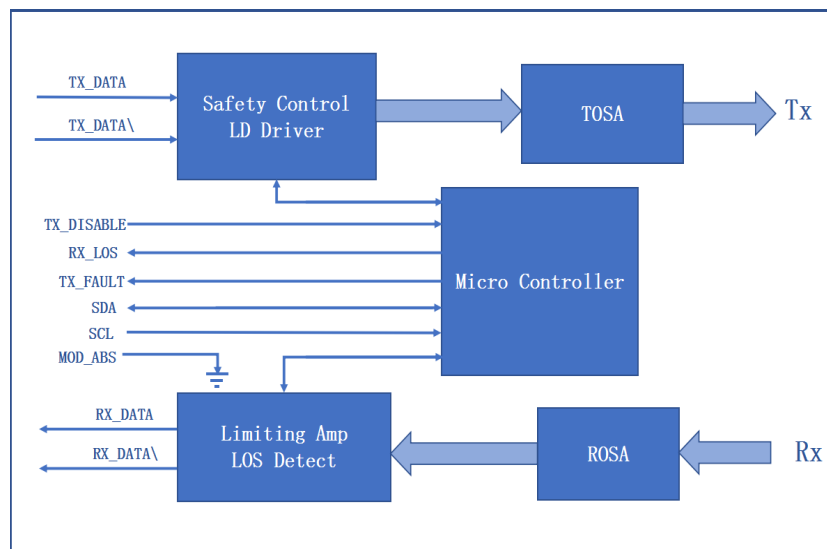

Mechanical Specifications

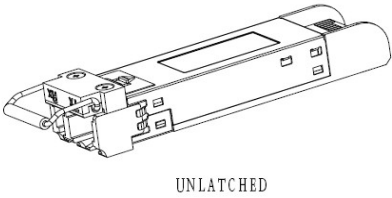

# About Skylane Optics

Skylane is a leading provider of transceivers for optical communication.

We offer an extensive portfolio for the enterprise, access, datacenter and metropolitan fiber optical market as well as for smart home applications and home networks.

We cover the European, South American and North American market with a strong partner network and have offices in Belgium, Brazil, Sweden and USA.

Our offerings are characterized by high quality and performance. In combination with our strong technical support, we enable our customers to build cost optimized network solutions.

We offer an extensive range of high-quality products including transceivers (Optical and copper), Active Optical Cable (AOC), Direct Attach Cable (DAC), Mux/Demux, Coding Box.

