



## SFP-10GBASE-ER31-N-SKY

Alcatel-Lucent Nokia® Compatible 10GBase-ER SFP+ Transceiver (SMF, 1310nm, 40km, LC, DOM)

### Product Description

This Alcatel-Lucent Nokia® compatible SFP+ transceiver provides 10GBase-ER throughput up to 40km over single-mode fiber (SMF) using a wavelength of 1310nm via an LC connector. It can operate at temperatures between 0 and 70C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with Alcatel-Lucent Nokia®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Skylane's transceivers are RoHS compliant and lead-free.

### Features:

- SFF-8432 and SFF-8472 Compliance
- Duplex LC Connector
- Commercial Temperature 0 to 70 Celsius
- Single-mode Fiber
- Hot Pluggable
- Excellent ESD Protection
- Metal with Lower EMI
- RoHS Compliant and Lead Free



### Applications:

- 10GBase Ethernet

---

*For your product safety, please read the following information carefully before any manipulation of the transceiver:*



#### **ESD**

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



#### **LASER SAFETY**

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

*The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.*

---

## Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4
- ESD to the LC Receptacle: compatible with IEC 61000-4-3
- EMI/EMC compatible with FCC Part 15 Subpart B Rules, EN55022:2010
- Laser Eye Safety compatible with FDA 21CFR, EN60950-1& EN (IEC) 60825-1,2
- RoHS compliant with EU RoHS 2.0 directive 2015/863/EU

## Absolute Maximum Ratings

| Parameter                  | Symbol | Min. | Typ.    | Max. | Unit |
|----------------------------|--------|------|---------|------|------|
| Maximum Supply Voltage     | Vcc    | -0.5 |         | 4.0  | V    |
| Storage Temperature        | TS     | -40  |         | 85   | °C   |
| Operating Case Temperature | Ti     | 0    | 25      | 70   | °C   |
| Data Rate                  |        |      | 10.3125 |      | Gbps |

## Electrical Characteristics (TOP=25°C, Vcc=3.3Volts)

| Parameter                        |                      | Symbol    | Min.  | Typ. | Max.    | Unit  | Notes |
|----------------------------------|----------------------|-----------|-------|------|---------|-------|-------|
| Power Supply Voltage             |                      | Vcc       | 3.135 | 3.3  | 3.465   | V     |       |
| Power Supply Current             |                      | Icc       |       |      | 300     | mA    |       |
| Power Dissipation                |                      | PD        |       |      | 1000    | mW    |       |
| Transmitter                      |                      |           |       |      |         |       |       |
| Input Differential Impedance     |                      | Zin       |       | 100  |         | Ω     |       |
| Differential Data Input Swing    |                      | Vin,p-p   | 180   |      | 700     | mVp-p |       |
| TX_FAULT                         | Transmitter Fault    | VOH       | 2.0   |      | Vcchost | V     |       |
|                                  | Normal Operation     | VOL       | 0     |      | 0.8     | V     |       |
| TX_DISABLE                       | Transmitter Disable  | VIH       | 2.0   |      | Vcchost | V     |       |
|                                  | Transmitter Enable   | VIL       | 0     |      | 0.8     | V     |       |
| Receiver                         |                      |           |       |      |         |       |       |
| Output Differential Impedance    |                      | Zo        |       | 100  |         | Ω     |       |
| Differential Data Output Swing   |                      | VOUT, P-P | 300   |      | 850     | mVp-p | 1     |
| Data Output Rise Time, Fall Time |                      | tr, tf    | 28    |      |         | ps    | 2     |
| RX_LOS                           | Loss of signal (LOS) | VOH       | 2.0   |      | Vcchost | V     | 3     |
|                                  | Normal Operation     | VOL       | 0     |      | 0.8     | V     | 3     |

### Notes:

1. Internally AC coupled, but requires an external 100Ω differential load termination.
2. 20-80%.
3. LOS is an open collector output. Should be pulled up with 4.7kΩ on the host board.

## Optical Characteristics

| Parameter                                | Symbol                                                  | Min. | Typ. | Max.  | Unit | Notes |
|------------------------------------------|---------------------------------------------------------|------|------|-------|------|-------|
| Transmitter                              |                                                         |      |      |       |      |       |
| Launch Optical Power                     | P <sub>o</sub>                                          | 0    |      | +5    | dBm  | 1     |
| Center Wavelength Range                  | λ <sub>c</sub>                                          | 1260 | 1310 | 1355  | nm   |       |
| Extinction Ratio                         | ER                                                      | 3.5  |      |       | dB   | 2     |
| Optical Modulation Amplitude             | OMA                                                     | -5.2 |      |       | dBm  |       |
| Spectral Width (-20dB)                   | Δλ                                                      |      |      | 1     | nm   |       |
| Side Mode Suppression Ratio              | SMSR                                                    | 30   |      |       | dB   |       |
| Transmitter and Dispersion Penalty       | TDP                                                     |      |      | 3.2   | dB   |       |
| Optical Return Loss Tolerance            | ORLT                                                    |      |      | 12    | dB   |       |
| P <sub>out</sub> @TX_Disable Asserted    | P <sub>off</sub>                                        |      |      | -30   | dBm  | 1     |
| Eye Diagram                              | IEEE Std 802.3-2005 10Gb Ethernet 10GBASE-ER compatible |      |      |       |      |       |
| Receiver                                 |                                                         |      |      |       |      |       |
| Center Wavelength                        | λ <sub>c</sub>                                          | 1260 | 1310 | 1355  | nm   |       |
| Receiver Sensitivity (P <sub>avg</sub> ) | S                                                       |      |      | -15   | dBm  | 3     |
| Receiver Overload (P <sub>avg</sub> )    | P <sub>OL</sub>                                         | 0.5  |      |       | dBm  | 3     |
| Stressed Sensitivity (OMA)               |                                                         |      |      | -10.3 | dBm  | 4     |
| Optical Return Loss                      | ORL                                                     | 12   |      |       | dB   |       |
| LOS De-Assert                            | LOS <sub>D</sub>                                        |      |      | -16   | dBm  |       |
| LOS Assert                               | LOS <sub>A</sub>                                        | -30  |      |       | dBm  |       |
| LOS Hysteresis                           |                                                         | 0.5  |      | 4.5   | dB   |       |

### Notes:


1. The optical power is launched into 9/125μm SMF.
2. Measured with a PRBS 2<sup>31</sup>-1 test pattern @10.3125Gbps
3. Measured with PRBS 2<sup>31</sup>-1 test pattern, 10.3125 Gb/s, BER<10<sup>-12</sup>.
4. Comply with IEEE 802.3-2005.

## Pin Descriptions

| Pin | Symbol     | Name/Descriptions                                                     | Ref. |
|-----|------------|-----------------------------------------------------------------------|------|
| 1   | VeeT       | Transmitter Ground                                                    | 1    |
| 2   | TX_Fault   | Transmitter Fault (LVTTL-O) - High indicates a fault condition        | 2    |
| 3   | TX_Disable | Transmitter Disable (LVTTL-I) – High or open disables the transmitter | 3    |
| 4   | SDA        | Two wire serial interface Data Line (LVCMOS-I/O) (MOD-DEF2)           | 4    |
| 5   | SCL        | Two wire serial interface Clock Line (LVCMOS-I/O) (MOD-DEF1)          | 4    |
| 6   | MOD_ABS    | Module Absent (Output), connected to VeeT or VeeR in the module       | 5    |
| 7   | RS0        | Rate Select 0 – Not used, Presents high input impedance               |      |
| 8   | RX_LOS     | Receiver Loss of Signal (LVTTL-O)                                     | 2    |
| 9   | RS1        | Rate Select 1 – Not used, Presents high input impedance               |      |
| 10  | VeeR       | Receiver Ground                                                       | 1    |
| 11  | VeeR       | Receiver Ground                                                       | 1    |
| 12  | RD-        | Inverse Received Data out (CML-O)                                     |      |
| 13  | RD+        | Received Data out (CML-O)                                             |      |
| 14  | VeeR       | Receiver Ground                                                       |      |
| 15  | VccR       | Receiver Power - +3.3V                                                |      |
| 16  | VccT       | Transmitter Power - +3.3 V                                            |      |
| 17  | VeeT       | Transmitter Ground                                                    | 1    |
| 18  | TD+        | Transmitter Data In (CML-I)                                           |      |
| 19  | TD-        | Inverse Transmitter Data In (CML-I)                                   |      |
| 20  | VeeT       | Transmitter Ground                                                    | 1    |

## Notes:

1. The module signal grounds are isolated from the module case.
2. This is an open collector/drain output that on the host board requires a 4.7K $\Omega$  to 10K $\Omega$  pull-up resistor to VccHost.
3. This input is internally biased high with a 4.7K $\Omega$  to 10K $\Omega$  pull-up resistor to VccT.
4. Two-Wire Serial interface clock and data lines require an external pull-up resistor dependent on the capacitance load.
5. This is a ground return that on the host board requires a 4.7K $\Omega$  to 10K $\Omega$  pull-up resistor to VccHost.

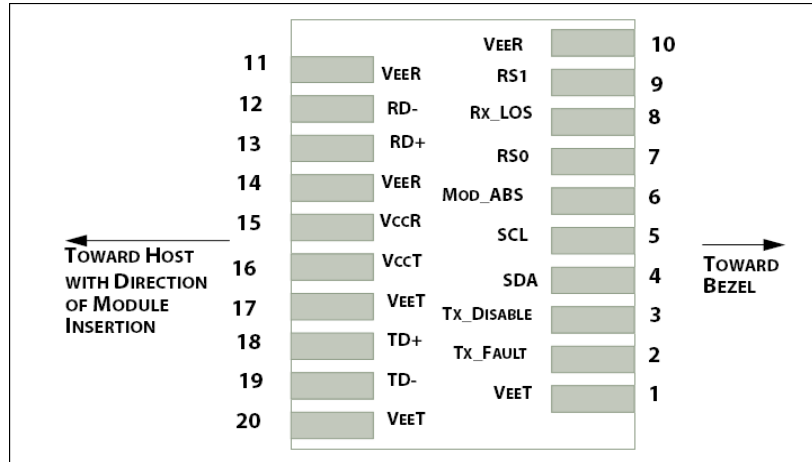

### Recommended Host Board Power Supply Filter Network


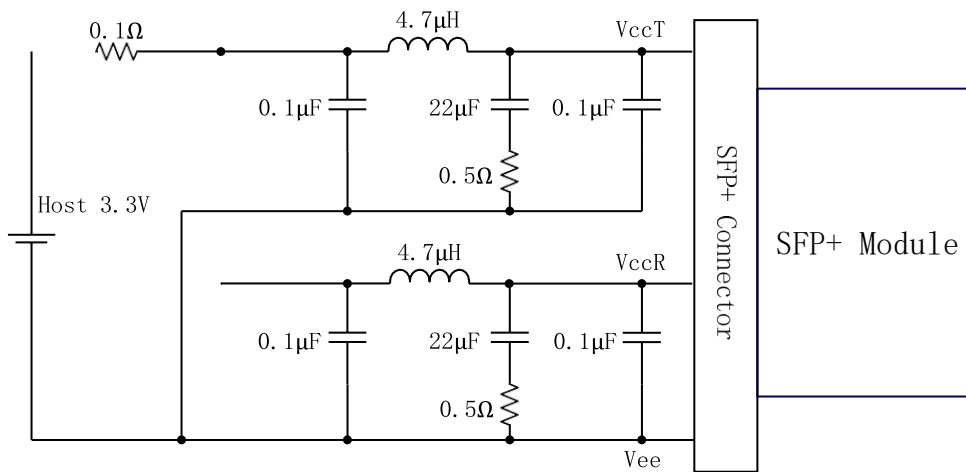



Figure 2. Recommended Host Board Power Supply Filter Network

Recommended Application Interface Block Diagram

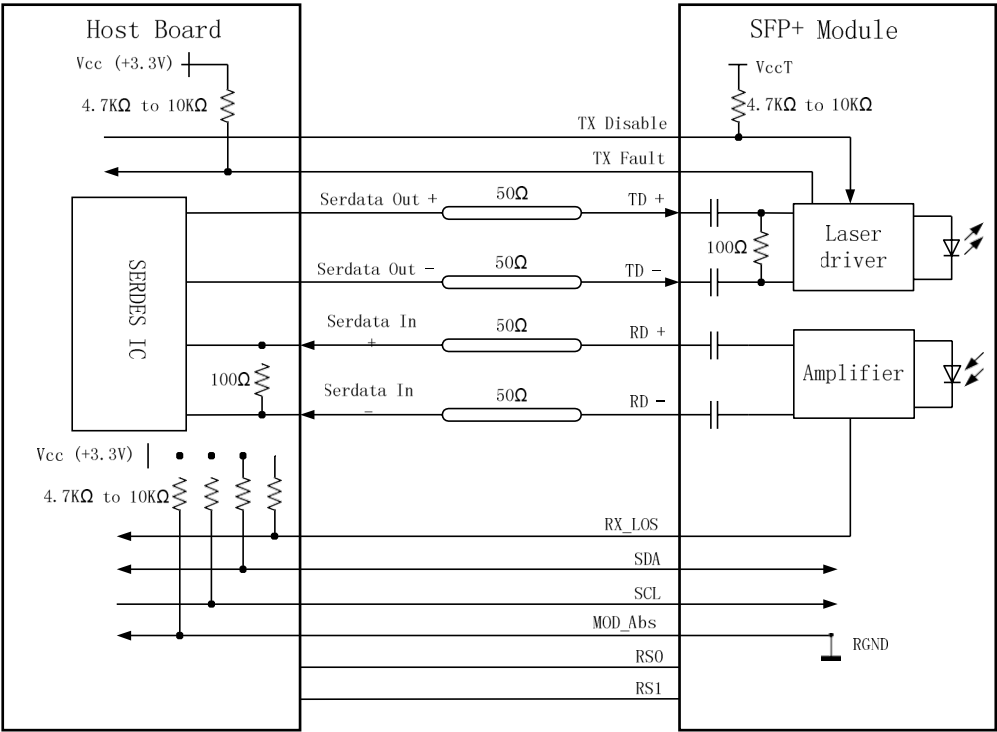

Mechanical Specifications

Small Form Factor Pluggable (SFP) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).

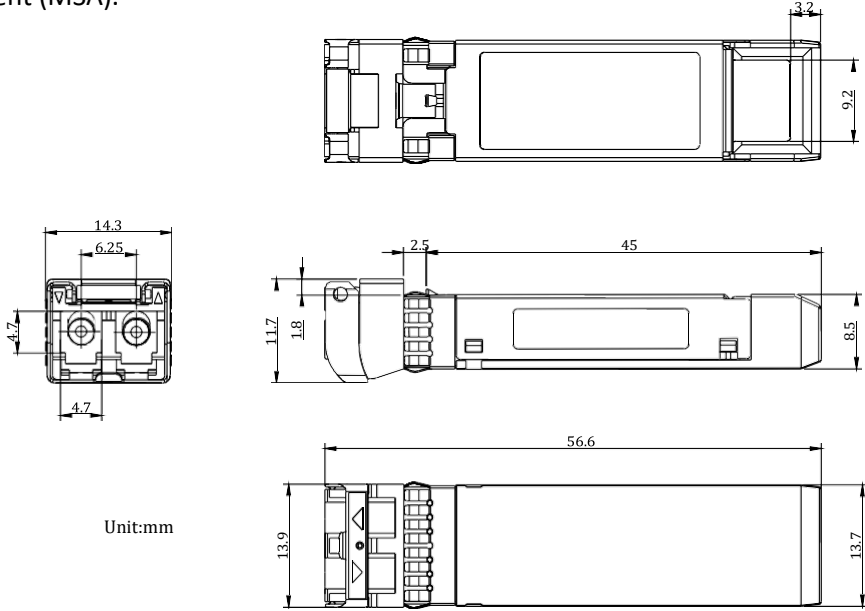

# About Skylane Optics

Skylane is a leading provider of transceivers for optical communication.

We offer an extensive portfolio for the enterprise, access, datacenter and metropolitan fiber optical market as well as for smart home applications and home networks.

We cover the European, South American and North American market with a strong partner network and have offices in Belgium, Brazil, Sweden and USA.

Our offerings are characterized by high quality and performance. In combination with our strong technical support, we enable our customers to build cost optimized network solutions.

We offer an extensive range of high-quality products including transceivers (Optical and copper), Active Optical Cable (AOC), Direct Attach Cable (DAC), Mux/Demux, Coding Box.

