



SKY-Q56AR2Q56MX-O1M

Arista Networks® A-Q200-Q200-1M to Mellanox® MFS1S50-H001V Compatible 200GBase-AOC QSFP56 to 2xQSFP56 Active Optical Cable (850nm, MMF, 1m, LSZH)

Product Description

This is an Arista Networks® A-Q200-Q200-1M to Mellanox® MFS1S50-H001V compatible 200GBase-AOC QSFP56 to 2xQSFP56 active optical cable that operates over multi-mode fiber with a maximum reach of 1.0m (3.3ft). At a wavelength of 850nm, it has been programmed, uniquely serialized, and data-traffic and application tested to ensure it is 100% compliant and functional. This active optical cable is built to comply with MSA (Multi-Source Agreement) standards. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Skylane's transceivers are RoHS compliant and lead-free.

Features:

- 200G QSFP56 Breakout to 2x 100G QSFP56 (Half-populated)
- Multi-rate capability: Up to 53.125Gbps PAM4 or 26.5625Gbps NRZ Per Channel
- Four-Channel Parallel Active Optical Cable
- Single 3.3V Power Supply
- 4x50G PAM4 Retimed 200GAUI-4 Electrical Interface (Half-populated on the 100G Ends)
- Low Power Dissipation: 4.5W per Cable End
- RoHS Compliant and Lead-Free
- Operating Temperature: 0 to 70 Celsius



Applications:

- 200GBase Ethernet
- InfiniBand HDR

For your product safety, please read the following information carefully before any manipulation of the transceiver:



ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

General Specifications

Parameter	Symbol	Min	Typ.	Max.	Unit	Notes
Storage Temperature	Tstg	-40		85	°C	1
Operating Case Temperature	Tc	0		70	°C	
Supply Voltage	Vcc	-0.5		4.0	V	
Relative Humidity (Non-Condensing)		15		85	%	
Aggregate Data Rate			212.5		Gbps	
Pre-FEC Bit Error Ratio	BER			10 ⁻⁶		2
Maximum Power Consumption per End				5 (Retimed Tx)	W	3
Data Rate Per Lane	DR	26.5625 ± 100ppm			Gbd	4

Notes:

1. Assumes no mechanical load force on the unit. Ensuring no mechanical load force requires a cable bend radius of >70 mm on the rest of the cable.
2. Tested with a PRBS 2³¹-1 test pattern.
3. Maximum total power value is specified across the full temperature and voltage range.
4. Supports InfiniBand HDR.

Electrical Specifications

Parameter	Symbol	Min	Typ.	Max.	Unit	Notes
Supply Voltage	Vcc	3.135	3.3	3.465	V	
Supply Current	Icc			1.59	A	
Power Consumption	P			4.5	W	1
Transmitter						
AC Common Mode Input Voltage Tolerance (RMS)				20	mV	
Differential Input Return Loss		Equation 27 Below			dB	2
Differential to Common Mode Reflection		Equation 28 Below			dB	2
Eye Hight Tolerance, with Tx CDR enabled				32	mV	3
Eye Width Tolerance, with Tx CDR enabled				0.2	UI	3
DC Common Mode Input Voltage Tolerance		-350		2850	mV	4
Receiver						
Bit Error Rate				9E-6		
AC Common-mode Output Voltage (RMS)				20	mV	
Differential Unsigned Output Voltage		450			mV	5
Near-end Eye Symmetry Mask Width		0.265			UI	6
Near-end Differential Eye Height		70			mV	
Far-end Eye Symmetry Mask Width		0.2			UI	

Far-end Differential Eye Height		30			mV	
Far-end Pre-cursor ISI Ratio		-7		4	%	
Common Mode Output Return Loss		-2			dB	
Differential Output Return Loss		Equation 27 Below			dB	
Common Mode to Differential Reflection		Equation 28 Below			dB	
Differential Termination Mismatch				10	%	
Transition Time (20% to 80%)		9.5			ps	7
DC Common Mode Voltage (minimum)		-350		2850	mV	4

Notes:

1. Maximum total power value is specified across the full temperature and voltage range.
2. Ref: InfiniBand Architecture Specification Volume 2 Release 1.4.
3. Ref: CEI-04 16.3.10.3.1.2.
4. Referred to Signal Ground.
5. Hit Ratio=5E-5 with 100Ω load.
6. Ref: 802.3 120E.4.2.
7. PRBS13Q, see 120E.3.1.5 for positions in the pattern.

Equation 27

$$(S_{DDxx}(f)) \leq \begin{pmatrix} -11, 0.05 \leq f < 26.5625/7.5 \\ -6.0 + 9.2 \cdot \log_{10}\left(\frac{15 \cdot f}{7 \cdot 26.5625}\right), 26.5625/7.5 \leq f \leq 26.5 \end{pmatrix}$$

Equation 28

$$(S_{CD11}, S_{DC22}(f)) \leq \begin{pmatrix} -25 + 20\left(\frac{f}{26.5625}\right), 0.05 \leq f < 26.5625/2 \\ -18 + 6\left(\frac{f}{26.5625}\right), 26.5625/2 \leq f < 26.5 \end{pmatrix}$$


Pin Descriptions

Pin	Symbol	Name/Description	Notes
1	GND	Module Ground.	1
2	Tx2-	Transmitter Inverted Data Input.	
3	Tx2+	Transmitter Non-Inverted Data Input.	
4	GND	Module Ground.	1
5	Tx4-	Transmitter Inverted Data Input.	
6	Tx4+	Transmitter Non-Inverted Data Input.	
7	GND	Module Ground.	1
8	ModSelL	Module Select.	
9	ResetL	Module Reset.	
10	VccRx	+3.3V Receiver Power Supply.	
11	SCL	2-Wire Serial Interface Clock.	
12	SDA	2-Wire Serial Interface Data.	
13	GND	Module Ground.	1
14	Rx3+	Receiver Non-Inverted Data Output.	
15	Rx3-	Receiver Inverted Data Output.	
16	GND	Module Ground.	1
17	Rx1+	Receiver Non-Inverted Data Output.	
18	Rx1-	Receiver Inverted Data Output.	
19	GND	Module Ground.	1
20	GND	Module Ground.	1
21	Rx2-	Receiver Inverted Data Output.	
22	Rx2+	Receiver Non-Inverted Data Output.	
23	GND	Module Ground.	1
24	Rx4-	Receiver Inverted Data Output.	
25	Rx4+	Receiver Non-Inverted Data Output.	
26	GND	Module Ground.	1
27	ModPrsL	Module Present.	
28	IntL	Interrupt.	
29	VccTx	+3.3V Transmitter Power Supply.	
30	Vcc1	+3.3V Power Supply.	
31	LPMODE	Low-Power Mode.	
32	GND	Module Ground.	1
33	Tx3+	Transmitter Non-Inverted Data Input.	
34	Tx3-	Transmitter Inverted Data Input.	
35	GND	Module Ground.	1


36	Tx1+	Transmitter Non-Inverted Data Input.	
37	Tx1-	Transmitter Inverted Data Input.	
38	GND	Module Ground.	1

Notes:

1. Circuit ground is internally isolated from chassis ground.

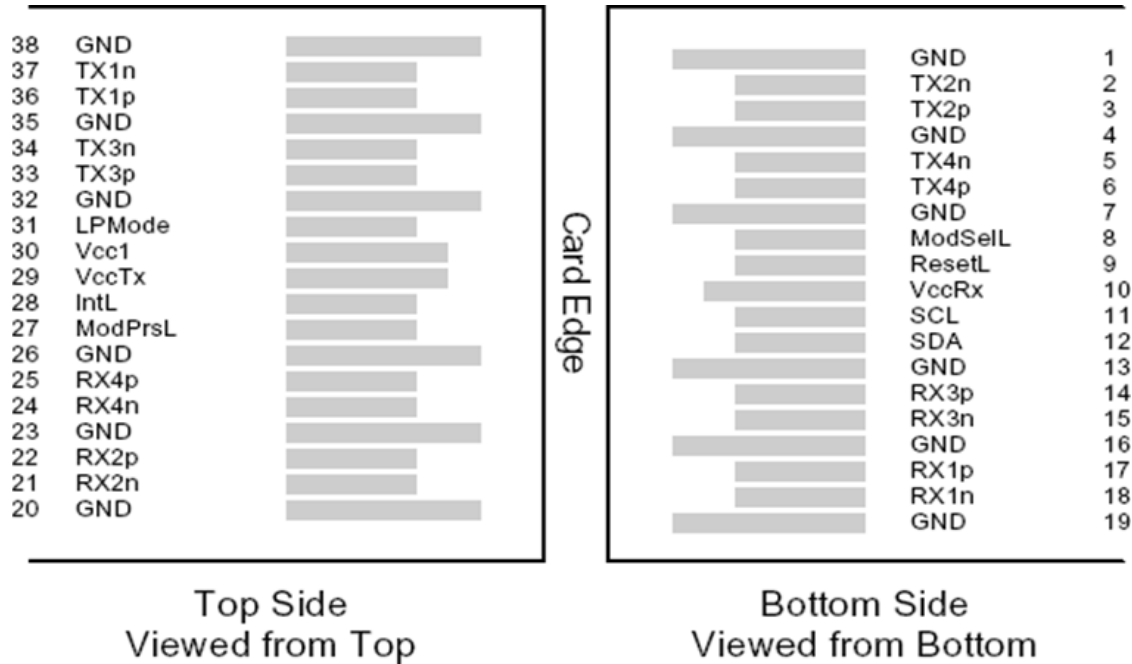

Mechanical Specifications

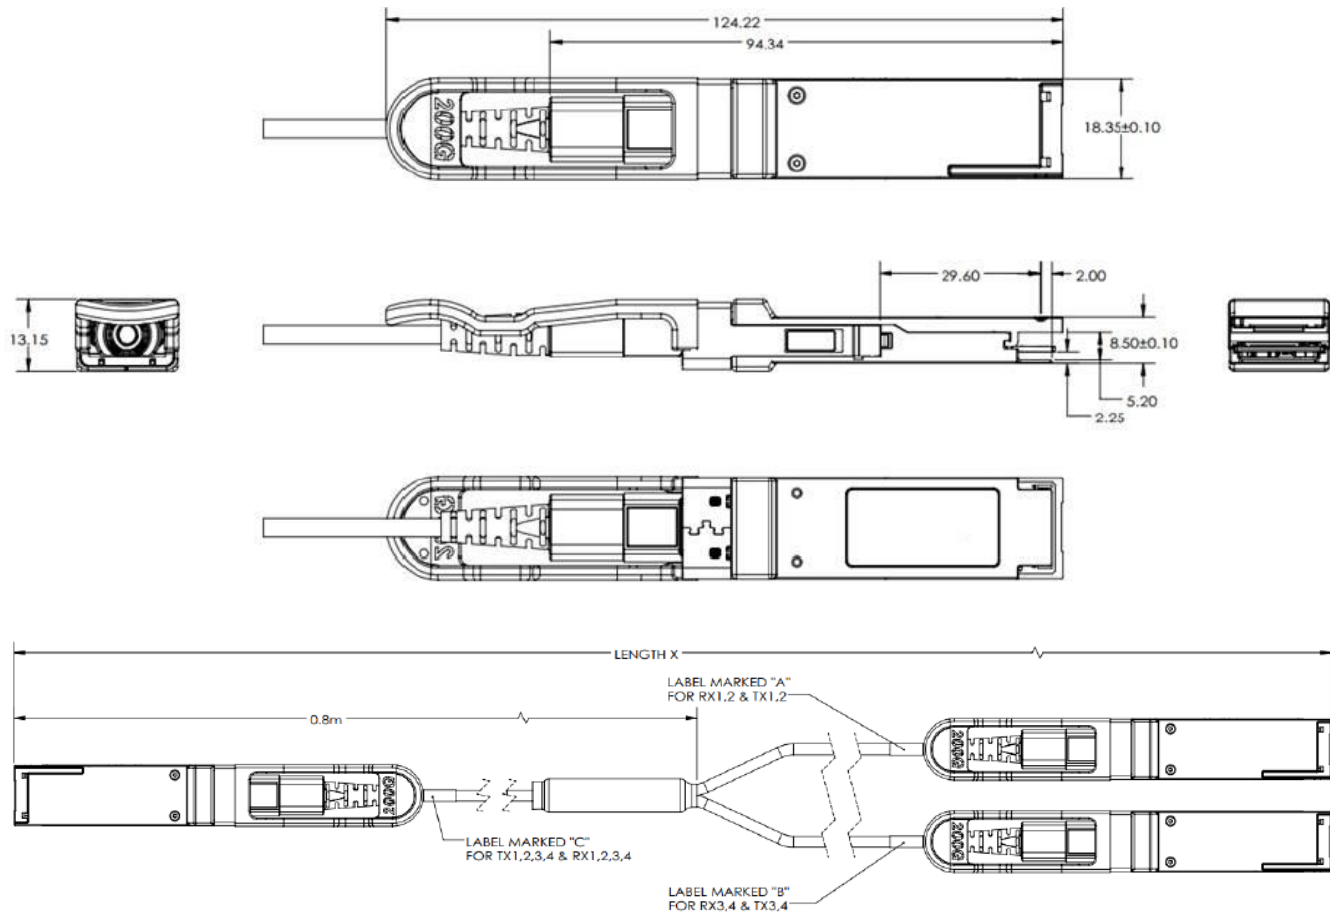

Active Optical Cable Dimensions

Mark "C"	Fiber	Mark "A"	Mark "B"
RX1	8	TX1	TX3
RX2	7	TX2	TX4
RX3	6	-	-
RX4	5	-	-
-	Fake Fiber	-	-
-	Fake Fiber	-	-
-	Fake Fiber	-	-
-	Fake Fiber	-	-
TX4	4	-	-
TX3	3	-	-
TX2	2	RX2	RX4
TX1	1	RX1	RX3

About Skylane Optics

Skylane is a leading provider of transceivers for optical communication.

We offer an extensive portfolio for the enterprise, access, datacenter and metropolitan fiber optical market as well as for smart home applications and home networks.

We cover the European, South American and North American market with a strong partner network and have offices in Belgium, Brazil, Sweden and USA.

Our offerings are characterized by high quality and performance. In combination with our strong technical support, we enable our customers to build cost optimized network solutions.

We offer an extensive range of high-quality products including transceivers (Optical and copper), Active Optical Cable (AOC), Direct Attach Cable (DAC), Mux/Demux, Coding Box.

