



## SPD41040160C266

Brocade® (Formerly) Compatible 16GBase-DWDM FC SFP+ Transceiver C-Band 100GHz (SMF, 1544.53nm, 40km, LC, DOM)

### Product Description

This Brocade® (Formerly) Compatible SFP+ transceiver provides 16GBase-DWDM Fibre Channel throughput up to 40km over single-mode fiber (SMF) using a wavelength of 1544.53nm via an LC connector. It is guaranteed to be 100% compatible with the equivalent Brocade® (Formerly) transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Skylane's transceivers are RoHS compliant and lead-free.

### Features:

- SFF-8432 and SFF-8472 Compliance
- Cooled EML transmitter and PIN receiver
- Duplex LC Connector
- Commercial Temperature 0 to 70 Celsius
- Hot Pluggable
- Single-mode Fiber
- Excellent ESD Protection
- Metal with Lower EMI
- RoHS Compliant and Lead Free



### Applications:

- 16x Gigabit Ethernet over DWDM
- Access, Metro and Enterprise
- 8x/10x Fibre Channel

---

*For your product safety, please read the following information carefully before any manipulation of the transceiver:*



#### ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



#### LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

*The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.*

---

### Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4.
- ESD to the LC Receptacle: compatible with IEC 61000-4-3.
- EMI/EMC: compatible with FCC Part 15 Subpart B Rules, EN55022:2010.
- Laser Eye Safety: compatible with FDA 21CFR, EN60950-1& EN (IEC) 60825-1, 2.
- RoHS: compliant with EU RoHS 2.0 directive 2015/863/EU.

### Wavelength Guide (100GHz ITU-T Channel)

| Channel # | Frequency (THz) | Center Wavelength (nm) |
|-----------|-----------------|------------------------|
| 17        | 191.7           | 1563.86                |
| 18        | 191.8           | 1563.05                |
| 19        | 191.9           | 1562.23                |
| 20        | 192.0           | 1561.42                |
| 21        | 192.1           | 1560.61                |
| 22        | 192.2           | 1559.79                |
| 23        | 192.3           | 1558.98                |
| 24        | 192.4           | 1558.17                |
| 25        | 192.5           | 1557.36                |
| 26        | 192.6           | 1556.55                |
| 27        | 192.7           | 1555.75                |
| 28        | 192.8           | 1554.94                |
| 29        | 192.9           | 1554.13                |
| 30        | 193.0           | 1553.33                |
| 31        | 193.1           | 1552.52                |
| 32        | 193.2           | 1551.72                |
| 33        | 193.3           | 1550.92                |
| 34        | 193.4           | 1550.12                |
| 35        | 193.5           | 1549.32                |
| 36        | 193.6           | 1548.51                |
| 37        | 193.7           | 1547.72                |
| 38        | 193.8           | 1546.92                |
| 39        | 193.9           | 1546.12                |
| 40        | 194.0           | 1545.32                |
| 41        | 194.1           | 1544.53                |
| 42        | 194.2           | 1543.73                |
| 43        | 194.3           | 1542.94                |
| 44        | 194.4           | 1542.14                |

|    |       |         |
|----|-------|---------|
| 45 | 194.5 | 1541.35 |
| 46 | 194.6 | 1540.56 |
| 47 | 194.7 | 1539.77 |
| 48 | 194.8 | 1538.98 |
| 49 | 194.9 | 1538.19 |
| 50 | 195.0 | 1537.40 |
| 51 | 195.1 | 1536.61 |
| 52 | 195.2 | 1535.82 |
| 53 | 195.3 | 1535.04 |
| 54 | 195.4 | 1534.25 |
| 55 | 195.5 | 1533.47 |
| 56 | 195.6 | 1532.68 |
| 57 | 195.7 | 1531.90 |
| 58 | 195.8 | 1531.12 |
| 59 | 195.9 | 1530.33 |
| 60 | 196.0 | 1529.55 |
| 61 | 196.1 | 1528.77 |

#### Absolute Maximum Ratings

| Parameter                  | Symbol           | Min. | Typ.   | Max. | Unit | Notes |
|----------------------------|------------------|------|--------|------|------|-------|
| Maximum Supply Voltage     | V <sub>cc</sub>  | -0.5 |        | 4.5  | V    |       |
| Storage Temperature        | T <sub>stg</sub> | -40  |        | 85   | °C   |       |
| Operating Case Temperature | T <sub>c</sub>   | 0    |        | 70   | °C   |       |
| Operating Humidity         | RH               | 5    |        | 95   | %    |       |
| Data Rate                  | BR               | 4.25 | 14.025 |      | Gbps |       |

## Electrical Characteristics

| Parameter                      |         | Symbol           | Min.  | Typ. | Max.            | Unit | Notes |
|--------------------------------|---------|------------------|-------|------|-----------------|------|-------|
| Power Supply Voltage           |         | V <sub>CC</sub>  | 3.135 | 3.30 | 3.465           | V    |       |
| Power Supply Current           |         | I <sub>CC</sub>  |       |      | 550             | mA   |       |
| Transmitter                    |         |                  |       |      |                 |      |       |
| Differential Data Input Swing  |         | V <sub>IN</sub>  | 180   |      | 850             | mV   | 1     |
| Input Differential Impedance   |         | Z <sub>IN</sub>  | 90    | 100  | 110             | Ω    |       |
| Tx_Disable                     | Disable | V <sub>IH</sub>  | 2.0   |      | V <sub>CC</sub> | V    |       |
|                                | Enable  | V <sub>IL</sub>  | 0     |      | 0.8             | V    |       |
| Tx_Fault                       | Fault   | V <sub>OH</sub>  | 2.0   |      | V <sub>CC</sub> | V    |       |
|                                | Normal  | V <sub>OL</sub>  | 0     |      | 0.8             | V    |       |
| Receiver                       |         |                  |       |      |                 |      |       |
| Differential Data Output Swing |         | V <sub>OUT</sub> | 300   |      | 900             | mV   | 2     |
| LOS                            | High    |                  | 2.0   |      | V <sub>CC</sub> | V    |       |
|                                | Low     |                  |       |      | 0.8             | V    |       |

### Notes:

1. PECL input. Internally AC-coupled and terminated.
2. Internally AC-coupled.

## Optical Characteristics

| Parameter                   |  | Symbol         | Min.    | Typ. | Max.    | Unit | Notes |
|-----------------------------|--|----------------|---------|------|---------|------|-------|
| Transmitter                 |  |                |         |      |         |      |       |
| Center Wavelength           |  | λ <sub>C</sub> | 1528.77 |      | 1563.86 | nm   |       |
| Spectral Width (-20dB)      |  | Δλ             |         |      | 1       | nm   |       |
| Side-Mode Suppression Ratio |  | SMSR           | 30      |      |         | dB   |       |
| Average Output Power        |  | POUT           | -1      |      | 3       | dBm  | 1     |
| Extinction Ratio            |  | ER             | 8.2     |      |         | dB   |       |
| Receiver                    |  |                |         |      |         |      |       |
| Center Wavelength           |  | λ <sub>C</sub> | 1260    |      | 1620    | nm   |       |
| Receiver Sensitivity        |  | S              |         |      | -14     | dBm  | 2     |
| Receiver Overload           |  | POL            | 0.5     |      |         | dBm  | 2     |
| LOS De-Assert               |  | LOSD           |         |      | -15     | dBm  |       |
| LOS Assert                  |  | LOSA           | -28     |      |         | dBm  |       |
| LOS Hysteresis              |  | LOSH           | 0.5     |      |         | dB   |       |

**Notes:**

1. The optical power is launched into the SMF.
2. Measured with a PRBS 2<sup>31</sup>-1 test pattern @14025Mbps, BER ≤1×10<sup>-12</sup>.

**Timing and Electrical Specifications**

| Parameter                                      | Symbol         | Min. | Typ. | Max.            | Unit |
|------------------------------------------------|----------------|------|------|-----------------|------|
| Tx_Negate Time                                 | T_on           |      |      | 2               | ms   |
| Tx_Disable Assert Time                         | T_off          |      |      | 100             | μs   |
| Time To Initialize Including Reset of Tx_Fault | T_init         |      |      | 300             | ms   |
| Tx_Fault Assert Time                           | T_fault        |      |      | 100             | μs   |
| Tx_Disable To Reset                            | T_reset        | 10   |      |                 | μs   |
| LOS Assert Time                                | T_loss_on      |      |      | 100             | μs   |
| LOS De-Assert Time                             | T_loss_off     |      |      | 100             | μs   |
| Serial ID Clock Rate                           | T_serial_clock |      | 100  | 400             | KHz  |
| MOD_DEF (0:2) - High                           | VOH            | 2    |      | V <sub>cc</sub> | V    |
| MOD_DEF (0:2) - Low                            | VOL            |      |      | 0.8             | V    |


**Pin Descriptions**

| Pin | Symbol     | Name/Descriptions                                                          | Ref. |
|-----|------------|----------------------------------------------------------------------------|------|
| 1   | VeeT       | Transmitter Ground (Common with Receiver Ground).                          | 1    |
| 2   | Tx_Fault   | Transmitter Fault. LVTTTL-O.                                               | 2    |
| 3   | Tx_Disable | Transmitter Disable. Laser output disabled on “high” or “open.” LVTTT-I.   | 3    |
| 4   | SDA        | 2-Wire Serial Interface Data (Same as MOD-DEF2 in INF-8074i). LVTTTL-I/O.  |      |
| 5   | SCL        | 2-Wire Serial Interface Clock (Same as MOD-DEF2 in INF-8074i). LVTTTL-I.   |      |
| 6   | MOD_ABS    | Module Absent. Connect to VeeT or VeeR in the module.                      | 4    |
| 7   | RS0        | Rate Select 0. Not Used.                                                   | 5    |
| 8   | LOS        | Loss of Signal Indication. “Logic 0” indicates normal operation. LVTTTL-O. | 2    |
| 9   | RS1        | Rate Select 1. Not Used.                                                   | 5    |
| 10  | VeeR       | Receiver Ground (Common with Transmitter Ground).                          | 1    |
| 11  | VeeR       | Receiver Ground (Common with Transmitter Ground).                          | 1    |
| 12  | RD-        | Receiver Inverted Data Out. AC Coupled. CML-O.                             |      |
| 13  | RD+        | Receiver Non-Inverted Data Out. AC Coupled. CML-O.                         |      |
| 14  | VeeR       | Receiver Ground (Common with Transmitter Ground).                          | 1    |
| 15  | VccR       | Receiver Power Supply.                                                     |      |
| 16  | VccT       | Transmitter Power Supply.                                                  |      |

|    |      |                                                      |   |
|----|------|------------------------------------------------------|---|
| 17 | VeeT | Transmitter Ground (Common with Receiver Ground).    | 1 |
| 18 | TD+  | Transmitter Non-Inverted Data In. AC Coupled. CML-I. |   |
| 19 | TD-  | Transmitter Inverted Data In. AC Coupled. CML-O.     |   |
| 20 | VeeT | Transmitter Ground (Common with Receiver Ground).    | 1 |


**Notes:**

1. The module signal ground contacts, VeeR and VeeT, should be isolated from the module case.
2. This contact is an open collector/drain output and should be pulled up to the Host\_Vcc with resistor in the range 4.7kΩ to 10kΩ. Pull-ups can be connected to one or several power supplies; however, the host board design shall ensure that no module contract has voltage exceeding module VccT/R+0.5V.
3. Tx\_Disable is an input contact with a 4.7kΩ to 10kΩ pull-up resistor to VccT inside the module.
4. MOD\_ABS is connected to VeeT or VeeR in the SFP+ module. The host may pull the contract up to Host\_Vcc with a resistor in the range from 4.7kΩ to 10kΩ. MOD\_ABS is asserted “High” when the SFP+ module is physically absent from a host slot.
5. Internally pulled down per SFF-8431.

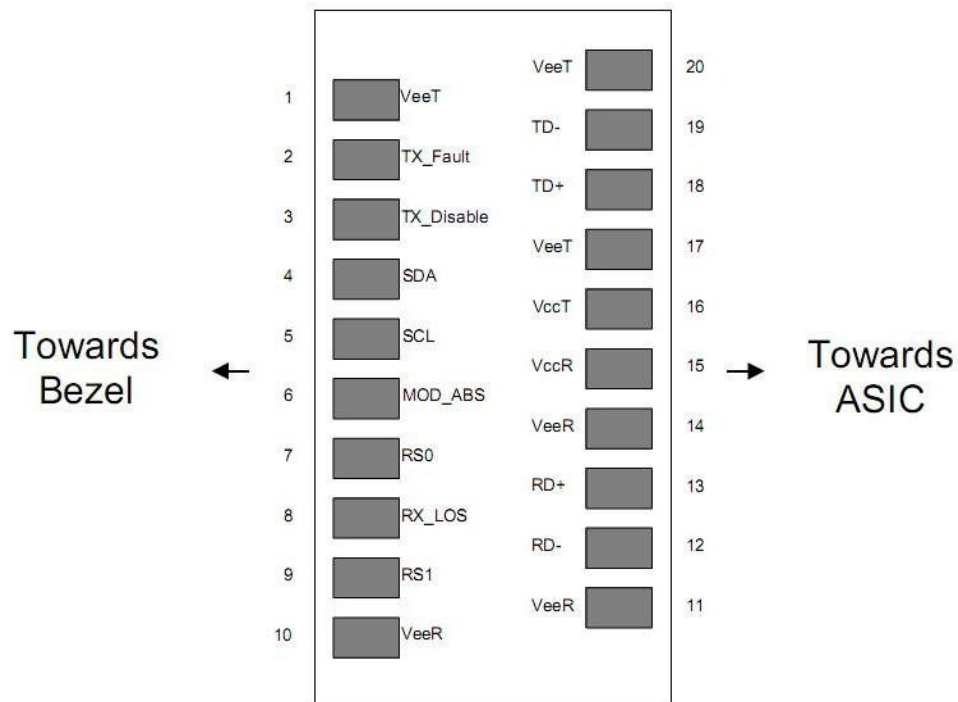


Pin-Out of Connector Block on the Host Board


## Transceiver Functional Diagram

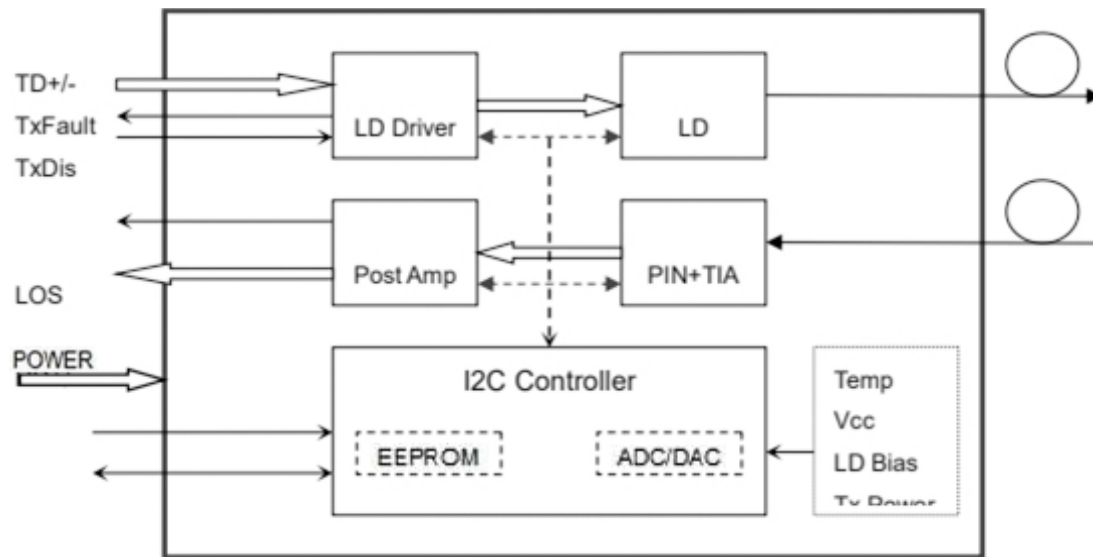

## Recommended Interface Circuit Schematic

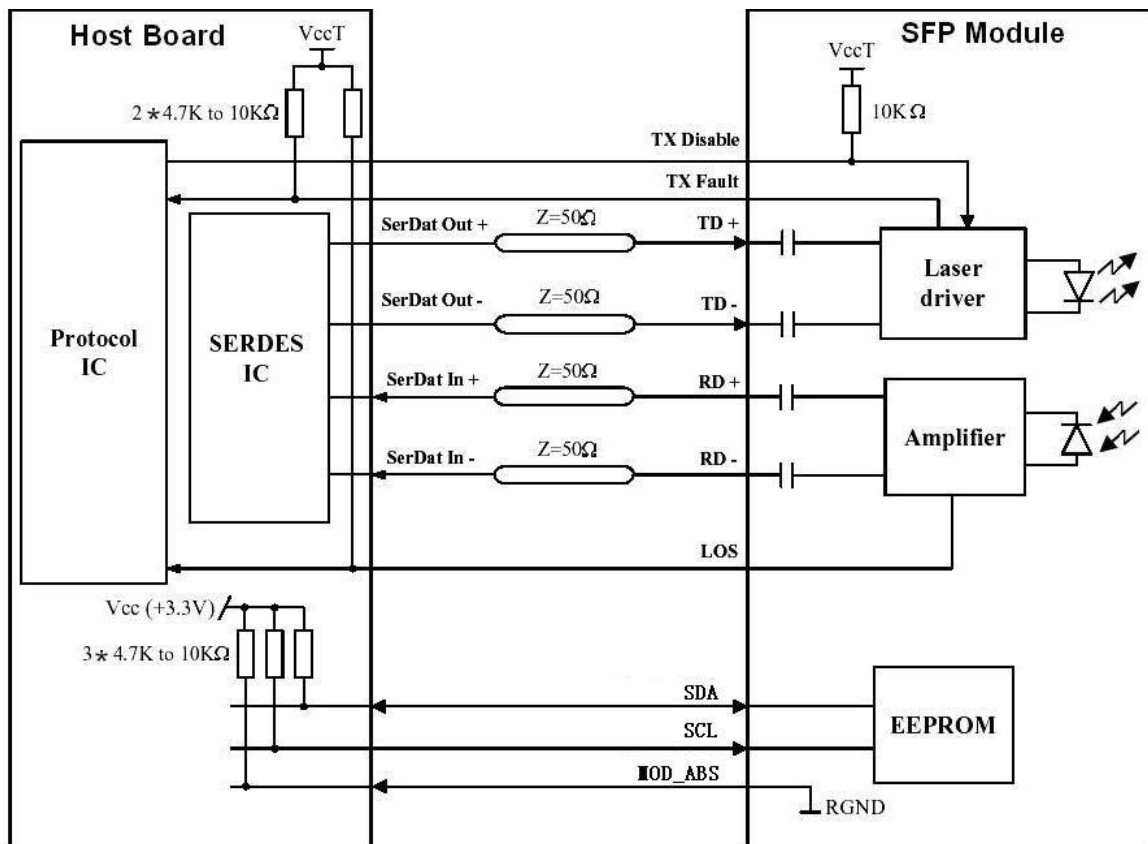

Mechanical Specifications

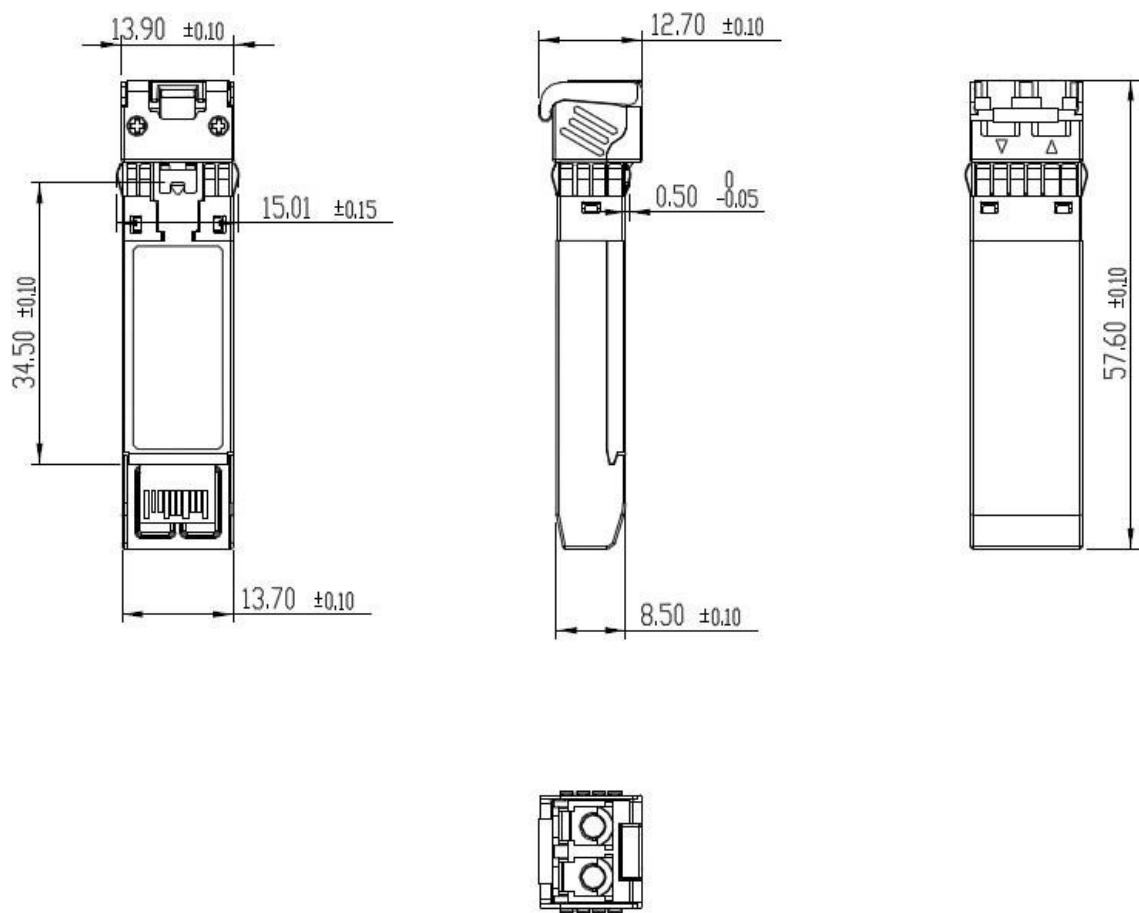

EEPROM Information

EEPROM memory map-specific data field description is as below:

| 2 wire address 1010000X (A0h) |                                         | 2 wire address 1010001X (A2h) |                                           |
|-------------------------------|-----------------------------------------|-------------------------------|-------------------------------------------|
| 0                             | Serial ID Defined by SFP MSA (96 bytes) | 0                             | Alarm and Warning Thresholds (56 bytes)   |
| 95                            |                                         | 55                            | Cal Constants (40 bytes)                  |
| 127                           |                                         | 95                            | Real Time Diagnostic Interface (24 bytes) |
|                               | Vendor Specific (32 bytes)              | 119                           | Vendor Specific (8 bytes)                 |
| 255                           |                                         | 127                           | User Writable EEPROM (120 bytes)          |
|                               | Reserved, SFF8079 (128 bytes)           | 247                           |                                           |
|                               |                                         | 255                           | Vendor Specific (8 bytes)                 |



# About Skylane Optics

Skylane is a leading provider of transceivers for optical communication.

We offer an extensive portfolio for the enterprise, access, datacenter and metropolitan fiber optical market as well as for smart home applications and home networks.

We cover the European, South American and North American market with a strong partner network and have offices in Belgium, Brazil, Sweden and USA.

Our offerings are characterized by high quality and performance. In combination with our strong technical support, we enable our customers to build cost optimized network solutions.

We offer an extensive range of high-quality products including transceivers (Optical and copper), Active Optical Cable (AOC), Direct Attach Cable (DAC), Mux/Demux, Coding Box.

