

## SKY-Q28DEQ28IN-P2M

Dell® to Intel® Compatible 100GBase-CU QSFP28 to QSFP28 Direct Attach Cable (Passive Twinax, 2m)

### Product Description

This Dell® to Intel® compatible 100GBase-CU QSFP28 to QSFP28 passive direct attach cable has a maximum reach of 2.0m (6.6ft). It is 100% Dell® to Intel® compatible and has been programmed, uniquely serialized, and data-traffic and application tested to ensure that it is compliant and functional. This direct attach cable will initialize and perform identically to Dell® and Intel®'s individual cables and is built to meet or exceed Dell® and Intel®'s specifications, and comply with MSA (Multi-Source Agreement) standards. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Skylane's transceivers are RoHS compliant and lead-free.

### Features:

- Up to 100 Gbps bi-directional data links
- AC coupled inputs and outputs
- Compliant with QSFP28 MSA specifications
- All-metal housing for superior EMI performance
- Single power supply 3.3V, low power consumption
- 100 Ohm differential impedance
- ROHS Compliant
- Operating Temperature: 0 to 70 Celsius



### Applications:

- 100GBase Ethernet

---

*For your product safety, please read the following information carefully before any manipulation of the transceiver:*



#### **ESD**

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



#### **LASER SAFETY**

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

*The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.*

---

## General Specifications

| Parameter             | Symbol | Min. | Typ. | Max.       | Unit     | Notes |
|-----------------------|--------|------|------|------------|----------|-------|
| Bit Error Rate        | BER    |      |      | $10^{-12}$ |          |       |
| Operating Temperature | Tc     | 0    |      | 70         | °C       | 1     |
| Storage Temperature   | Tstg   | -40  |      | 85         | °C       | 2     |
| Input Voltage         | Vcc    | 3.14 | 3.3  | 3.46       | V        | 3     |
| Cable Impedance       | Z      | 90   | 100  | 110        | $\Omega$ |       |
| Product Weight        | GD     |      | 145  | g/PCS      |          | 4     |
| Cable Weight          | GC     |      | 64   | g/M        |          |       |
| Dust Cap Weight       | GQ     |      | 1.40 | g/PCS      |          |       |

### Notes:

1. Case temperature.
2. Ambient temperature.
3. For electrical power interface.
4. For example, the weight of a 5m cable with 26AWG is  $190 + 110 * (5-1) + 1.40 * 2 = 632.8g$ .

## Cable Dimensions and Insertion Loss Level

| Length | Wire Gauge AWG | Cable Diameter OD (mm) | Minimum Bending Radius R (mm) | Insertion Loss Level |
|--------|----------------|------------------------|-------------------------------|----------------------|
| 2m     | 30WG           | 6.9                    | 35                            | CA-25G-N             |

### Notes:

1. Cable insertion loss classification standard: IEEE 802.3by 110-10.

## Length Tolerance

| Nominal Length L1 (m) | Tolerance Range $\pm$ (cm) |
|-----------------------|----------------------------|
| $L1 \leq 3$           | 2                          |

## Pin Descriptions


| Pin | Symbol  | Name/Description                                                                      | Notes |
|-----|---------|---------------------------------------------------------------------------------------|-------|
| 1   | GND     | Module Ground.                                                                        | 5     |
| 2   | Tx2-    | Transmitter Inverted Data Input. LAN2.                                                |       |
| 3   | Tx2+    | Transmitter Non-Inverted Data Input. LAN2.                                            |       |
| 4   | GND     | Module Ground.                                                                        | 5     |
| 5   | Tx4-    | Transmitter Inverted Data Input. LAN4.                                                |       |
| 6   | Tx4+    | Transmitter Non-Inverted Data Input. LAN4.                                            |       |
| 7   | GND     | Module Ground.                                                                        | 5     |
| 8   | ModSelL | Module Select Pin. The module responds to 2-wire serial communication when low level. | 1     |
| 9   | ResetL  | Module Reset.                                                                         | 2     |
| 10  | VccRx   | +3.3V Receiver Power Supply.                                                          |       |
| 11  | SCL     | 2-Wire Serial Interface Clock.                                                        |       |
| 12  | SDA     | 2-Wire Serial Interface Data.                                                         |       |
| 13  | GND     | Module Ground.                                                                        | 5     |
| 14  | Rx3+    | Receiver Non-Inverted Data Output. LAN3.                                              |       |
| 15  | Rx3-    | Receiver Inverted Data Output. LAN3.                                                  |       |
| 16  | GND     | Module Ground.                                                                        | 5     |
| 17  | Rx1+    | Receiver Non-Inverted Data Output. LAN1.                                              |       |
| 18  | Rx1-    | Receiver Inverted Data Output. LAN1.                                                  |       |
| 19  | GND     | Module Ground.                                                                        | 5     |
| 20  | GND     | Module Ground.                                                                        | 5     |
| 21  | Rx2-    | Receiver Inverted Data Output. LAN2.                                                  |       |
| 22  | Rx2+    | Receiver Non-Inverted Data Output. LAN2.                                              |       |
| 23  | GND     | Module Ground.                                                                        | 5     |
| 24  | Rx4-    | Receiver Inverted Data Output. LAN4.                                                  |       |
| 25  | Rx4+    | Receiver Non-Inverted Data Output. LAN4.                                              |       |
| 26  | GND     | Module Ground.                                                                        | 5     |
| 27  | ModPrsL | The module is inserted into the indicator pin and grounded in the module.             | 3     |
| 28  | IntL    | Interrupt.                                                                            | 4     |
| 29  | VccTx   | +3.3V Transmitter Power Supply.                                                       |       |
| 30  | Vcc1    | +3.3V Power Supply.                                                                   |       |
| 31  | LPMODE  | Low-Power Mode.                                                                       | 5     |
| 32  | GND     | Module Ground.                                                                        | 5     |
| 33  | Tx3+    | Transmitter Non-Inverted Data Input. LAN3.                                            |       |
| 34  | Tx3-    | Transmitter Inverted Data Input. LAN3.                                                |       |

|    |      |                                            |   |
|----|------|--------------------------------------------|---|
| 35 | GND  | Module Ground.                             | 5 |
| 36 | Tx1+ | Transmitter Non-Inverted Data Input. LAN1. |   |
| 37 | Tx1- | Transmitter Inverted Data Input. LAN1.     |   |
| 38 | GND  | Module Ground.                             | 5 |


#### Notes:

1. ModSelL is the input pin. The module responds to 2-wire serial communication commands when it is held "low" by the host. ModSelL allows multiple QSFP modules to be used on a single 2-wire interface bus. If ModSelL is "high," the module will not respond to any 2-wire interface communication from the host. ModSelL has internal pull-up resistors in the module.
2. The module restart pin, when the low level on the ResetL pin lasts longer than the minimum pulse length, resets the module and restores all user modules to their default state. When performing reset device, the host should ignore all status bits. Until the module reset interrupt is completed, please note that during hot plugging, the module will issue this information to complete the reset interrupt without resetting.
3. This pin is active "high," indicating that the module is running under a low-power module.
4. IntL is the output pin, which is the open collector output and must be pulled up to the Vcc on the motherboard. When it is "low," it indicates that the module may malfunction. The host uses a 2-wire serial interface to identify the interrupt source.
5. The circuit ground is internally isolated from the chassis ground.

#### Electrical Pad Layout

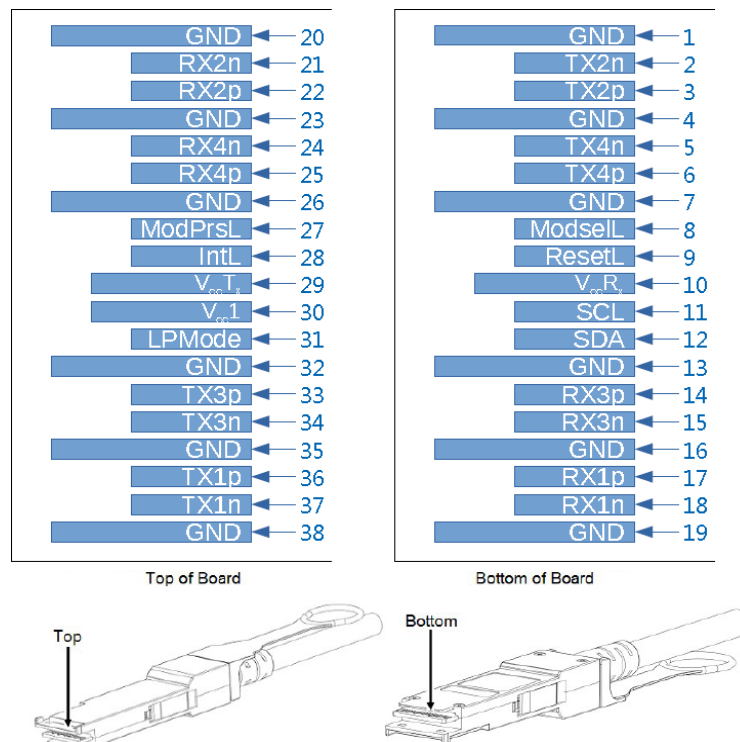

**Mechanical Specifications**

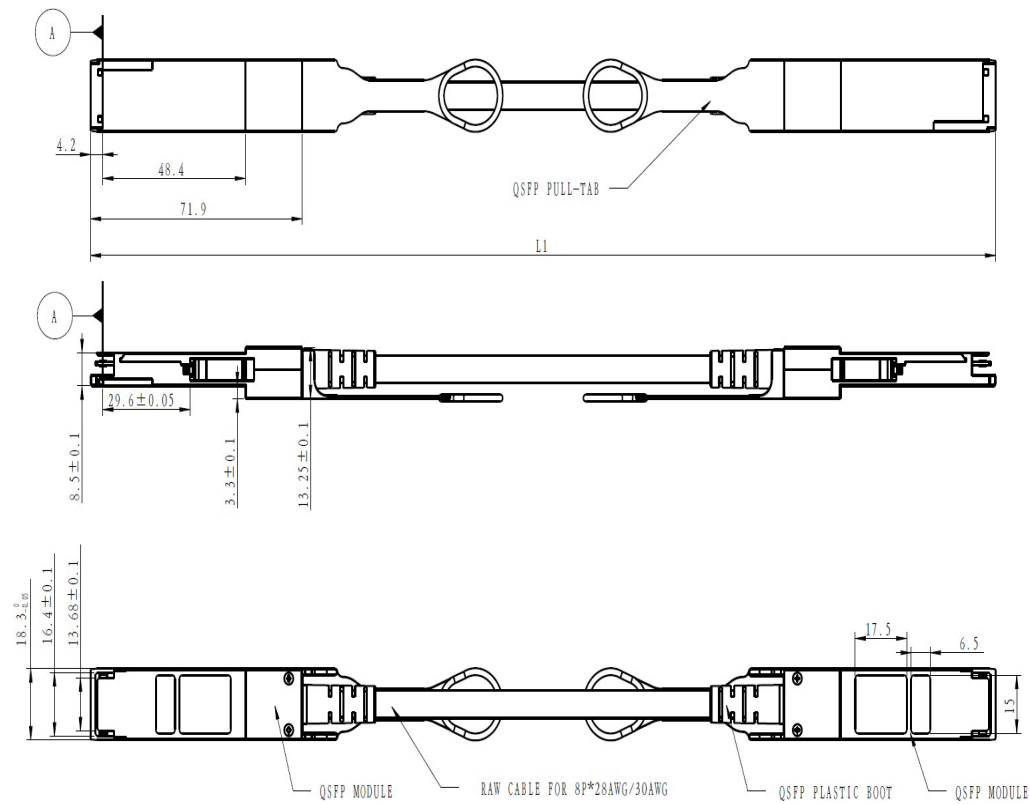

All Dimensions are  $\pm 0.2$ mm Unless Otherwise Specified.  
Unit: mm

# About Skylane Optics

Skylane is a leading provider of transceivers for optical communication.

We offer an extensive portfolio for the enterprise, access, datacenter and metropolitan fiber optical market as well as for smart home applications and home networks.

We cover the European, South American and North American market with a strong partner network and have offices in Belgium, Brazil, Sweden and USA.

Our offerings are characterized by high quality and performance. In combination with our strong technical support, we enable our customers to build cost optimized network solutions.

We offer an extensive range of high-quality products including transceivers (Optical and copper), Active Optical Cable (AOC), Direct Attach Cable (DAC), Mux/Demux, Coding Box.

