



## SFP-1GB-BX34U-40-SC-C-SKY

Cisco® Compatible 1000Base-BX SFP Transceiver (SMF, 1310nmTx/1490nmRx, 40km, SC, DOM)

### Product Description

This Cisco® compatible SFP transceiver provides 1000Base-BX throughput up to 40km over single-mode fiber (SMF) using a wavelength of 1310nmTx/1490nmRx via an SC connector. This bidirectional unit must be used with another transceiver or network appliance of complementing wavelengths. It is guaranteed to be 100% compatible with the equivalent Cisco® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Skylane's transceivers are RoHS compliant and lead-free.

### Features:

- SFF-8472 and MSA Compliant
- Simplex SC Connector
- Up to 1.25Gbps data links
- Single 3.3V power supply
- Commercial Temperature 0 to 70 Celsius
- Single-mode fiber
- Metal with lower EMI
- Support Hot Pluggable
- RoHS compliant and Lead Free



### Applications:

- 1000Base Ethernet

---

*For your product safety, please read the following information carefully before any manipulation of the transceiver:*



#### **ESD**

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



#### **LASER SAFETY**

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

*The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.*

---

## Absolute Maximum Ratings

| Parameter                   |     | Symbol           | Min. | Typ.  | Max. | Unit |
|-----------------------------|-----|------------------|------|-------|------|------|
| Maximum Supply Voltage      |     | V <sub>cc</sub>  | -0.5 |       | 3.6  | V    |
| Storage Temperature         |     | T <sub>stg</sub> | -40  |       | 85   | °C   |
| Operating Case Temperature  |     | T <sub>c</sub>   | 0    |       | 70   | °C   |
| Operating Relative Humidity |     | RH               | 5    |       | 85   | %    |
| Data Rate                   | GBE |                  |      | 1.25  |      | Gbps |
|                             | FC  |                  |      | 1.063 |      | Gbps |

## Notes:

1. Exceeding any one of these values may destroy the device immediately.

## Electrical Characteristics

| Parameter                     |         | Symbol           | Min. | Typ. | Max.                 | Unit  | Notes |
|-------------------------------|---------|------------------|------|------|----------------------|-------|-------|
| Power Supply Voltage          |         | V <sub>cc</sub>  | 3.13 | 3.3  | 3.47                 | V     |       |
| Power Supply Current          |         | I <sub>cc</sub>  |      |      | 300                  | mA    |       |
| Transmitter                   |         |                  |      |      |                      |       |       |
| LVPECL Differential Inputs    |         | V <sub>IN</sub>  | 400  |      | 1800                 | mVp-p | 1     |
| Input Differential Impedance  |         | Z <sub>IN</sub>  | 90   | 100  | 110                  | Ω     | 2     |
| Tx_Disable                    | Disable |                  | 2    |      | V <sub>cc</sub> +0.3 | V     |       |
|                               | Enable  |                  | 0    |      | 0.8                  | V     |       |
| Tx_Fault                      | Fault   |                  | 2    |      | V <sub>cc</sub> +0.3 | V     |       |
|                               | Normal  |                  | 0    |      | 0.8                  | V     |       |
| Receiver                      |         |                  |      |      |                      |       |       |
| LVPECL Differential Outputs   |         | V <sub>OUT</sub> | 400  |      | 2000                 | mVp-p | 3     |
| Output Differential Impedance |         | Z <sub>OUT</sub> | 90   | 100  | 110                  | Ω     |       |
| Tx_Disable Assert Time        |         | T <sub>off</sub> |      |      | 10                   | us    |       |
| Rx_LOS                        | LOS     |                  | 2    |      | V <sub>cc</sub> +0.3 | V     |       |
|                               | Normal  |                  | 0    |      | 0.8                  | V     |       |
| MOD_DEF(0.2)                  |         | V <sub>OH</sub>  | 2.5  |      | V <sub>cc</sub> +0.3 | V     | 4     |
|                               |         | V <sub>OL</sub>  | 0    |      | 0.5                  | V     | 4     |

## Notes:

1. LVPECL logic. Internally AC coupled inputs.
2. R<sub>IN</sub>>100kΩ @DC.
3. LVPECL logic. Internally AC coupled outputs.
4. With Serial ID.

## Optical Characteristics

| Parameter                 | Symbol          | Min.                     | Typ.       | Max. | Unit | Notes |
|---------------------------|-----------------|--------------------------|------------|------|------|-------|
| 9µm Core Diameter SMF     | L               |                          | 40         |      | km   |       |
| Data Rate                 |                 |                          | 1.063/1.25 |      | Gbps |       |
| Transmitter               |                 |                          |            |      |      |       |
| Center Wavelength         | $\lambda_C$     | 1290                     | 1310       | 1330 | nm   |       |
| Spectral Width (-20dB)    | $\Delta\lambda$ |                          |            | 1    | nm   |       |
| Average Output Power      | POUT            | -5                       |            | 0    | dBm  | 1     |
| Extinction Ratio          | ER              | 9                        |            |      | dB   | 2     |
| Rise/Fall Time (20-80%)   | $T_r/T_f$       |                          |            | 0.26 | ns   |       |
| Total Jitter              | TJ              |                          |            | 0.43 | UI   |       |
| Output Optical Eye        |                 | Compliant with IEEE802.3 |            |      |      | 2     |
| POUT @Tx_Disable Asserted | POUT            |                          |            | -35  | dBm  |       |
| Receiver                  |                 |                          |            |      |      |       |
| Center Wavelength         | $\lambda_C$     | 1450                     |            | 1540 | nm   |       |
| Receiver Sensitivity      | Pmin            |                          |            | -24  | dBm  | 3     |
| Receiver Overload         | Pmax            | -3                       |            |      | dBm  |       |
| LOS De-Assert             | LOSD            |                          |            | -25  | dBm  |       |
| LOS Assert                | LOSA            | -35                      |            |      | dBm  |       |
| LOS Hysteresis            |                 | 1                        |            | 4    | dB   | 3     |

### Notes:

1. Output power is power coupled into a 9/125µm single-mode fiber.
2. Filtered. Measured with a PRBS  $2^7-1$  test pattern @1250Mbps.
3. Minimum average optical power is measured at  $BER < 1E^{-12}$  with  $2^7-1$  PRBS and ER=9dB.

## Pin Descriptions

| Pin | Symbol      | Name/Description                                          | Plug Sequence | Notes |
|-----|-------------|-----------------------------------------------------------|---------------|-------|
| 1   | VeeT        | Transmitter Ground.                                       | 1             | 5     |
| 2   | Tx_Fault    | Transmitter Fault Indication.                             | 3             | 1     |
| 3   | Tx_Disable  | Transmitter Disable. Module Disables on “High” or “Open.” | 3             | 2     |
| 4   | MOD-DEF2    | Module Definition 2. 2-Wire Serial Interface Data.        | 3             | 3     |
| 5   | MOD-DEF1    | Module Definition 1. 2-Wire Serial Interface Clock.       | 3             | 3     |
| 6   | MOD-DEF0    | Module Definition 0. Grounded Within the Module.          | 3             | 3     |
| 7   | Rate Select | Not Connected.                                            | 3             | 7     |
| 8   | LOS         | Loss of Signal.                                           | 3             | 4     |
| 9   | VeeR        | Receiver Ground.                                          | 1             | 5     |
| 10  | VeeR        | Receiver Ground.                                          | 1             | 5     |
| 11  | VeeR        | Receiver Ground.                                          | 1             | 5     |
| 12  | RD-         | Inverted Received Data Out.                               | 3             |       |
| 13  | RD+         | Received Data Out.                                        | 3             | 6     |
| 14  | VeeR        | Receiver Ground.                                          | 1             | 5     |
| 15  | VccR        | Receiver Power. 3.3±5%.                                   | 2             | 6     |
| 16  | VccT        | Transmitter Power. 3.3±5%.                                | 2             | 6     |
| 17  | VeeT        | Transmitter Ground.                                       | 1             | 5     |
| 18  | TD+         | Transmit Data In.                                         | 3             |       |
| 19  | TD-         | Inverted Transmit Data In.                                | 3             |       |
| 20  | VeeT        | Transmitter Ground.                                       | 1             | 5     |


### Notes:

1. Tx\_Fault is an open collector/drain output which should be pulled up with a 4.7kΩ to 10kΩ resistor on the host board. When “high,” the output indicates a laser fault of some kind. “Low” indicates normal operation.
2. Tx\_Disable is an input that is used to shut down the transmitter optical output. It is pulled up in the module with a 4.7kΩ to 10kΩ resistor. Its states are the following:
  - Low (0V-0.8V): Transmitter On
  - (>0.8V, <2.0V): Undefined
  - High (2.0V-3.465V): Transmitter Disabled
  - Open: Transmitter Disabled.
3. MOD-DEF0, 1, and 2. These are the module definition pins. They should be pulled up with a 4.7kΩ to 10kΩ resistor on the host board.
  - MOD-DEF0 is grounded by the module to indicate that the module is present.
  - MOD-DEF1 is the clock line of the 2-wire serial interface for serial ID.
  - MOD-DEF2 is the data line of the 2-wire serial interface for serial ID.
4. LOS (Loss of Signal) is an open collector/drain output which should be pulled up with a 4.7kΩ to 10kΩ


resistor. When “high,” this output indicates that the received optical power is below the worst-case receiver sensitivity. “Low” indicates normal operation.

5. VeeR and VeeT may be internally connected within the SFP module.
6. VccR and VccT are the receiver and transmitter power supplies. They are defined as  $3.3V \pm 5\%$  at the SFP connector pin. Maximum supply current is 300mA. VccR and VccT may be internally connected within the SFP transceiver module.
7. Function not available.

## Electrical Pin-Out Details

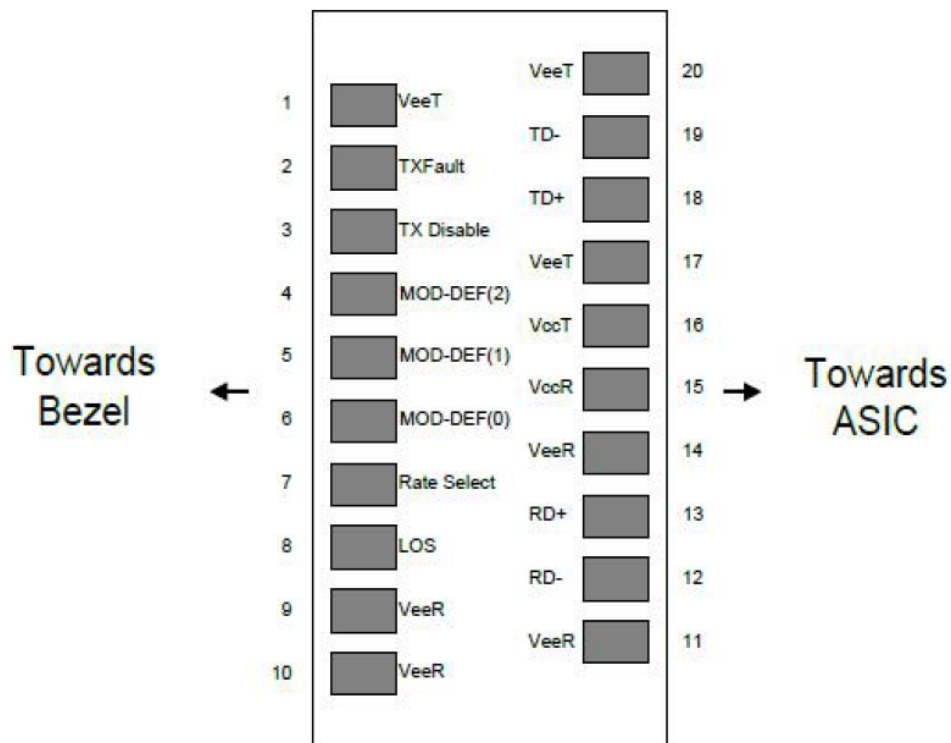


## Recommend Circuit Schematic

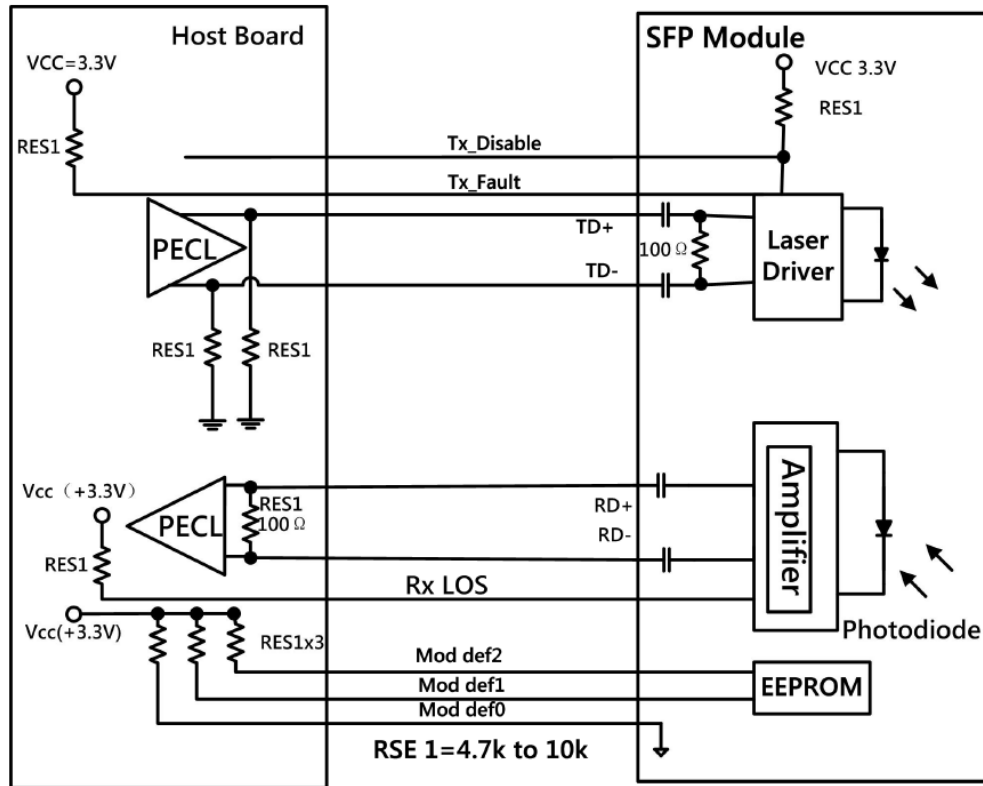


## EEPROM

The serial interface uses the 2-wire serial CMOS EEPROM protocol defined for the ATMEL AT24c02/04 family of components. When the serial protocol is activated, the host generates the serial clock signal (SCL). The positive edge clocks data into those segments of the EEPROM that are not write protected within the SFP+ transceiver. The negative edge clocks data from the SFP+ transceiver. The serial data signal (SDA) is bidirectional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially. The module provides diagnostic information about the present operating conditions. The transceiver generates this diagnostic data by digitization of internal analog signals. Calibration and alarm/warning threshold data is written during device manufacture. Received power monitoring, transmitted power monitoring, bias current monitoring, supply voltage monitoring, and temperature monitoring all are implemented. If the module is defined as external calibrated, the diagnostic data are raw A/D values and must be converted to real world units using calibration constants stored in EEPROM locations 56 – 95 at wire serial bus address A2h. The Digital Diagnostic memory-map specific data field define as following. For detailed EEPROM information, please refer to the related document of SFF8472 Rev 10.2.


## 2 wire address 1010000X(A0h)

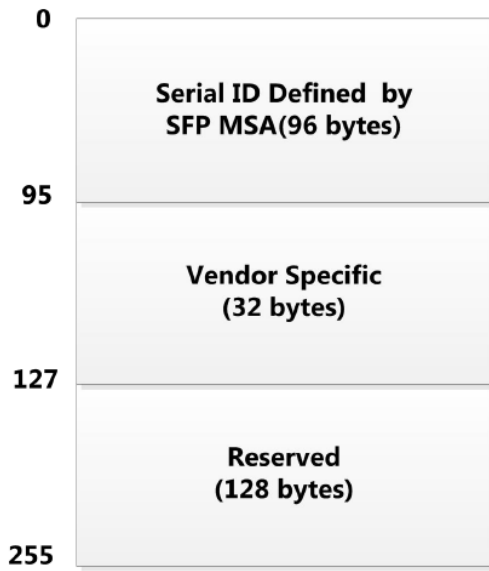

## 2 wire address 1010000X (A2h)

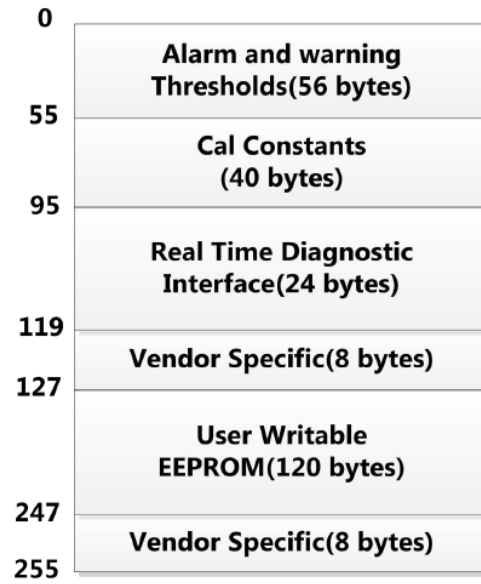

## Mechanical Specifications

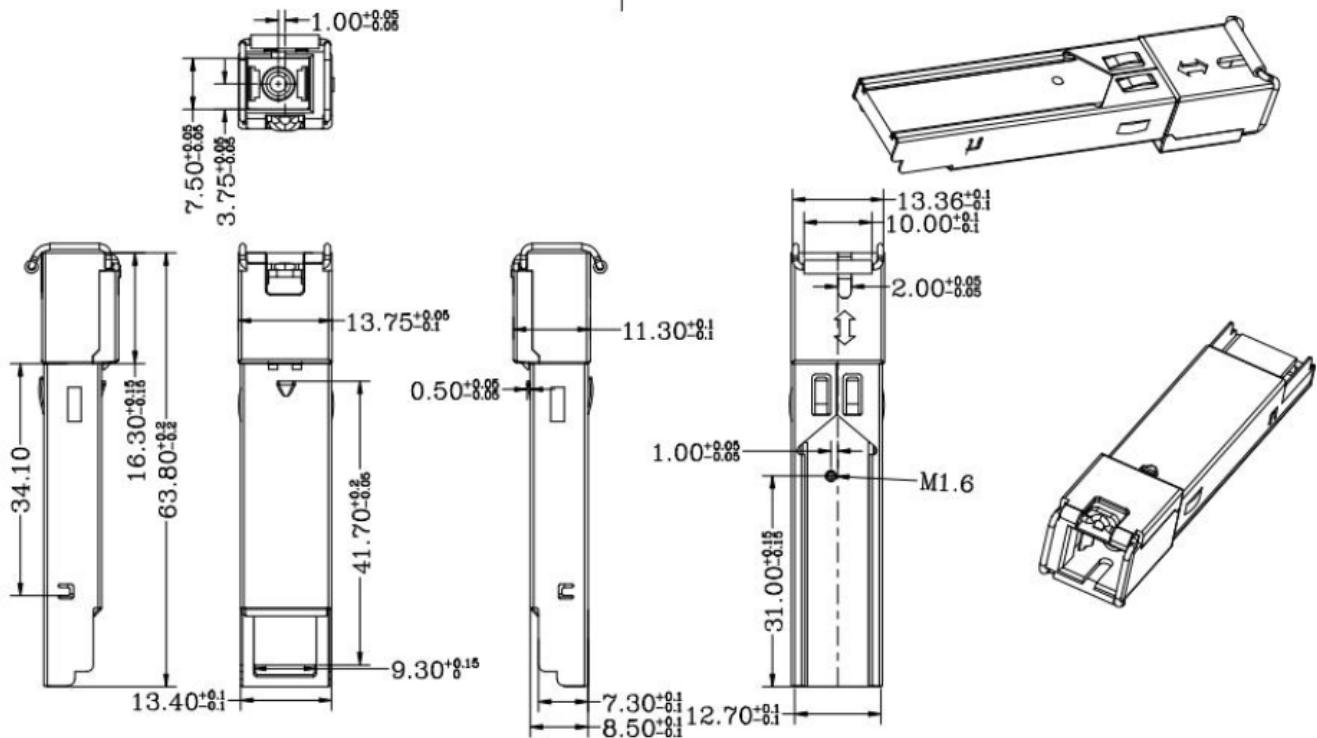

# About Skylane Optics

Skylane is a leading provider of transceivers for optical communication.

We offer an extensive portfolio for the enterprise, access, datacenter and metropolitan fiber optical market as well as for smart home applications and home networks.

We cover the European, South American and North American market with a strong partner network and have offices in Belgium, Brazil, Sweden and USA.

Our offerings are characterized by high quality and performance. In combination with our strong technical support, we enable our customers to build cost optimized network solutions.

We offer an extensive range of high-quality products including transceivers (Optical and copper), Active Optical Cable (AOC), Direct Attach Cable (DAC), Mux/Demux, Coding Box.

