



SPB34010100DGT0

Waystream® PacketFront Compatible 10GBase-BX SFP+ Transceiver (SMF, 1310nmTx/1490nmRx, 10km, LC, DOM)

Product Description

This Waystream® PacketFront compatible SFP+ transceiver provides 10GBase-BX throughput up to 10km over single-mode fiber (SMF) using a wavelength of 1310nmTx/1490nmRx via an LC connector. This bidirectional unit must be used with another transceiver or network appliance of complementing wavelengths. It can operate at temperatures between 0 and 70C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with Waystream® PacketFront. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Skylane's transceivers are RoHS compliant and lead-free.

Features:

- Operating Data Rate up to 10.31Gbps
- Hot-Pluggable SFP+
- Single 3.3V Power Supply
- Compliant with MSA SFP+ Specification
- Simplex LC Connector
- 10km with 9/125µm SMF
- Operating Temperature: 0 to 70 Celsius
- Power Consumption: 1.5W
- RoHS Compliant and Lead-Free



Applications:

- 10GBase-BX Ethernet
- Access, Metro and Enterprise
- 8x/10x Fibre Channel

For your product safety, please read the following information carefully before any manipulation of the transceiver:



ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Operating Case Temperature	Tc	0		70	°C	
Storage Temperature	Tstg	-40		85	°C	
Relative Humidity	RH	5		85	%	
Supply Voltage	Vcc	-0.5		3.6	V	
Data Rate	DR	1.25		10.3125	Gbps	
Power Budget		9			dB	

Electrical Characteristics

Parameter		Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage		Vcc	3.13	3.3	3.47	V	
Power Supply Current		Icc			450	mA	
Transmitter							
CML Differential Input		VIN	150		1200	mVp-p	1
Input AC Common-Mode Voltage			0		25	mV	RMS
Input Differential Impedance		ZIN	85	100	115	Ω	2
Tx_Disable	High		2		Vcc	V	
	Low		0		0.8	V	
Tx_Fault	High		2		Vcc+0.3	V	3
	Low		0		0.5	V	4
Receiver							
CML Differential Output		VOUT	350		700	mVp-p	5
Output Differential Impedance		ZOUT	85	100	115	Ω	
Rx_LOS	High		2		Vcc+0.3	V	3
	Low		0		0.8	V	4
MOD_DEF(0.2)		VOH	2.5			V	6
		VOL	0		0.5	V	6

Notes:

1. AC coupled inputs.
2. RIN > 100kΩ @ DC.
3. Io = 400μA; Host_Vcc
4. Io = -4.0mA
5. AC coupled outputs.
6. With serial ID.

Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Transmitter						
Center Wavelength	λ_C	1300	1310	1320	nm	
Spectral Width (-20dB)	$\Delta\lambda$			1	nm	
Average Output Power	POUT	-5		0	dBm	1
Extinction Ratio	ER	3.5			dB	
Average Power of Off Transmitter	Poff			-30	dBm	
Side-Mode Suppression Ratio	SMSR	30			dB	
Transmitter Dispersion Penalty	TDP			2	dB	
Tx Disable Assert Time	Toff			10	us	
Receiver						
Center Wavelength	λ_C	1480	1490	1580	nm	
Receiver Sensitivity	Pmin			-14	dBm	2
Receiver Overload	Pmax	0.5			dBm	
LOS Assert	LOSA	-30			dBm	
LOS De-Assert	LOSD			-15	dBm	
LOS Hysteresis	LOSH	0.5			dB	

Notes:

1. Output is coupled into a 9/125 μ m SMF.
2. Minimum average optical power is measured at BER less than $1E^{-12}$. The measure pattern is PRBS2³¹-1.

Pin Descriptions


Pin	Symbol	Name/Description	Plug Seq.	Notes
1	VeeT	Transmitter Ground.	1	5
2	Tx_Fault	Transmitter Fault Indication.	3	1
3	Tx_Disable	Transmitter Disable. Module disables on “high” or “open.”	3	2
4	SDA	Transmitter Disable. 2-Wire Serial ID Interface.	3	3
5	SCL	Module Definition 2. 2-Wire Serial ID Interface.	3	3
6	MOD_ABS	Module Definition 1. Grounded within the module.	3	3
7	RS0	Rx Rate Select (LVTTTL). No User Connection. Pin Not Used.	3	
8	LOS	Loss of Signal.	3	4
9	RS0	Tx Rate Select (LVTTTL). No User Connection. Pin Not Used.	1	
10	VeeR	Receiver Ground.	1	5
11	VeeR	Receiver Ground.	1	5
12	RD-	Receiver Inverse Data Out.	3	6
13	RD+	Receiver Data Out.	3	6
14	VeeR	Receiver Ground.	1	5
15	VccR	3.3 ± 5% Receiver Power.	2	7
16	VccT	3.3 ± 5% Transmitter Power.	2	7
17	VeeT	Transmitter Ground.	1	5
18	TD+	Transmitter Data In.	3	8
19	TD-	Transmitter Inverse Data In.	3	8
20	VeeT	Transmitter Ground.	1	5

Notes:


1. Tx_Fault is an open collector/drain output that should be pulled up with a 4.7kΩ to 10kΩ resistor on the host board. When “high,” output indicates a laser fault of some kind. “Low” indicates normal operation. In the “low” state, the output will be pulled to <0.8V.
2. Tx_Disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7kΩ to 10kΩ resistor. Its states are:
 - Low (0V – 0.8V): Transmitter On
 - (>0.8V, <2.0V): Undefined
 - High (2.0V – 3.465V): Transmitter Disabled
 - Open: Transmitter Disabled.
3. Modulation absent. Connected to VeeT or VeeR in the module.
4. LOS (Loss of Signal) is an open collector/drain output that should be pulled up with a 4.7kΩ to 10kΩ resistor. When “high,” this output indicates that the received optical power is below the worst-case receiver sensitivity (as defined by the standard in use). “Low” indicates normal operation. In the “low” state, the output will be pulled to <0.8V.
5. VeeR and VeeT may be internally connected within the SFP module.

6. RD-/+. These are the differential receiver outputs. They are AC-coupled, 100Ω differential lines that should be terminated with 100Ω (differential) at the user SERDES.
7. VccR and VccT are the receiver and transmitter power supplies. They are defined as 3.3V ± 5% at the SFP connector pin.
8. TD-/+. These are the differential transmitter inputs. They are AC-coupled, differential lines with 100Ω differential termination inside the module.


Electrical Pad Layout

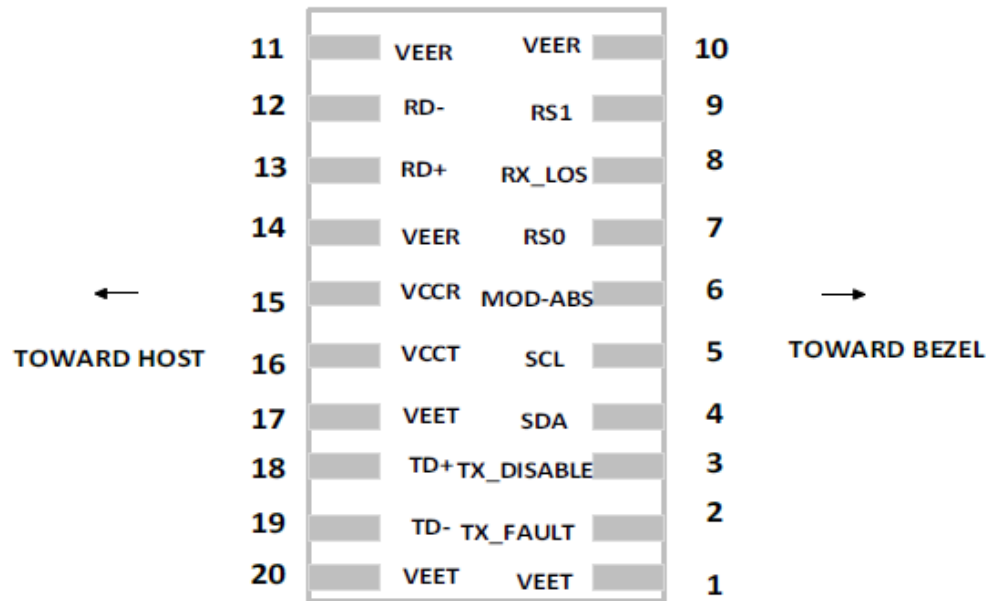

Recommended Circuit Schematic

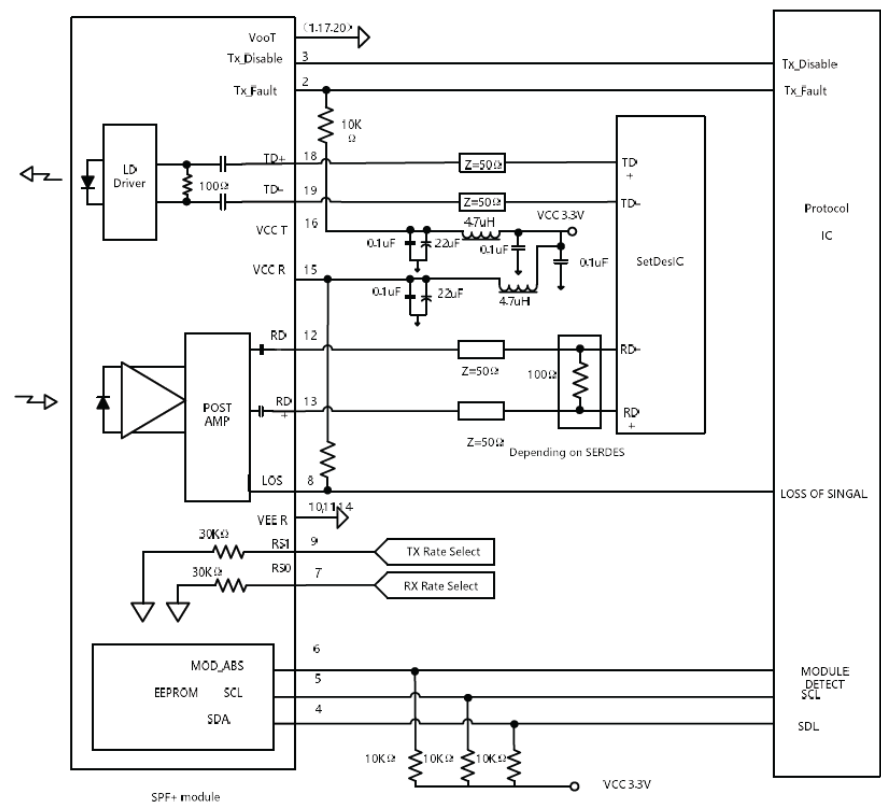

Mechanical Specifications

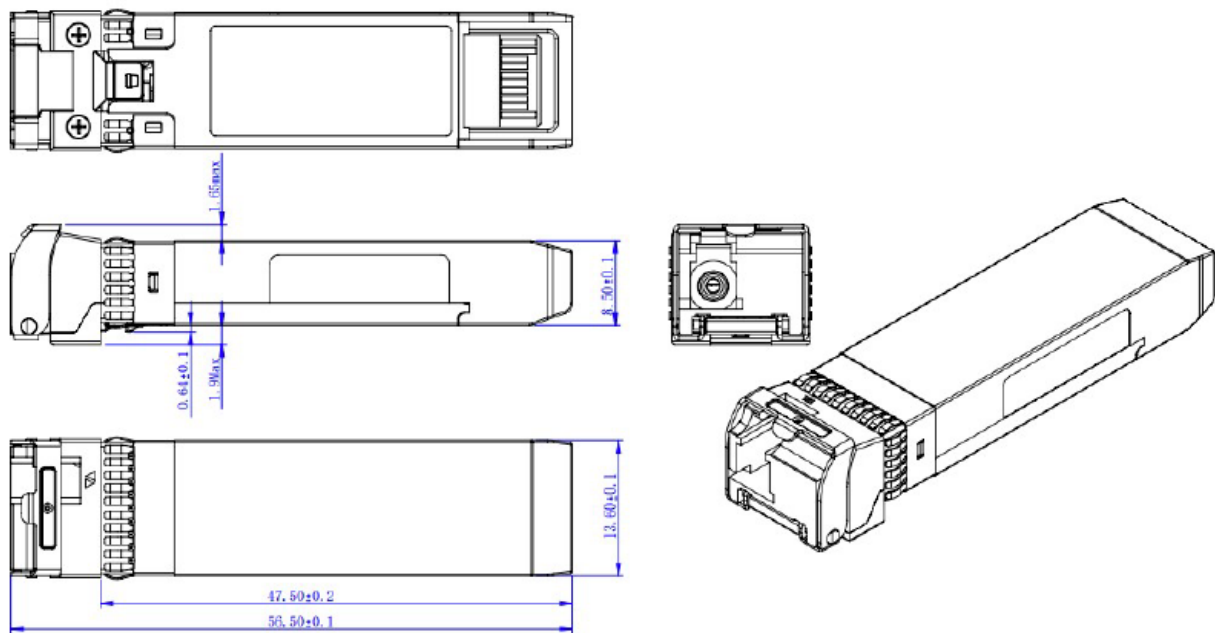

About Skylane Optics

Skylane is a leading provider of transceivers for optical communication.

We offer an extensive portfolio for the enterprise, access, datacenter and metropolitan fiber optical market as well as for smart home applications and home networks.

We cover the European, South American and North American market with a strong partner network and have offices in Belgium, Brazil, Sweden and USA.

Our offerings are characterized by high quality and performance. In combination with our strong technical support, we enable our customers to build cost optimized network solutions.

We offer an extensive range of high-quality products including transceivers (Optical and copper), Active Optical Cable (AOC), Direct Attach Cable (DAC), Mux/Demux, Coding Box.

